

# [MS-ABTP]: Automatic Bluetooth Pairing Protocol

---

## Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft [Open Specification Promise](#) or the [Community Promise](#). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting [iplg@microsoft.com](mailto:iplg@microsoft.com).
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights. For a list of Microsoft trademarks, visit [www.microsoft.com/trademarks](http://www.microsoft.com/trademarks).
- **Fictitious Names.** The example companies, organizations, products, domain names, email addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

**Reservation of Rights.** All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

**Tools.** The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

## Revision Summary

Date	Revision History	Revision Class	Comments
08/08/2013	1.0	New	Released new document.
11/14/2013	2.0	Major	Significantly changed the technical content.

# Contents

<b>1 Introduction</b>	<b>5</b>
1.1 Glossary	5
1.2 References	6
1.2.1 Normative References	6
1.2.2 Informative References	6
1.3 Overview	7
1.4 Relationship to Other Protocols	8
1.5 Prerequisites/Preconditions	8
1.6 Applicability Statement	8
1.7 Versioning and Capability Negotiation	9
1.8 Vendor-Extensible Fields	9
1.9 Standards Assignments	9
<b>2 Messages</b>	<b>10</b>
2.1 Transport	10
2.2 Message Syntax	10
2.2.1 Enumerations	10
2.2.1.1 MessageId Enumeration	10
2.2.2 Structures	10
2.2.2.1 CommonHeader Structure	10
2.2.3 Messages	11
2.2.3.1 Challenge Message	11
2.2.3.2 PairingRequired Message	11
2.2.3.3 ProtocolErrorResponse Message	11
2.2.3.4 ReadyToPair Message	12
2.2.3.5 Response Message	12
<b>3 Protocol Details</b>	<b>14</b>
3.1 Client Details	14
3.1.1 Abstract Data Model	15
3.1.2 Timers	16
3.1.3 Initialization	16
3.1.4 Higher-Layer Triggered Events	16
3.1.4.1 Pairing Request	16
3.1.4.2 Cancellation	16
3.1.5 Message Processing Events and Sequencing Rules	16
3.1.5.1 ReadyToPair	16
3.1.5.2 Challenge	17
3.1.5.3 Response	17
3.1.5.4 Other Messages	17
3.1.6 Timer Events	17
3.1.6.1 ClientGuardTimer	17
3.1.7 Other Local Events	17
3.1.7.1 Successful Connection of Control Channel	17
3.1.7.2 Failed Connection of Control Channel	18
3.1.7.3 Disconnect Event of Control Channel	18
3.1.7.4 Pairing Indication	18
3.2 Server Details	18
3.2.1 Abstract Data Model	19
3.2.2 Timers	20

3.2.3	Initialization .....	20
3.2.4	Higher-Layer Triggered Events .....	20
3.2.4.1	Shutdown .....	20
3.2.5	Message Processing Events and Sequencing Rules .....	20
3.2.5.1	PairingRequired .....	20
3.2.5.2	Response .....	20
3.2.5.3	Challenge .....	21
3.2.5.4	Other Messages .....	21
3.2.6	Timer Events .....	21
3.2.6.1	GuardTimer .....	21
3.2.6.2	PausingTimer .....	21
3.2.7	Other Local Events .....	21
3.2.7.1	Connect Event .....	21
3.2.7.2	Disconnect Event .....	22
3.2.7.3	Pairing indication .....	22
<b>4</b>	<b>Protocol Examples .....</b>	<b>23</b>
4.1	PairingRequired .....	23
4.2	ReadyToPair .....	23
4.3	Challenge .....	23
4.4	Response .....	23
<b>5</b>	<b>Security .....</b>	<b>24</b>
5.1	Security Considerations for Implementers .....	24
5.2	Index of Security Parameters .....	24
<b>6</b>	<b>Appendix A: Product Behavior .....</b>	<b>25</b>
<b>7</b>	<b>Change Tracking .....</b>	<b>26</b>
<b>8</b>	<b>Index .....</b>	<b>29</b>

# 1 Introduction

This document specifies the Automatic Bluetooth Pairing Protocol. This protocol facilitates the establishment of a secure, trusted **Bluetooth (BT)** pairing relationship between two devices without requiring any user interaction at the time of pairing. To use the Automatic Bluetooth Pairing Protocol, the Bluetooth **media access control address (MAC address)** of the **server** device and a shared secret are exchanged between the two devices using an **out-of-band (OOB)** mechanism.

Sections [1.8](#), [2](#), and [3](#) of this specification are normative and contain [\[RFC2119\]](#) language. Sections [1.5](#) and [1.9](#) are also normative but cannot contain [\[RFC2119\]](#) language. All other sections and examples in this specification are informative.

## 1.1 Glossary

The following terms are defined in [\[MS-GLOS\]](#):

**binary large object (BLOB)**  
**BLOB**  
**challenge/response authentication**  
**globally unique identifier (GUID)**  
**man in the middle (MITM)**  
**network byte order**  
**server**  
**type-length-value (TLV)**

The following terms are specific to this document:

**Bluetooth (BT):** A wireless technology standard which is managed by the Bluetooth Special Interest Group and that is used for exchanging data over short distances between mobile and fixed devices.

**Bluetooth pairing:** A process in which two devices that are both running the Bluetooth technology establish a connection for communication by using an agreed upon security key.

**challenge value:** The request that is sent during challenge/response authentication. The value received in response to the challenge request is authenticated for validity.

**client:** The sending endpoint of a Web services request message, and receiver of any resulting Web services response message.

**media access control address (MAC address):** A hardware address that uniquely identifies each interface on a physical network for communication with other interfaces. It is used by the media access control sublayer of the data link layer of a network connection.

**out-of-band (OOB):** A process for authenticating a user where two communication channels are used simultaneously between two devices or roles. A cellular network is an example of a channel that is commonly used for performing out-of-band authentication.

**response value:** The value that is sent in response to a challenge request during challenge/response authentication. The response value is authenticated against the challenge value.

**MAY, SHOULD, MUST, SHOULD NOT, MUST NOT:** These terms (in all caps) are used as described in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

## 1.2 References

References to Microsoft Open Specifications documentation do not include a publishing year because links are to the latest version of the documents, which are updated frequently. References to other documents include a publishing year when one is available.

A reference marked "(Archived)" means that the reference document was either retired and is no longer being maintained or was replaced with a new document that provides current implementation details. We archive our documents online [\[Windows Protocol\]](#).

### 1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact [dochelp@microsoft.com](mailto:dochelp@microsoft.com). We will assist you in finding the relevant information. Please check the archive site, <http://msdn2.microsoft.com/en-us/library/E4BD6494-06AD-4aed-9823-445E921C9624>, as an additional source.

[BT-RFCOMM] Bluetooth Special Interest Group, "Bluetooth Specification version 1.1, Part F:1, RFCOMM with TS 07.10, Serial Port Emulation", June 2003, <http://www.bluetooth.org>

**Note** There is a charge to download the specification.

[BT-SDP] Bluetooth Special Interest Group, "Bluetooth Specification Version 4.0, Volume 3 - Core System Package [Host Volume], Part B - Service Discovery Protocol (SDP) Specification", June 2010, <http://www.bluetooth.org>

**Note** There is a charge to download the specification.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

### 1.2.2 Informative References

[BT40] Bluetooth Special Interest Group, "Bluetooth Specification Version 4.0" June 2010, <http://www.bluetooth.org>

**Note** There is a charge to download the specification.

[BT-GAP] Bluetooth Special Interest Group, "Bluetooth Specification Version 4.0, Volume 3 - Core System Package [Host Volume], Part C - Generic Access Profile", June 2010, <http://www.bluetooth.org>

**Note** There is a charge to download the specification.

[BT-SEC] Bluetooth Special Interest Group, "Bluetooth Specification Version 4.0, Volume 2 - Core System Package [BR/EDR Controller volume], Part H - Security Specification", June 2010, <http://www.bluetooth.org>

**Note** There is a charge to download the specification.

[FIPS180-4] FIPS PUBS, "Secure Hash Standards (SHS)", March 2012, <http://csrc.nist.gov/publications/fips/fips180-4/fips-180-4.pdf>

### 1.3 Overview

Bluetooth is one of the most common communication technologies that is used to enable scenarios that involve two different devices [\[BT40\]](#). For security purposes, it is necessary to ensure that the communication channel between the two devices is secure and authenticated. The process by which this is done in Bluetooth is known as **Bluetooth pairing** [\[BT-SEC\]](#).

There are many different ways to pair two devices that are using Bluetooth. The most secure pairing methods typically involve user input, such as numeric PIN comparison; however, a device might not be able to accept user input or a manufacturer can choose to skip this step. Skipping the user input step lowers the security of the connection and enables **man in the middle (MITM)** and other similar attacks. Traditional Bluetooth pairing also requires devices to be in a discoverable mode (see [\[BT-GAP\]](#)). In this mode, the server device advertises its presence.

The Automatic Bluetooth Pairing Protocol enables a **client** to establish a secure, authenticated Bluetooth connection with a server. The protocol does not require any user interaction at the time of pairing, nor does it require either device to be in discoverable mode. Prior to using the Automatic Bluetooth Pairing Protocol, the Bluetooth MAC address of the server device and a shared secret have to be exchanged between the two devices by using an OOB mechanism.


After the Bluetooth MAC address and shared secret information is available on both devices, the client sends a **PairingRequired** message (section [2.2.3.2](#)) to the server. This message is used to inform the server of the MAC address of the client.

The server has to be able to accept a **PairingRequired** message and when the message is received, send a **ReadyToPair** message (section [2.2.3.4](#)) in response. The server then readies itself to accept Bluetooth pairing from the client.

The client then initiates the Bluetooth pairing by using the Bluetooth Numeric Comparison Protocol [\[BT-SEC\]](#) during which the pairing parameters are negotiated between the client and server. The pairing parameters include a six digit confirmation value (PIN) and a link key.

To authenticate the client and server devices, both sides are required to have the same numeric value and the same shared secret. To accomplish the authentication, the server generates a 128-byte pseudo-random number and sends it to the client. The client then calculates the response as a hash of the challenge, the shared key, and the six digit confirmation value (the PIN that was previously negotiated between the client and the server) by using SHA-256 [\[FIPS180-4\]](#) and sends it to the server. The client and server then perform a similar **challenge/response authentication** process initiated by the client.

Each side accepts the pairing after it receives a satisfactory response to its challenge.

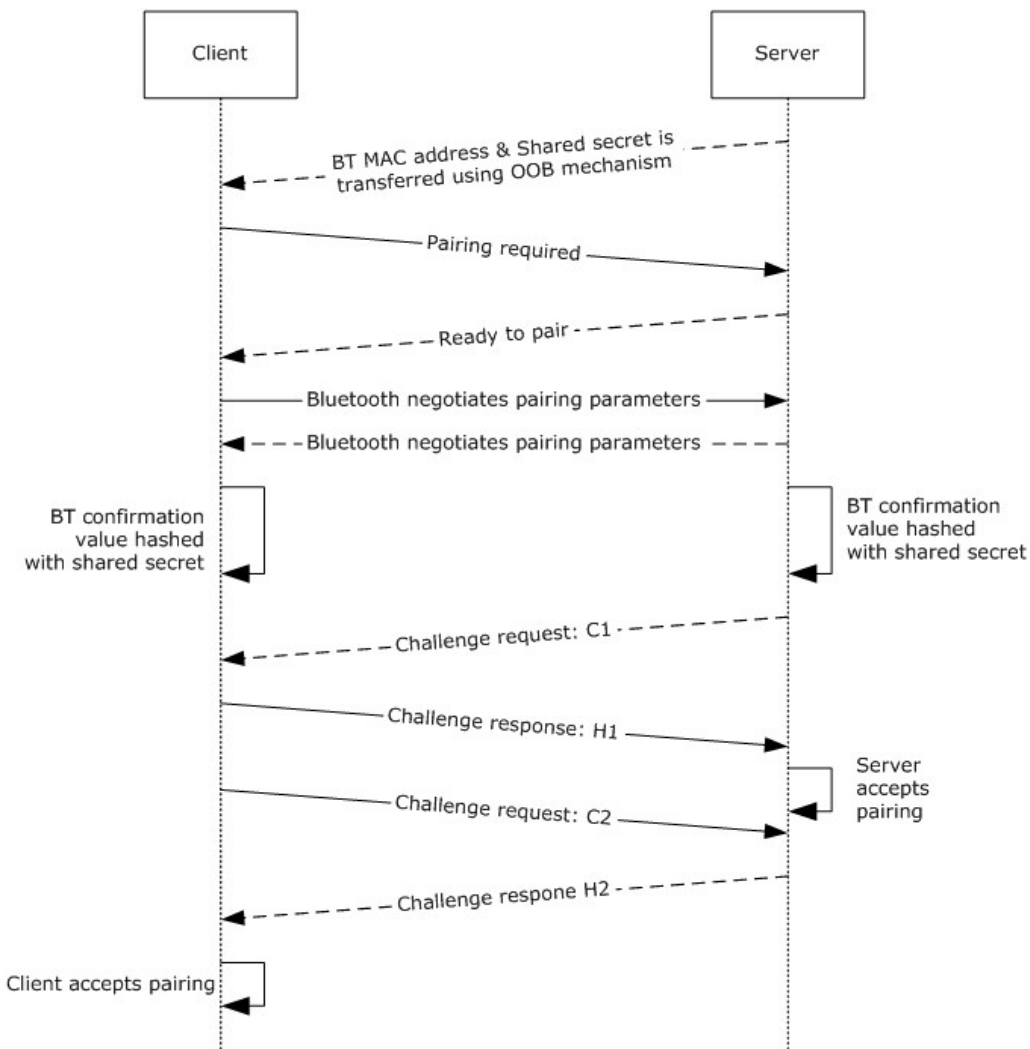

**Figure 1: Establishing a secure, authenticated Bluetooth connection**

## 1.4 Relationship to Other Protocols

The Automatic Bluetooth Pairing Protocol is dependent on the Bluetooth [\[BT40\]](#), RFCOMM [\[BT-RFCOMM\]](#), Service Discovery Protocol [\[BT-SDP\]](#), and Pairing protocols [\[BT-SEC\]](#).

## 1.5 Prerequisites/Preconditions

To use the Automatic Bluetooth Pairing Protocol, both devices are required to support Bluetooth, the Bluetooth radio on both devices has to be turned on, and the Bluetooth MAC address of the server device and a shared secret have to be exchanged between the two devices by using an OOB mechanism.

## 1.6 Applicability Statement

This protocol is applicable only when other Bluetooth pairing mechanisms are not appropriate or would prohibitively interrupt the user experience.



## 1.7 Versioning and Capability Negotiation

**Protocol Versions:** The Automatic Bluetooth Pairing Protocol does not support versioning, but it is extensible. This is defined in sections [3.1.5.4](#) and [3.2.5.4](#).

## 1.8 Vendor-Extensible Fields

None.

## 1.9 Standards Assignments

None.

## 2 Messages

### 2.1 Transport

The Automatic Bluetooth Pairing Protocol MUST have a byte stream connection between the client and server. This connection MUST be established by using RFCOMM [\[BT-RFCOMM\]](#). To identify an Automatic Bluetooth Pairing Protocol-capable server by using RFCOMM, the client MUST use the Bluetooth Service Discovery Protocol (SDP) [\[BT-SDP\]](#). Tethering-capable servers MUST be identified through SDP by using the **globally unique identifier (GUID)** {D9009112-CD2B-4e7a-A463-437D71E14905}. The RFCOMM communication channel is created before a Bluetooth pairing relationship with the server is created and MUST be unauthenticated.

### 2.2 Message Syntax

This protocol uses a common **type-length-value (TLV)** encoding schema for all messages.

#### 2.2.1 Enumerations

##### 2.2.1.1 MessageId Enumeration

The **MessageId** enumeration specifies the message type. The structure is referenced in the header of each message, as defined in section [2.2.2.1](#).


Field/Value	Description
ProtocolError 1	Identifies the <b>ProtocolError</b> message, as specified in section <a href="#">2.2.3.3</a> .
PairingRequired 2	Identifies the <b>PairingRequired</b> message, as specified in <a href="#">2.2.3.2</a> .
ReadyToPair 3	Identifies the <b>ReadyToPair</b> message, as specified in <a href="#">2.2.3.4</a> .
Challenge 4	Identifies the <b>Challenge</b> message, as specified in section <a href="#">2.2.3.1</a> .
Response 5	Identifies the <b>Response</b> message, as specified in section <a href="#">2.2.3.5</a> .

#### 2.2.2 Structures

All multi-byte values are in **network byte order** unless specified otherwise.

##### 2.2.2.1 CommonHeader Structure

The **CommonHeader** structure is used by all messages. It identifies the structure of the message and the encoded length of the message content.

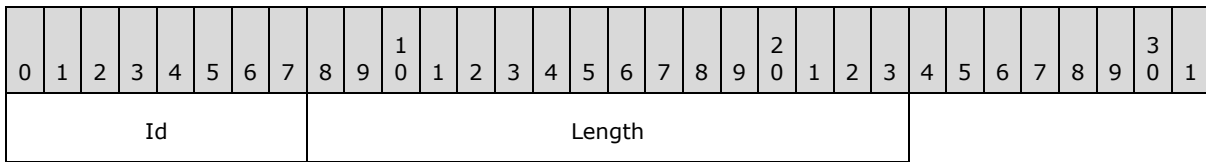


**Id (1 byte):** This field specifies the message type as indicated by the **MessageId** enumeration (section [2.2.1.1](#)).

**Length (2 bytes):** This field specifies the number of bytes following the message header.

## 2.2.3 Messages

### 2.2.3.1 Challenge Message

The **Challenge** message is sent by each device to the peer device to authenticate pairing.

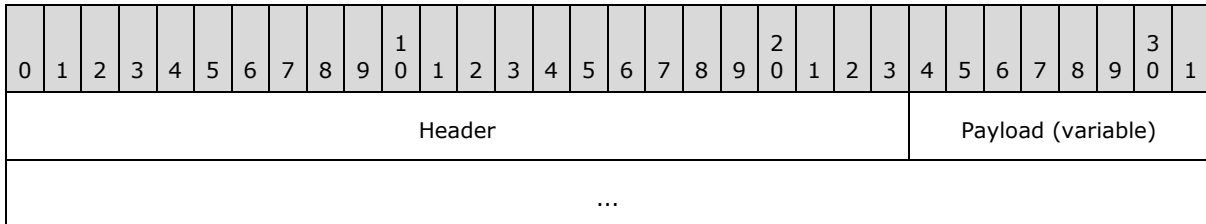


**Header (3 bytes):** This field contains the **CommonHeader** structure (section [2.2.2.1](#)). The **Id** field (**Header.Id**) of the header is set to **MessageId.Challenge** (4). The **Length** (**Header.Length**) of the header is set to the payload size of the message.

**Payload (variable):** This field contains the **challenge value** (128 bytes). Future protocol versions MAY define additional payload elements. This protocol version MUST ignore any payload after the challenge value in the packet.

### 2.2.3.2 PairingRequired Message

The **PairingRequired** message is sent by the client to the server to prepare the pairing.

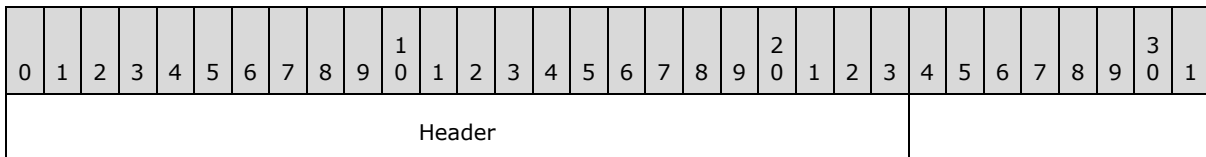


**Header (3 bytes):** This field contains the **CommonHeader** structure (section [2.2.2.1](#)). The **Id** field (**Header.Id**) is set to **MessageId.PairingRequired** (2). The **Length** field (**Header.Length**) is set to the payload size of the message. In this version of the protocol, the payload is empty (0 bytes). Future protocol versions MAY define additional message elements. This protocol version MUST ignore any payload.

### 2.2.3.3 ProtocolErrorResponse Message

The **ProtocolErrorResponse** message is sent by the receiver in response to a message that is not recognized. This message provides basic compatibility with future protocol versions that MAY contain additional messages. An implementation of this protocol version sends this message in response to

receiving a message where the value of the **MessageId** is outside of the range defined in section [2.2.1.1](#).

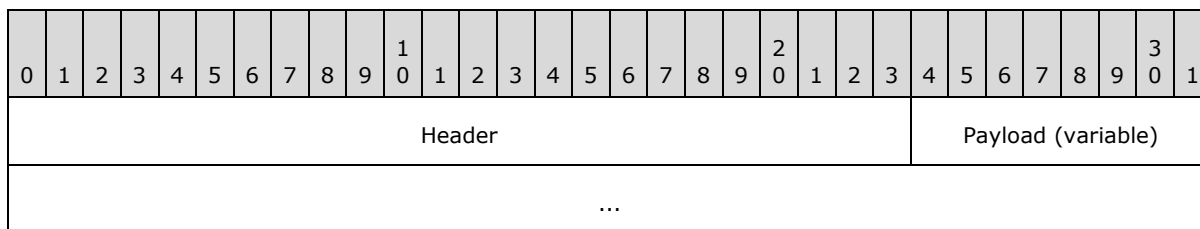


**Header (3 bytes):** This field contains the **CommonHeader** structure (section [2.2.2.1](#)). The **Id** field (**Header.Id**) is set to **MessageId.ProtocolError** (1). The **Length** field (**Header.Length**) is set to the payload size of the message. The payload consists of the **MessageId** (section [2.2.1.1](#)) of the message that was not recognized by the receiver.

**Payload (variable):** This field contains the **MessageId** (1 byte). Future protocol versions MAY define additional message elements. This protocol version MUST ignore any payload after the **MessageId**.

### 2.2.3.4 ReadyToPair Message


The **ReadyToPair** message is sent by the server to the client in response to the **PairingRequired** message (section [2.2.3.2](#)).

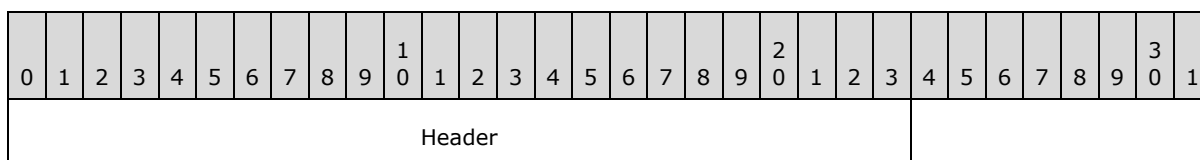

**Header (3 bytes):** This field contains the **CommonHeader** structure (section [2.2.2.1](#)). The **Id** field (**Header.Id**) is set to **MessageId.ReadyToPair** (3). The **Length** field (**Header.Length**) is set to the payload size of the message. In this version of the protocol, the payload is empty (0 bytes). Future protocol versions MAY define additional message elements. This protocol version MUST ignore any payload.

### 2.2.3.5 Response Message

The **Response** message is sent in response to a **Challenge** message (section [2.2.3.1](#)) to authenticate the pairing.

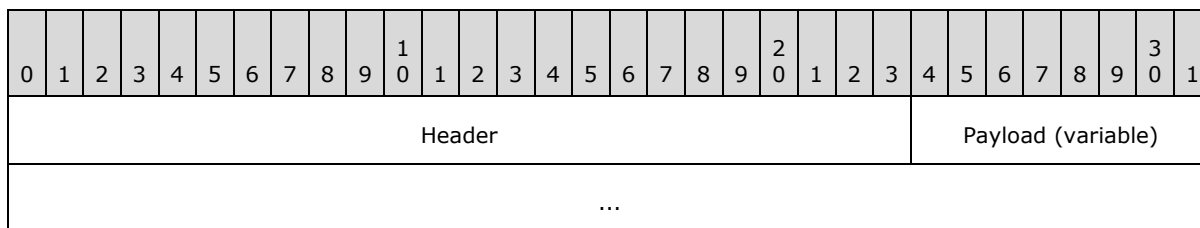

**Header (3 bytes):** This field contains the **CommonHeader** structure (section [2.2.2.1](#)). The **Id** field (**Header.Id**) is set to **MessageId.Response** (5). The **Length** field (**Header.Length**) is set to the payload size of the message.

**Payload (variable):** This field contains the **response value** (32 bytes). Future protocol versions MAY define additional message elements. This protocol version MUST ignore any payload after the response value in the packet.

## 3 Protocol Details


The Automatic Bluetooth Pairing Protocol provides a client role and a server role.

The client and server use the same algorithm to compute a response value for challenge/response authentication. Given a 128-byte challenge value, a 128-byte shared secret, and a numeric value (representing a six-digit numeric code), the response value is calculated as a SHA-256 of the concatenation of the challenge value, the shared secret, and the numeric value represented (PIN) as a 32-byte value in network byte order.

### 3.1 Client Details

The role of the client in the Bluetooth pairing process is as follows:

1. The client establishes an unauthenticated RFCOMM connection with the server to execute the Automatic Bluetooth Pairing Protocol.
2. The client executes a state machine to initiate and authenticate the Bluetooth pairing.
3. The client sends a **PairingRequired** message (section [2.2.3.2](#)) to the server and waits for the server to respond.
4. After receiving a **ReadyToPair** message (section [2.2.3.4](#)) from the server, the client initiates the Bluetooth pairing with a numeric comparison procedure. The client then waits for the server to initiate challenge/response authentication.
5. After receiving the **Challenge** message (section [2.2.3.1](#)) from the server, the client computes the corresponding response value and returns the value to the server by sending a **Response** message (section [2.2.3.5](#)).
6. The client authenticates the server by generating a random challenge and sending it to the server by using a **Challenge** message (section [2.2.3.1](#)).
7. The client waits for the server to return a **Response** message (section [2.2.3.5](#)).
8. After receiving the **Response** message, the client validates the response value. If the validation succeeds, the client completes the pairing with the server. If the validation fails, the client aborts the pairing with the server.

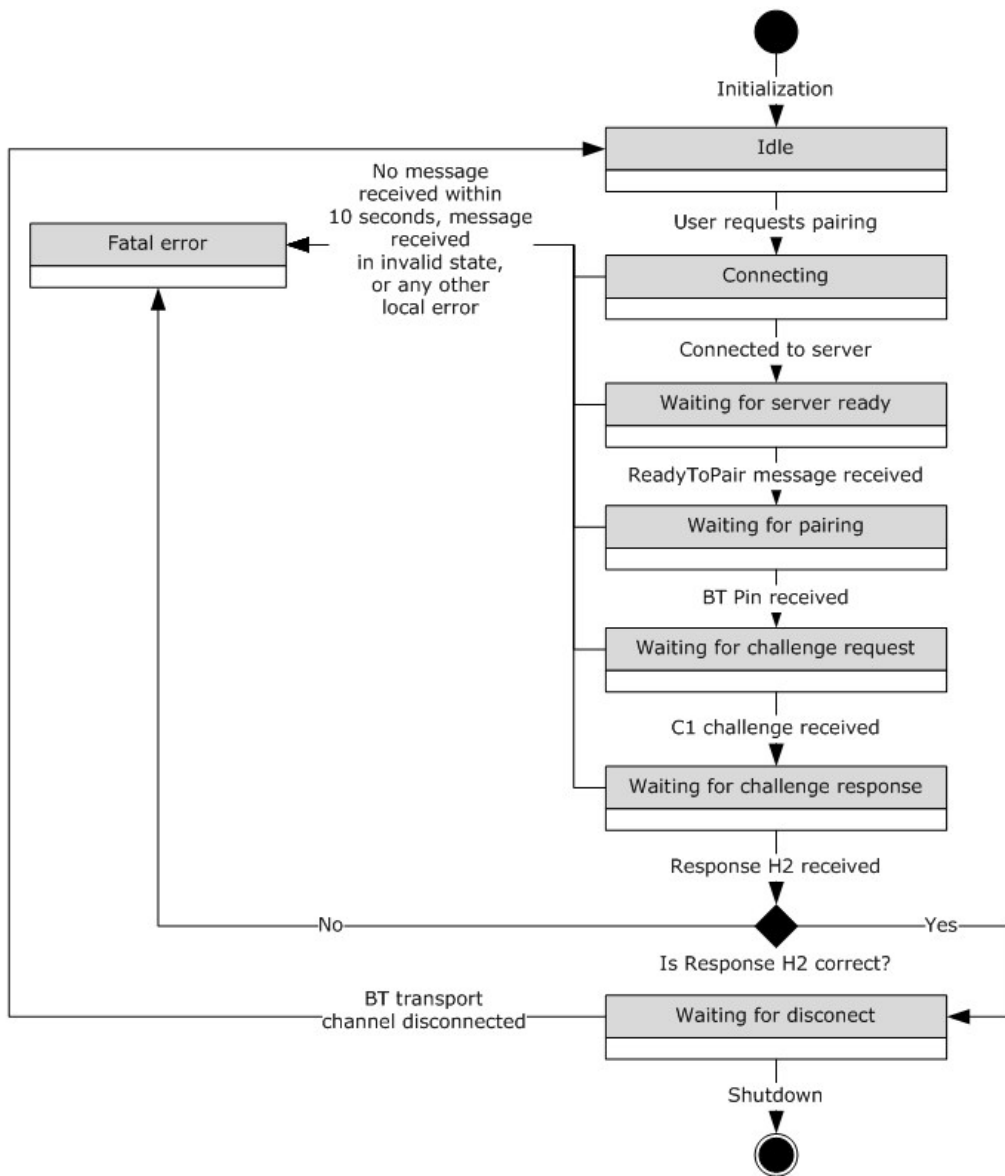

**Figure 2: Client state diagram**

### 3.1.1 Abstract Data Model

This section describes a conceptual model of possible data organization that an implementation maintains to participate in this protocol. The described organization is provided to facilitate the explanation of how the protocol behaves. This document does not mandate that implementations adhere to this model as long as their external behavior is consistent with that described in this document.

**State:** Specifies the state of the client which can be one of the following: IDLE, CONNECTING, WAITING\_FOR\_SERVER\_READY, WAITING\_FOR\_PAIRING, WAITING\_FOR\_CHALLENGE\_REQUEST, WAITING\_FOR\_CHALLENGE\_RESPONSE, WAITING\_FOR\_DISCONNECT, or FATAL\_ERROR.

**Server Address:** The Bluetooth address of the server.

**Shared Secret:** A 128-byte **binary large object (BLOB)** that contains the shared secret.

**Expected Response:** A 32-byte **BLOB** that contains the expected response value.

**Numeric Value:** A six-digit confirmation value (PIN).

### 3.1.2 Timers

The client role maintains the following timers.

**ClientGuardTimer:** The time-out interval is set to 10 seconds.

### 3.1.3 Initialization

The initial state for the client is IDLE. The **ClientGuardTimer** (section [3.1.2](#)) is not set.

### 3.1.4 Higher-Layer Triggered Events

#### 3.1.4.1 Pairing Request

The higher layer can initiate pairing when the client is in the IDLE state (see section [3.1.1](#)). When the client is in any other state, the client **MUST** fail the request. The higher layer **MUST** provide the **Server Address** and the **Shared Secret** that is common to the client and server. The client stores the **Server Address** and the **Shared Secret**, initiates a Bluetooth connection to the specified server, sets the **ClientGuardTimer** (section [3.1.2](#)), and transitions to the CONNECTING state.

#### 3.1.4.2 Cancellation

The higher layer can cancel the pairing attempt at any time. When the client is in the CONNECTING, WAITING\_FOR\_SERVER\_READY, WAITING\_FOR\_PAIRING, WAITING\_FOR\_CHALLENGE\_REQUEST, or WAITING\_FOR\_CHALLENGE\_RESPONSE state, the client initiates a disconnect of the control channel, stops the **ClientGuardTimer** (section [3.1.2](#)), and transitions to the FATAL\_ERROR state. When the client is in any other state, the client **MUST** ignore the request.

### 3.1.5 Message Processing Events and Sequencing Rules

The message type is identified by using the **MessageId** value stored in the message header, as specified in section [2.2.1.1](#). A message is processed only when it has been fully received as indicated by the value of the **Length** field specified within the message header. When the client is in the FATAL\_ERROR or WAITING\_FOR\_DISCONNECT state, the client **MUST** ignore any messages received. When the client receives a message in any other state, the **ClientGuardTimer** (section [3.1.2](#)) **MUST** be started or restarted.

#### 3.1.5.1 ReadyToPair

When the client receives a **ReadyToPair** message (section [2.2.3.2](#)) in the WAITING\_FOR\_SERVER\_READY state, the client **MUST** initiate Bluetooth pairing with the server (as specified by the **Server Address**) using the numeric comparison method. The client **MUST** restart the **ClientGuardTimer** (section [3.1.2](#)) and transition to the WAITING\_FOR\_PAIRING state.

When the client receives the **ReadyToPair** message in any other state, the client **MUST** initiate a disconnect of the control channel, stop the **ClientGuardTimer**, and transition to the FATAL\_ERROR state.



### 3.1.5.2 Challenge

When the client receives a **Challenge** message (section [2.2.3.1](#)) in the WAITING\_FOR\_CHALLENGE\_REQUEST state, the client MUST compute the response value (as specified in section [3.2.1](#)) using the challenge value of the Challenge message (section [2.2.3.1](#)), the **Shared Secret**, and the **Numeric Value**. The client MUST send a **Response** message (section [2.2.3.5](#)) to the server containing the computed response value.

The client MUST then create a random challenge value and send a **Challenge** message to the server containing the challenge value. The client MUST compute and store the **Expected Response** (as specified in section [3.2.1](#)) for this challenge value. The client MUST restart the **ClientGuardTimer** (section [3.1.2](#)) and transition to the WAITING\_FOR\_CHALLENGE\_RESPONSE state.

When the client receives the client message in any other state, the client MUST initiate a disconnect of the control channel, stop the **ClientGuardTimer**, and transition to the FATAL\_ERROR state.

### 3.1.5.3 Response

When the client receives a **Response** message (section [2.2.3.5](#)) in the WAITING\_FOR\_CHALLENGE\_RESPONSE state, the client MUST stop the **ClientGuardTimer** (section [3.1.2](#)). The client MUST compare the response value of the **Response** message with the **Expected Response**. If the values match, the client MUST complete the pairing with the server and transition to the WAITING\_FOR\_DISCONNECT state. If the values do not match, the client MUST transition to the FATAL\_ERROR state. In all cases, the client MUST initiate the disconnect of the control channel.

### 3.1.5.4 Other Messages

When the client receives a message with an unknown message type, that is, a **MessageId** value that is not specified in section [2.2.1.1](#), the client MUST send a **ProtocolErrorResponse** message (section [2.2.3.3](#)) indicating the unknown message type and specifying the unrecognized **MessageId** value in the message payload.

After the client receives a message that cannot be parsed according to the message syntax specified in section [2.2](#), the client initiates a disconnect of the control channel, stops the **ClientGuardTimer** (section [3.1.2](#)), and transitions to the FATAL\_ERROR state.

## 3.1.6 Timer Events

### 3.1.6.1 ClientGuardTimer

Upon expiration of the **ClientGuardTimer** (section [3.1.2](#)), the client initiates a disconnect of the control channel and transitions to the FATAL\_ERROR state.

## 3.1.7 Other Local Events

### 3.1.7.1 Successful Connection of Control Channel

Upon successful connection of the control channel to the server, the client MUST send a **PairingRequired** message (section [2.2.3.2](#)) to the server, restart the **ClientGuardTimer** (section [3.1.2](#)), and transition to the WAITING\_FOR\_SERVER\_READY state.

### 3.1.7.2 Failed Connection of Control Channel

Upon a failed connection of the control channel to the server, the client MUST stop the **ClientGuardTimer** (section [3.1.2](#)), indicate the failed pairing attempt to the higher layer, and transition to the IDLE state.

### 3.1.7.3 Disconnect Event of Control Channel

Upon receiving a disconnect event of the control channel while in the WAITING\_FOR\_DISCONNECT state, the client indicates the successful pairing with the server to the higher layer and transitions to the IDLE state.

When the client receives a disconnect event of the control channel while in any other state, the client stops the **ClientGuardTimer** (section [3.1.2](#)) if it is running, indicates the failed pairing with the server to the higher layer, and transitions to the IDLE state.

### 3.1.7.4 Pairing Indication


When the Bluetooth layer indicates to the client that a pairing attempt has to be authenticated, the client compares its state to the WAITING\_FOR\_PAIRING state, compares the indicated peer address with the **Server Address**, and compares the indicated authentication method to the numeric comparison. If all values match, the client MUST store the indicated **Numeric Value** and transition to the WAITING\_FOR\_CHALLENGE\_REQUEST state; otherwise, the client MUST ignore the indication from the Bluetooth layer.

## 3.2 Server Details

The role of the server in the Bluetooth pairing process is as follows:

1. The server creates an RFCOMM port and waits for clients to connect by using an unauthenticated RFCOMM connection to execute the Automatic Bluetooth Pairing Protocol.
2. The server executes a strict state machine to authenticate the Bluetooth pairing.
3. When a client has connected, the server waits for the client to send a **PairingRequired** message (section [2.2.3.2](#)). When this message is received, the server responds by sending a **ReadyToPair** message (section [2.2.3.4](#)) to the client and waits for the client to initiate the Bluetooth pairing with a numeric comparison procedure.
4. After the pairing has been initiated and the numeric value to authenticate the pairing is available, the server initiates challenge/response authentication by generating a random challenge value and sending it to the client by using a **Challenge** message (section [2.2.3.1](#)). The server then waits for the client to return a **Response** message (section [2.2.3.5](#)).
5. After receiving the **Response** message, the server validates the response value. If the validation succeeds, the server completes the pairing with the client.
6. The server waits for the client to perform challenge/response authentication by the client sending a **Challenge** message to the server. Upon receiving the **Challenge** message from the client, the server computes the corresponding response value and returns the value to the client by sending a **Response** message.
7. The server then waits for the client to disconnect.

The server MAY handle multiple clients simultaneously by having an instance of the server role for each connected client.

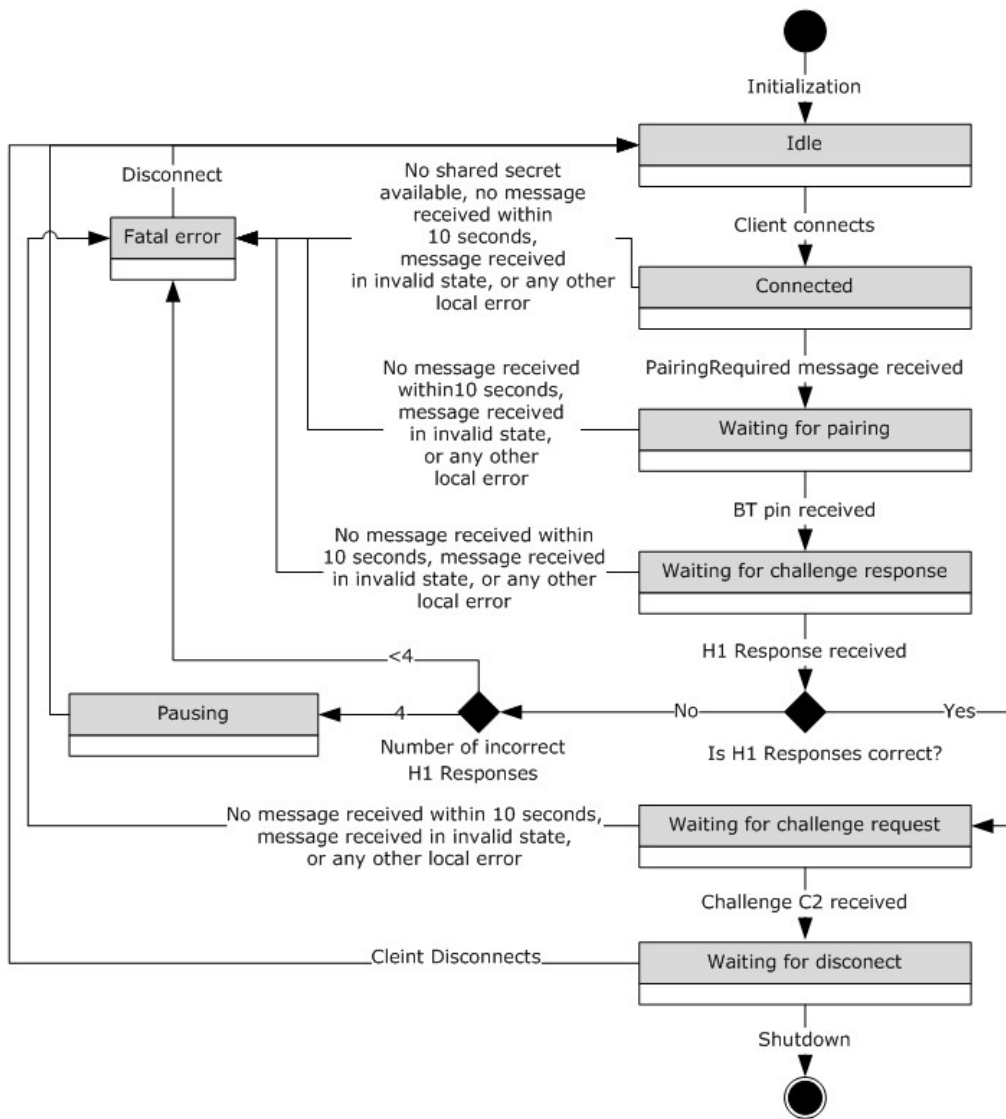

**Figure 3: Server state diagram**

### 3.2.1 Abstract Data Model

This section describes a conceptual model of possible data organization that an implementation maintains to participate in this protocol. The described organization is provided to facilitate the explanation of how the protocol behaves. This document does not mandate that implementations adhere to this model as long as their external behavior is consistent with that described in this document.

**State:** Specifies the server state which can be one of the following: IDLE, CONNECTED, WAITING\_FOR\_PAIRING, WAITING\_FOR\_CHALLENGE\_RESPONSE, WAITING\_FOR\_CHALLENGE\_REQUEST, WAITING\_FOR\_DISCONNECT, FATAL\_ERROR, and PAUSING.

**Client Address:** The Bluetooth address of the connected client.

**Shared Secret:** A 128 byte BLOB that contains the shared secret.

**Expected Response:** A 32 byte BLOB that contains the expected response value.

**Numeric Value:** A six-digit confirmation value (PIN).

**Consecutive Failure Count:** An integer value representing the number of consecutive pairing attempts that have failed.

### 3.2.2 Timers

The server role maintains the following timers.

**GuardTimer:** The time-out interval is set to 10 seconds.

**PausingTimer:** The time-out interval is set to one hour.

### 3.2.3 Initialization

The initial **state** for the server is IDLE.

The **Shared Secret** (section [3.2.1](#)) is set to a value chosen by the higher layer.

The **GuardTimer** and **PausingTimer** are not set (see section [3.2.2](#)).

### 3.2.4 Higher-Layer Triggered Events

#### 3.2.4.1 Shutdown

The higher layer can shut down the server at any time. The server disconnects the control channel at shutdown.

### 3.2.5 Message Processing Events and Sequencing Rules

The message type is identified by using the **MessageId** value stored in the message header, as specified in section [2.2.1.1](#). A message is processed only when it has been fully received, as indicated by the value of the **Length** field specified within the message header. When the server is in the FATAL\_ERROR, PAUSING, or WAITING\_FOR\_DISCONNECT state, the server MUST ignore any received messages. When the server receives a message in any other state, the **GuardTimer** (section [3.2.2](#)) MUST be started or restarted.

#### 3.2.5.1 PairingRequired

When the server receives a **PairingRequired** message (section [2.2.3.2](#)) in the CONNECTED state, the server MUST send a **ReadyToPair** message (section [2.2.3.4](#)) to the client, restart the **GuardTimer** (section [3.2.2](#)), and transition to the WAITING\_FOR\_PAIRING state.

When the server receives the **PairingRequired** message in any other state, the server MUST initiate a disconnect of the control channel, stop the **GuardTimer**, and transition to the FATAL\_ERROR state.

#### 3.2.5.2 Response

When the server receives a **Response** message (section [2.2.3.5](#)) in the WAITING\_FOR\_CHALLENGE\_RESPONSE state, the server MUST compare the response value of the **Response** message with the **Expected Response** (section [3.2.1](#)).

If the values match, the server MUST complete the pairing with the client, set the **Consecutive Failure Count** (section [3.2.1](#)) to 0, and transition to the WAITING\_FOR\_CHALLENGE\_REQUEST state. If the values do not match, the server MUST initiate a disconnect of the control channel, increment the value of the **Consecutive Failure Count** (section [3.2.1](#)), and stop the **GuardTimer** (section [3.2.2](#)).

If the value of **Consecutive Failure Count** is less than 4, the server MUST transition to the FATAL\_ERROR state; otherwise, the server MUST transition to the PAUSING state.

When the server receives a **Response** message in any other state, the server MUST initiate a disconnect of the control channel, stop the **GuardTimer**, and transition to the FATAL\_ERROR state.

### 3.2.5.3 Challenge

When the server receives a **Challenge** message (section [2.2.3.1](#)) in the WAITING\_FOR\_CHALLENGE\_REQUEST state, the server MUST compute the response value (as described in section [3.2.1](#)) using the challenge value of the **Challenge** message, the **Shared Secret** (section [3.2.1](#)), and the **Numeric Value** (section [3.2.1](#)). The server MUST send a **Response** message (section [2.2.3.5](#)) to the client containing the computed response value. The server MUST restart the **GuardTimer** (section [3.2.2](#)) and transition to the WAITING\_FOR\_DISCONNECT state.

When the server receives a **Challenge** message in any other state, the server MUST initiate a disconnect of the control channel, stop the **GuardTimer**, and transition to the FATAL\_ERROR state.

### 3.2.5.4 Other Messages

When the server receives a message with an unknown message type, that is, a value for the **MessageId** that is not specified in section [2.2.1.1](#), the server MUST send a **ProtocolErrorResponse** message (section [2.2.3.3](#)) indicating the unknown message type and specifying the unrecognized **MessageId** value in the message payload.

When the server receives a message that cannot be parsed according to the message syntax specified in section [2.2](#), the server initiates a disconnect of the control channel, stops the **GuardTimer** (section [3.2.2](#)), and transitions to the FATAL\_ERROR state.

## 3.2.6 Timer Events

### 3.2.6.1 GuardTimer

Upon expiration of the **GuardTimer** (section [3.2.2](#)), the server initiates a disconnect of the control channel and transitions to the FATAL\_ERROR state.

### 3.2.6.2 PausingTimer

Upon expiration of the **PausingTimer** (section [3.2.2](#)), the server sets the **Consecutive Failure Count** (section [3.2.1](#)) to 0 and transitions to the IDLE state.

## 3.2.7 Other Local Events

### 3.2.7.1 Connect Event

The server can only process connect events from clients when the server is in the IDLE state. When a client connects, the server MUST transition to the CONNECTED state, store the **Client Address** (section [3.2.1](#)), and start the **GuardTimer** (section [3.2.2](#)).

### 3.2.7.2 Disconnect Event

When the server receives a disconnect event of the control channel, the server stops the **GuardTimer** (section [3.2.2](#)) if it is running. If the **Consecutive Failure Count** (section [3.2.1](#)) equals 4, the server MUST transition to the PAUSING state and start the **PausingTimer** (section [3.2.2](#)); otherwise, the server transitions to the IDLE state.

### 3.2.7.3 Pairing indication

When the Bluetooth layer indicates that a pairing attempt has to be authenticated, the server compares its state to the WAITING\_FOR\_PAIRING state, compares the indicated peer address with the **Client Address** (section [3.2.1](#)), and compares the indicated authentication method to the numeric comparison value. If all values match, the server MUST store the indicated **Numeric Value** (section [3.2.1](#)). The server MUST then create a random challenge value and send a **Challenge** message (section [2.2.3.1](#)) to the client containing the challenge value. The server MUST compute and store the **Expected Response** (section [3.2.1](#)) for this challenge value using the challenge value, the **Shared Secret** (section [3.2.1](#)), and the **Numeric Value**. The server MUST restart the **GuardTimer** (section [3.2.2](#)) and transition to the WAITING\_FOR\_CHALLENGE\_RESPONSE state.

If some of the value does not match, the server MUST ignore the indication from the Bluetooth layer.

## 4 Protocol Examples

The following examples show the sequence of a successful Bluetooth pairing by using the Automatic Bluetooth Pairing Protocol. This sequence is demonstrated in the figure shown in section [1.3](#).

### 4.1 PairingRequired

```
Message Header: 0x02 0x00 0x00 (Type == PairingRequired, Length == 0)
```

### 4.2 ReadyToPair

```
Message Header: 0x03 0x00 0x00 (Type == ReadyToPair, Length == 0)
```

### 4.3 Challenge

```
Message Header: 0x04 0x00 0x80 (Type == Challenge, Length == 128)
Payload: Challenge value: 0x01 0x02 0x03 0x04 ... 0x80
```

### 4.4 Response

```
Message Header: 0x05 0x00 0x20 (Type == Response, Length == 32)
Payload: Response value: 0x01 0x02 0x03 0x04 ... 0x20
```

## 5 Security

### 5.1 Security Considerations for Implementers

Implementers are required to ensure that the OOB exchange of the shared secret is performed in a secure and authenticated manner.

### 5.2 Index of Security Parameters

Security parameter	Section
Computation of the response value	<a href="#">3</a>
Shared secret on the client	<a href="#">3.1.1</a>
Shared secret on the server	<a href="#">3.2.1</a>



## 6 Appendix A: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs:

- Windows 8.1 operating system

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

## 7 Change Tracking

This section identifies changes that were made to the [MS-ABTP] protocol document between the August 2013 and November 2013 releases. Changes are classified as New, Major, Minor, Editorial, or No change.

The revision class **New** means that a new document is being released.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements or functionality.
- An extensive rewrite, addition, or deletion of major portions of content.
- The removal of a document from the documentation set.
- Changes made for template compliance.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **Editorial** means that the language and formatting in the technical content was changed. Editorial changes apply to grammatical, formatting, and style issues.

The revision class **No change** means that no new technical or language changes were introduced. The technical content of the document is identical to the last released version, but minor editorial and formatting changes, as well as updates to the header and footer information, and to the revision summary, may have been made.

Major and minor changes can be described further using the following change types:

- New content added.
- Content updated.
- Content removed.
- New product behavior note added.
- Product behavior note updated.
- Product behavior note removed.
- New protocol syntax added.
- Protocol syntax updated.
- Protocol syntax removed.
- New content added due to protocol revision.
- Content updated due to protocol revision.
- Content removed due to protocol revision.
- New protocol syntax added due to protocol revision.

- Protocol syntax updated due to protocol revision.
- Protocol syntax removed due to protocol revision.
- New content added for template compliance.
- Content updated for template compliance.
- Content removed for template compliance.
- Obsolete document removed.

Editorial changes are always classified with the change type **Editorially updated**.

Some important terms used in the change type descriptions are defined as follows:

- **Protocol syntax** refers to data elements (such as packets, structures, enumerations, and methods) as well as interfaces.
- **Protocol revision** refers to changes made to a protocol that affect the bits that are sent over the wire.

The changes made to this document are listed in the following table. For more information, please contact [protocol@microsoft.com](mailto:protocol@microsoft.com).

Section	Tracking number (if applicable) and description	Major change (Y or N)	Change type
<a href="#">1.3 Overview</a>	69499 Revised the references to [BT40], [BT-SEC], and [FIPS180-4] from normative to informative.	Y	Content updated.
<a href="#">1.4 Relationship to Other Protocols</a>	69499 Revised the references to [BT40] and [BT-SEC] from normative to informative.	Y	Content updated.
<a href="#">3.1 Client Details</a>	69494 Revised the figure to indicate that the Connecting state results in a fatal error based on the specified message conditions.	N	Content updated.
<a href="#">3.1.5.3 Response</a>	69500 Clarified that in all cases, the client initiates the disconnect of the control channel.	N	Content updated.
<a href="#">3.2 Server Details</a>	69496 Revised the figure to indicate that less than four incorrect H1 Responses results in a fatal error condition.	Y	Content updated.
<a href="#">3.2.5 Message Processing Events and Sequencing Rules</a>	69495 Clarified that the server ignores received messages when in the FATAL_ERROR, PAUSING, or WAITING_FOR_DISCONNECT state.	N	Content updated.
<a href="#">3.2.5.2 Response</a>	69496 Clarified that when Consecutive Failure Count is less than 4, the server transitions to the FATAL_ERROR state;	Y	Content updated.

<b>Section</b>	<b>Tracking number (if applicable) and description</b>	<b>Major change (Y or N)</b>	<b>Change type</b>
	otherwise, it transitions to the PAUSING state.		

## 8 Index

### A

Abstract data model  
[client](#) 15  
[server](#) 19  
[Applicability](#) 8

### C

[Capability negotiation](#) 9  
[Change tracking](#) 26  
Client  
[abstract data model](#) 15  
[initialization](#) 16  
[message processing](#) 16  
[overview](#) 14  
[sequencing rules](#) 16  
[timers](#) 16

### D

Data model - abstract  
[client](#) 15  
[server](#) 19

### F

[Fields - vendor-extensible](#) 9

### G

[Glossary](#) 5

### I

[Implementer - security considerations](#) 24  
[Index of security parameters](#) 24  
[Informative references](#) 6  
Initialization  
[client](#) 16  
[server](#) 20  
[Introduction](#) 5

### M

Message processing  
[client](#) 16  
[server](#) 20  
Messages  
[Structures message](#) 10  
[transport](#) 10

### N

[Normative references](#) 6

### O

[Overview \(synopsis\)](#) 7

### P

[Parameters - security index](#) 24  
[Preconditions](#) 8  
[Prerequisites](#) 8  
[Product behavior](#) 25

### R

References  
[informative](#) 6  
[normative](#) 6  
[Relationship to other protocols](#) 8

### S

Security  
[implementer considerations](#) 24  
[parameter index](#) 24  
Sequencing rules  
[client](#) 16  
[server](#) 20  
Server  
[abstract data model](#) 19  
[initialization](#) 20  
[message processing](#) 20  
[overview](#) 18  
[sequencing rules](#) 20  
[timers](#) 20  
[Standards assignments](#) 9  
[Structures message](#) 10

### T

Timers  
[client](#) 16  
[server](#) 20  
[Tracking changes](#) 26  
[Transport](#) 10

### V

[Vendor-extensible fields](#) 9  
[Versioning](#) 9