

## [MS-ERREF-Diff]:

# Windows Error Codes

---

### Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation (~~“this documentation”~~) for protocols, file formats, ~~data portability, computer~~ languages, and standards ~~as well as overviews of the interaction among each of these technologies~~ support. ~~Additionally, overview documents cover inter-protocol relationships and interactions.~~
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you ~~may~~can make copies of it in order to develop implementations of the technologies ~~that are~~ described in ~~the Open Specifications~~ ~~this documentation~~ and ~~may~~can distribute portions of it in your implementations ~~using~~that use these technologies or ~~in~~ your documentation as necessary to properly document the implementation. You ~~may~~can also distribute in your implementation, with or without modification, any ~~schema, IDL's~~schemas, IDLs, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications-~~documentation~~.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that ~~may~~might cover your implementations of the technologies described in the Open Specifications-~~documentation~~. Neither this notice nor Microsoft's delivery of ~~the~~this documentation grants any licenses under those ~~patents~~ or any other Microsoft patents. However, a given Open ~~Specification~~ ~~may~~Specifications document ~~might~~ be covered by ~~the~~ Microsoft [Open Specifications Promise](#) or the [Microsoft Community Promise](#). If you would prefer a written license, or if the technologies described in ~~the Open Specifications~~~~this documentation~~ are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting [iplg@microsoft.com](mailto:iplg@microsoft.com).
- **Trademarks.** The names of companies and products contained in this documentation ~~may~~might be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights. For a list of Microsoft trademarks, visit [www.microsoft.com/trademarks](http://www.microsoft.com/trademarks).
- **Fictitious Names.** The example companies, organizations, products, domain names, ~~e-mail~~email addresses, logos, people, places, and events ~~that are~~ depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

**Reservation of Rights.** All other rights are reserved, and this notice does not grant any rights other than ~~as~~ specifically described above, whether by implication, estoppel, or otherwise.

**Tools.** The Open Specifications ~~documentation~~ ~~does~~ not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments, you are free to take advantage of them. Certain Open Specifications ~~documents~~ are intended for use in conjunction with publicly available ~~standard~~standards specifications and network programming art; and ~~assumes, as such, assume~~ that the reader either is familiar with the aforementioned material or has immediate access to it.

## Revision Summary

Date	Revision History	Revision Class	Comments
2/14/2008	5.0.3	Editorial	Changed language and formatting in the technical content.
3/14/2008	5.1	Minor	Clarified the meaning of the technical content.
5/16/2008	5.1.1	Editorial	Changed language and formatting in the technical content.
6/20/2008	5.2	Minor	Clarified the meaning of the technical content.
7/25/2008	5.2.1	Editorial	Changed language and formatting in the technical content.
8/29/2008	5.2.2	Editorial	Changed language and formatting in the technical content.
10/24/2008	5.2.3	Editorial	Changed language and formatting in the technical content.
12/5/2008	5.3	Minor	Clarified the meaning of the technical content.
1/16/2009	5.3.1	Editorial	Editorial Update.
2/27/2009	5.3.2	Editorial	Changed language and formatting in the technical content.
4/10/2009	6.0	Major	Updated and revised the technical content.
5/22/2009	7.0	Major	Updated and revised the technical content.
7/2/2009	7.1	Minor	Clarified the meaning of the technical content.
8/14/2009	8.0	Major	Updated and revised the technical content.
9/25/2009	8.1	Minor	Clarified the meaning of the technical content.
11/6/2009	8.2	Minor	Clarified the meaning of the technical content.
12/18/2009	9.0	Major	Updated and revised the technical content.
1/29/2010	9.0.1	Editorial	Changed language and formatting in the technical content.
3/12/2010	9.0.2	Editorial	Changed language and formatting in the technical content.
4/23/2010	9.0.3	Editorial	Changed language and formatting in the technical content.
6/4/2010	9.0.4	Editorial	Changed language and formatting in the technical content.
7/16/2010	9.0.4	None	No changes to the meaning, language, or formatting of the technical content.
8/27/2010	9.0.4	None	No changes to the meaning, language, or formatting of the technical content.
10/8/2010	9.0.4	None	No changes to the meaning, language, or formatting of the technical content.
11/19/2010	10.0	Major	Updated and revised the technical content.
1/7/2011	11.0	Major	Updated and revised the technical content.
2/11/2011	11.0	None	No changes to the meaning, language, or formatting of the technical content.
3/25/2011	12.0	Major	Updated and revised the technical content.

<b>Date</b>	<b>Revision History</b>	<b>Revision Class</b>	<b>Comments</b>
5/6/2011	12.0	None	No changes to the meaning, language, or formatting of the technical content.
6/17/2011	12.1	Minor	Clarified the meaning of the technical content.
9/23/2011	12.2	Minor	Clarified the meaning of the technical content.
12/16/2011	13.0	Major	Updated and revised the technical content.
3/30/2012	13.1	Minor	Clarified the meaning of the technical content.
7/12/2012	13.1	None	No changes to the meaning, language, or formatting of the technical content.
10/25/2012	13.1	None	No changes to the meaning, language, or formatting of the technical content.
1/31/2013	13.1	None	No changes to the meaning, language, or formatting of the technical content.
8/8/2013	14.0	Major	Updated and revised the technical content.
11/14/2013	14.1	Minor	Clarified the meaning of the technical content.
2/13/2014	14.2	Minor	Clarified the meaning of the technical content.
5/15/2014	14.2	None	No changes to the meaning, language, or formatting of the technical content.
6/30/2015	15.0	Major	Significantly changed the technical content.
10/16/2015	15.0	<del>No</del> ChangeNone	No changes to the meaning, language, or formatting of the technical content.

# Table of Contents

<b>1</b>	<b>Introduction</b>	<b>5</b>
1.1	Glossary	5
1.2	References	5
1.2.1	Normative References	5
1.2.2	Informative References	6
1.3	Overview	6
1.4	Relationship to Protocols and Other Structures	6
1.5	Applicability Statement	6
1.6	Versioning and Localization	6
1.7	Vendor Extensible Fields	6
<b>2</b>	<b>Structures</b>	<b>7</b>
2.1	HRESULT	7
2.1.1	HRESULT Values	10
2.1.2	HRESULT From WIN32 Error Code Macro	202
2.2	Win32 Error Codes	202
2.3	NTSTATUS	374
2.3.1	NTSTATUS Values	374
2.4	LDAP Error to Win32 Error Mapping	486
<b>3</b>	<b>Structure Example</b>	<b>491</b>
<b>4</b>	<b>Security Considerations</b>	<b>492</b>
<b>5</b>	<b>Appendix A: Product Behavior</b>	<b>493</b>
<b>6</b>	<b>Change Tracking</b>	<b>496</b>
<b>7</b>	<b>Index</b>	<b>498</b>

# 1 Introduction

The Windows Error Codes document is a companion reference to the protocol specifications. It documents the common usage details for those HRESULT values, Win32 error codes, and NTSTATUS values that are referenced by specifications in the protocol documentation set.

Sections 1.7 and 2 of this specification are normative ~~and can contain the terms MAY, SHOULD, MUST, MUST NOT, and SHOULD NOT as defined in [RFC2119].~~ All other sections and examples in this specification are informative.

## 1.1 Glossary

~~The~~This document uses the following terms ~~are specific to this document~~:

**HRESULT:** An integer value that indicates the result or status of an operation. A particular HRESULT can have different meanings depending on the protocol using it. See [MS-ERREF] section 2.1 and specific protocol documents for further details.

**message identifier:** A string that uniquely identifies an email message.

**terminal server:** A computer on which **terminal services** is running.

**terminal services (TS):** A service on a server computer that allows delivery of applications, or the desktop itself, to various computing devices. When a user runs an application on a **terminal server**, the application execution takes place on the server computer and only keyboard, mouse, and display information is transmitted over the network. Each user sees only his or her individual session, which is managed transparently by the server operating system and is independent of any other client session.

**universally unique identifier (UUID):** A 128-bit value. UUIDs can be used for multiple purposes, from tagging objects with an extremely short lifetime, to reliably identifying very persistent objects in cross-process communication such as client and server interfaces, manager entry-point vectors, and RPC objects. UUIDs are highly likely to be unique. UUIDs are also known as globally unique identifiers (GUIDs) and these terms are used interchangeably in the Microsoft protocol technical documents (TDs). Interchanging the usage of these terms does not imply or require a specific algorithm or mechanism to generate the UUID. Specifically, the use of this term does not imply or require that the algorithms described in [RFC4122] or [C706] must be used for generating the UUID.

**MAY, SHOULD, MUST, SHOULD NOT, MUST NOT:** These terms (in all caps) are used as defined in [RFC2119]. All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

## 1.2 References

Links to a document in the Microsoft Open Specifications library point to the correct section in the most recently published version of the referenced document. However, because individual documents in the library are not updated at the same time, the section numbers in the documents may not match. You can confirm the correct section numbering by checking the Errata.

### 1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact dochelp@microsoft.com. We will assist you in finding the relevant information.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[RFC2251] Wahl, M., Howes, T., and Kille, S., "Lightweight Directory Access Protocol (v3)", RFC 2251, December 1997, <http://www.ietf.org/rfc/rfc2251.txt>

## 1.2.2 Informative References

None.

## 1.3 Overview

If a protocol returns **HRESULTS**, the protocol uses HRESULTs, as specified in section 2.1.

If a protocol uses Win32 error codes, these values are taken from the Windows error number space, as specified in section 2.2.

If a protocol uses NTSTATUS values, these values are specified in section 2.3.

## 1.4 Relationship to Protocols and Other Structures

The structures documented in this specification do not depend on any other structures or protocols.

The structures in this document are returned by many protocols.

## 1.5 Applicability Statement

The data types specified in this document are applicable for use in any protocol that needs to include a discrete set of error codes.

## 1.6 Versioning and Localization

The structures in the Windows Error Codes require no versioning or localization information.

## 1.7 Vendor Extensible Fields

HRESULTS: Vendors can choose their own values, as long as the **C** bit (0x20000000) is set, indicating it is a customer code. The structures documented in this specification have no vendor-extensible fields.

Win32 Error Codes: Vendors ~~should~~can only reuse ~~those~~these values with their indicated meanings. Choosing any other value runs the risk of a collision in the future.

NTSTATUS: Vendors can choose their own values for this field, as long as the **C** bit (0x20000000) is set, indicating it is a customer code.

## 2 Structures

### 2.1 HRESULT

The HRESULT numbering space is vendor-extensible. Vendors can supply their own values for this field, as long as the **C** bit (0x20000000) is set, indicating it is a customer code.

The HRESULT numbering space has the following internal structure. Any protocol that uses NTSTATUS values on the wire is responsible for stating the order in which the bytes are placed on the wire.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
S	R	C	N	X	Facility											Code															

**S (1 bit):** Severity. If set, indicates a failure result. If clear, indicates a success result.

**R (1 bit):** Reserved. If the **N** bit is clear, this bit MUST be set to 0. If the **N** bit is set, this bit is defined by the NTSTATUS numbering space (as specified in section 2.3).

**C (1 bit):** Customer. This bit specifies if the value is customer-defined or Microsoft-defined. The bit is set for customer-defined values and clear for Microsoft-defined values. <1>

**N (1 bit):** If set, indicates that the error code is an NTSTATUS value (as specified in section 2.3), except that this bit is set.

**X (1 bit):** Reserved. SHOULD be set to 0. <2>

**Facility (11 bits):** An indicator of the source of the error. New facilities are occasionally added by Microsoft.

The following table lists the currently defined facility codes:

Value	Meaning
FACILITY_NULL 0	The default facility code.
FACILITY_RPC 1	The source of the error code is an RPC subsystem.
FACILITY_DISPATCH 2	The source of the error code is a COM Dispatch.
FACILITY_STORAGE 3	The source of the error code is OLE Storage.
FACILITY_ITF 4	The source of the error code is COM/OLE Interface management.
FACILITY_WIN32 7	This region is reserved to map undecorated error codes into HRESULTs.
FACILITY_WINDOWS 8	The source of the error code is the Windows subsystem.
FACILITY_SECURITY	The source of the error code is the Security API layer.

Value	Meaning
9	
FACILITY_SSPI 9	The source of the error code is the Security API layer.
FACILITY_CONTROL 10	The source of the error code is the control mechanism.
FACILITY_CERT 11	The source of the error code is a certificate client or server?
FACILITY_INTERNET 12	The source of the error code is Wininet related.
FACILITY_MEDIASERVER 13	The source of the error code is the Windows Media Server.
FACILITY_MSMQ 14	The source of the error code is the Microsoft Message Queue.
FACILITY_SETUPAPI 15	The source of the error code is the Setup API.
FACILITY_SCARD 16	The source of the error code is the Smart-card subsystem.
FACILITY_COMPLUS 17	The source of the error code is COM+.
FACILITY_AAF 18	The source of the error code is the Microsoft agent.
FACILITY_URT 19	The source of the error code is .NET CLR.
FACILITY_ACS 20	The source of the error code is the audit collection service.
FACILITY_DPLAY 21	The source of the error code is Direct Play.
FACILITY_UMI 22	The source of the error code is the ubiquitous memoryintrospection service.
FACILITY_SXS 23	The source of the error code is Side-by-side servicing.
FACILITY_WINDOWS_CE 24	The error code is specific to Windows CE.
FACILITY_HTTP 25	The source of the error code is HTTP support.
FACILITY_USERMODE_COMMONLOG 26	The source of the error code is common Logging support.
FACILITY_USERMODE_FILTER_MANAGER	The source of the error code is the user mode filter manager.

<b>Value</b>	<b>Meaning</b>
31	
FACILITY_BACKGROUNDCOPY 32	The source of the error code is background copy control
FACILITY_CONFIGURATION 33	The source of the error code is configuration services.
FACILITY_STATE_MANAGEMENT 34	The source of the error code is state management services.
FACILITY_METADIRECTORY 35	The source of the error code is the Microsoft Identity Server.
FACILITY_WINDOWSUPDATE 36	The source of the error code is a Windows update.
FACILITY_DIRECTORYSERVICE 37	The source of the error code is Active Directory.
FACILITY_GRAPHICS 38	The source of the error code is the graphics drivers.
FACILITY_SHELL 39	The source of the error code is the user Shell.
FACILITY_TPM_SERVICES 40	The source of the error code is the Trusted Platform Module services.
FACILITY_TPM_SOFTWARE 41	The source of the error code is the Trusted Platform Module applications.
FACILITY_PLA 48	The source of the error code is Performance Logs and Alerts
FACILITY_FVE 49	The source of the error code is Full volume encryption.
FACILITY_FWP 50	he source of the error code is the Firewall Platform.
FACILITY_WINRM 51	The source of the error code is the Windows Resource Manager.
FACILITY_NDIS 52	The source of the error code is the Network Driver Interface.
FACILITY_USERMODE_HYPERVISOR 53	The source of the error code is the Usermode Hypervisor components.
FACILITY_CMI 54	The source of the error code is the Configuration Management Infrastructure.
FACILITY_USERMODE_VIRTUALIZATION 55	The source of the error code is the user mode virtualization subsystem.
FACILITY_USERMODE_VOLMGR	The source of the error code is the user mode volume manager

Value	Meaning
56	
FACILITY_BCD 57	The source of the error code is the Boot Configuration Database.
FACILITY_USERMODE_VHD 58	The source of the error code is user mode virtual hard disk support.
FACILITY_SDIAG 60	The source of the error code is System Diagnostics.
FACILITY_WEBSERVICES 61	The source of the error code is the Web Services.
FACILITY_WINDOWS_DEFENDER 80	The source of the error code is a Windows Defender component.
FACILITY_OPC 81	The source of the error code is the open connectivity service.

**Code (2 bytes):** The remainder of the error code.

### 2.1.1 HRESULT Values

Combining the fields of an HRESULT into a single, 32-bit numbering space, the following HRESULT values are defined, in addition to those derived from NTSTATUS values (section 2.3.1) and Win32 error codes (section 2.2). This document provides the common usage details of the HRESULTs; individual protocol specifications ~~may~~ provide expanded or modified definitions.

Most values also have a default message defined, which can be used to map the value to a human-readable text message; when this is done, the HRESULT value is also known as a **message identifier**.

Note: In the following descriptions, a percentage sign (%) followed by one or more alphanumeric characters (for example, "%1" or "%hs") indicates a variable that is replaced by text at the time the value is returned.

Return value/code	Description
0x00030200 STG_S_CONVERTED	The underlying file was converted to compound file format.
0x00030201 STG_S_BLOCK	The storage operation should block until more data is available.
0x00030202 STG_S_RETRYNOW	The storage operation should retry immediately.
0x00030203 STG_S_MONITORING	The notified event sink will not influence the storage operation.
0x00030204 STG_S_MULTIPLEOPENS	Multiple opens prevent consolidated (commit succeeded).

<b>Return value/code</b>	<b>Description</b>
0x00030205 STG_S_CONSOLIDATIONFAILED	Consolidation of the storage file failed (commit succeeded).
0x00030206 STG_S_CANNOTCONSOLIDATE	Consolidation of the storage file is inappropriate (commit succeeded).
0x00040000 OLE_S_USEREG	Use the registry database to provide the requested information.
0x00040001 OLE_S_STATIC	Success, but static.
0x00040002 OLE_S_MAC_CLIPFORMAT	Macintosh clipboard format.
0x00040100 DRAGDROP_S_DROP	Successful drop took place.
0x00040101 DRAGDROP_S_CANCEL	Drag-drop operation canceled.
0x00040102 DRAGDROP_S_USEDEFAULTCURSORS	Use the default cursor.
0x00040130 DATA_S_SAMEFORMATETC	Data has same FORMATETC.
0x00040140 VIEW_S_ALREADY_FROZEN	View is already frozen.
0x00040170 CACHE_S_FORMATETC_NOTSUPPORTED	FORMATETC not supported.
0x00040171 CACHE_S_SAMECACHE	Same cache.
0x00040172 CACHE_S_SOMECACHES_NOTUPDATED	Some caches are not updated.
0x00040180 OLEOBJ_S_INVALIDVERB	Invalid verb for OLE object.
0x00040181 OLEOBJ_S_CANNOT_DOVERB_NOW	Verb number is valid but verb cannot be done now.
0x00040182 OLEOBJ_S_INVALIDHWND	Invalid window handle passed.
0x000401A0 INPLACE_S_TRUNCATED	Message is too long; some of it had to be truncated before displaying.
0x000401C0 CONVERT10_S_NO_PRESENTATION	Unable to convert OLESTREAM to IStorage.
0x000401E2	Moniker reduced to itself.

Return value/code	Description
MK_S_REDUCED_TO_SELF	
0x000401E4 MK_S_ME	Common prefix is this moniker.
0x000401E5 MK_S_HIM	Common prefix is input moniker.
0x000401E6 MK_S_US	Common prefix is both monikers.
0x000401E7 MK_S_MONIKERALREADYREGISTERED	Moniker is already registered in running object table.
0x00040200 EVENT_S_SOME_SUBSCRIBERS_FAILED	An event was able to invoke some, but not all, of the subscribers.
0x00040202 EVENT_S_NOSUBSCRIBERS	An event was delivered, but there were no subscribers.
0x00041300 SCHED_S_TASK_READY	The task is ready to run at its next scheduled time.
0x00041301 SCHED_S_TASK_RUNNING	The task is currently running.
0x00041302 SCHED_S_TASK_DISABLED	The task will not run at the scheduled times because it has been disabled.
0x00041303 SCHED_S_TASK_HAS_NOT_RUN	The task has not yet run.
0x00041304 SCHED_S_TASK_NO_MORE_RUNS	There are no more runs scheduled for this task.
0x00041305 SCHED_S_TASK_NOT_SCHEDULED	One or more of the properties that are needed to run this task on a schedule have not been set.
0x00041306 SCHED_S_TASK_TERMINATED	The last run of the task was terminated by the user.
0x00041307 SCHED_S_TASK_NO_VALID_TRIGGERS	Either the task has no triggers, or the existing triggers are disabled or not set.
0x00041308 SCHED_S_EVENT_TRIGGER	Event triggers do not have set run times.
0x0004131B SCHED_S_SOME_TRIGGERS_FAILED	The task is registered, but not all specified triggers will start the task.
0x0004131C SCHED_S_BATCH_LOGON_PROBLEM	The task is registered, but it <b>may</b> fail to start. Batch logon privilege needs to be enabled for the task principal.

Return value/code	Description
0x0004D000 XACT_S_ASYNC	An asynchronous operation was specified. The operation has begun, but its outcome is not known yet.
0x0004D002 XACT_S_READONLY	The method call succeeded because the transaction was read-only.
0x0004D003 XACT_S_SOMENORETAIN	The transaction was successfully aborted. However, this is a coordinated transaction, and a number of enlisted resources were aborted outright because they could not support abort-retaining semantics.
0x0004D004 XACT_S_OKINFORM	No changes were made during this call, but the sink wants another chance to look if any other sinks make further changes.
0x0004D005 XACT_S_MADECHANGESCONTENT	The sink is content and wants the transaction to proceed. Changes were made to one or more resources during this call.
0x0004D006 XACT_S_MADECHANGESINFORM	The sink is for the moment and wants the transaction to proceed, but if other changes are made following this return by other event sinks, this sink wants another chance to look.
0x0004D007 XACT_S_ALLNORETAIN	The transaction was successfully aborted. However, the abort was nonretaining.
0x0004D008 XACT_S_ABORTING	An abort operation was already in progress.
0x0004D009 XACT_S_SINGLEPHASE	The resource manager has performed a single-phase commit of the transaction.
0x0004D00A XACT_S_LOCALLY_OK	The local transaction has not aborted.
0x0004D010 XACT_S_LASTRESOURCEMANAGER	The resource manager has requested to be the coordinator (last resource manager) for the transaction.
0x00080012 CO_S_NOTALLINTERFACES	Not all the requested interfaces were available.
0x00080013 CO_S_MACHINENAMENOTFOUND	The specified machine name was not found in the cache.

<b>Return value/code</b>	<b>Description</b>
0x00090312 SEC_I_CONTINUE_NEEDED	The function completed successfully, but it must be called again to complete the context.
0x00090313 SEC_I_COMPLETE_NEEDED	The function completed successfully, but CompleteToken must be called.
0x00090314 SEC_I_COMPLETE_AND_CONTINUE	The function completed successfully, but both CompleteToken and this function must be called to complete the context.
0x00090315 SEC_I_LOCAL_LOGON	The logon was completed, but no network authority was available. The logon was made using locally known information.
0x00090317 SEC_I_CONTEXT_EXPIRED	The context has expired and can no longer be used.
0x00090320 SEC_I_INCOMPLETE_CREDENTIALS	The credentials supplied were not complete and could not be verified. Additional information can be returned from the context.
0x00090321 SEC_I_RENEGOTIATE	The context data must be renegotiated with the peer.
0x00090323 SEC_I_NO_LSA_CONTEXT	There is no LSA mode context associated with this context.
0x0009035C SEC_I_SIGNATURE_NEEDED	A signature operation must be performed before the user can authenticate.
0x00091012 CRYPT_I_NEW_PROTECTION_REQUIRED	The protected data needs to be reprotected.
0x000D0000 NS_S_CALLPENDING	The requested operation is pending completion.
0x000D0001 NS_S_CALLABORTED	The requested operation was aborted by the client.
0x000D0002 NS_S_STREAM_TRUNCATED	The stream was purposefully stopped before completion.
0x000D0BC8 NS_S_REBUFFERING	The requested operation has caused the source to rebuffer.
0x000D0BC9 NS_S_DEGRADING_QUALITY	The requested operation has caused the source to degrade codec quality.
0x000D0BDB NS_S_TRANSCRIPTOR_EOF	The transcriptor object has reached end of file.

Return value/code	Description
0x000D0FE8 NS_S_WMP_UI_VERSIONMISMATCH	An upgrade <del>may be</del> needed for the theme manager to correctly show this skin. Skin reports version: %.1f.
0x000D0FE9 NS_S_WMP_EXCEPTION	An error occurred in one of the UI components.
0x000D1040 NS_S_WMP_LOADED_GIF_IMAGE	Successfully loaded a GIF file.
0x000D1041 NS_S_WMP_LOADED_PNG_IMAGE	Successfully loaded a PNG file.
0x000D1042 NS_S_WMP_LOADED_BMP_IMAGE	Successfully loaded a BMP file.
0x000D1043 NS_S_WMP_LOADED_JPG_IMAGE	Successfully loaded a JPG file.
0x000D104F NS_S_WMG_FORCE_DROP_FRAME	Drop this frame.
0x000D105F NS_S_WMR_ALREADYRENDERED	The specified stream has already been rendered.
0x000D1060 NS_S_WMR_PINTYPEPARTIALMATCH	The specified type partially matches this pin type.
0x000D1061 NS_S_WMR_PINTYPEFULLMATCH	The specified type fully matches this pin type.
0x000D1066 NS_S_WMG_ADVISE_DROP_FRAME	The timestamp is late compared to the current render position. Advise dropping this frame.
0x000D1067 NS_S_WMG_ADVISE_DROP_TO_KEYFRAME	The timestamp is severely late compared to the current render position. Advise dropping everything up to the next key frame.
0x000D10DB NS_S_NEED_TO_BUY_BURN_RIGHTS	No burn rights. You will be prompted to buy burn rights when you try to burn this file to an audio CD.
0x000D10FE NS_S_WMPCORE_PLAYLISTCLEARABORT	Failed to clear playlist because it was aborted by user.
0x000D10FF NS_S_WMPCORE_PLAYLISTREMOVEITEMABORT	Failed to remove item in the playlist since it was aborted by user.
0x000D1102 NS_S_WMPCORE_PLAYLIST_CREATION_PENDING	Playlist is being generated asynchronously.
0x000D1103 NS_S_WMPCORE_MEDIA_VALIDATION_PENDING	Validation of the media is pending.

<b>Return value/code</b>	<b>Description</b>
0x000D1104 NS_S_WMPCORE_PLAYLIST_REPEAT_SECONDARY_SEGMENTS_IGNORED	Encountered more than one Repeat block during ASX processing.
0x000D1105 NS_S_WMPCORE_COMMAND_NOT_AVAILABLE	Current state of WMP disallows calling this method or property.
0x000D1106 NS_S_WMPCORE_PLAYLIST_NAME_AUTO_GENERATED	Name for the playlist has been auto generated.
0x000D1107 NS_S_WMPCORE_PLAYLIST_IMPORT_MISSING_ITEMS	The imported playlist does not contain all items from the original.
0x000D1108 NS_S_WMPCORE_PLAYLIST_COLLAPSED_TO_SINGLE_MEDIA	The M3U playlist has been ignored because it only contains one item.
0x000D1109 NS_S_WMPCORE_MEDIA_CHILD_PLAYLIST_OPEN_PENDING	The open for the child playlist associated with this media is pending.
0x000D110A NS_S_WMPCORE_MORE_NODES_AVAILABLE	More nodes support the interface requested, but the array for returning them is full.
0x000D1135 NS_S_WMPBR_SUCCESS	Backup or Restore successful!
0x000D1136 NS_S_WMPBR_PARTIALSUCCESS	Transfer complete with limitations.
0x000D1144 NS_S_WMPEFFECT_TRANSPARENT	Request to the effects control to change transparency status to transparent.
0x000D1145 NS_S_WMPEFFECT_OPAQUE	Request to the effects control to change transparency status to opaque.
0x000D114E NS_S_OPERATION_PENDING	The requested application pane is performing an operation and will not be released.
0x000D1359 NS_S_TRACK_BUY_REQUIRES_ALBUM_PURCHASE	The file is only available for purchase when you buy the entire album.
0x000D135E NS_S_NAVIGATION_COMPLETE_WITH_ERRORS	There were problems completing the requested navigation. There are identifiers missing in the catalog.
0x000D1361 NS_S_TRACK_ALREADY_DOWNLOADED	Track already downloaded.
0x000D1519 NS_S_PUBLISHING_POINT_STARTED_WITH_FAILED_SINKS	The publishing point successfully started, but one or more of the requested data writer plug-ins failed.

<b>Return value/code</b>	<b>Description</b>
0x000D2726 NS_S_DRM_LICENSE_ACQUIRED	Status message: The license was acquired.
0x000D2727 NS_S_DRM_INDIVIDUALIZED	Status message: The security upgrade has been completed.
0x000D2746 NS_S_DRM_MONITOR_CANCELLED	Status message: License monitoring has been canceled.
0x000D2747 NS_S_DRM_ACQUIRE_CANCELLED	Status message: License acquisition has been canceled.
0x000D276E NS_S_DRM_BURNABLE_TRACK	The track is burnable and had no playlist burn limit.
0x000D276F NS_S_DRM_BURNABLE_TRACK_WITH_PLAYLIST_RESTRICTION	The track is burnable but has a playlist burn limit.
0x000D27DE NS_S_DRM_NEEDS_INDIVIDUALIZATION	A security upgrade is required to perform the operation on this media file.
0x000D2AF8 NS_S_REBOOT_RECOMMENDED	Installation was successful; however, some file cleanup is not complete. For best results, restart your computer.
0x000D2AF9 NS_S_REBOOT_REQUIRED	Installation was successful; however, some file cleanup is not complete. To continue, you must restart your computer.
0x000D2F09 NS_S_EOSRECEDING	EOS hit during rewinding.
0x000D2F0D NS_S_CHANGENOTICE	Internal.
0x001F0001 ERROR_FLT_IO_COMPLETE	The IO was completed by a filter.
0x00262307 ERROR_GRAPHICS_MODE_NOT_PINNED	No mode is pinned on the specified VidPN source or target.
0x0026231E ERROR_GRAPHICS_NO_PREFERRED_MODE	Specified mode set does not specify preference for one of its modes.
0x0026234B ERROR_GRAPHICS_DATASET_IS_EMPTY	Specified data set (for example, mode set, frequency range set, descriptor set, and topology) is empty.
0x0026234C ERROR_GRAPHICS_NO_MORE_ELEMENTS_IN_DATASET	Specified data set (for example, mode set, frequency range set, descriptor set, and topology) does not contain any more elements.

<b>Return value/code</b>	<b>Description</b>
0x00262351 ERROR_GRAPHICS_PATH_CONTENT_GEOMETRY_TRANSFORMATION_NOT_PINNED	Specified content transformation is not pinned on the specified VidPN present path.
0x00300100 PLA_S_PROPERTY_IGNORED	Property value will be ignored.
0x00340001 ERROR_NDIS_INDICATION_REQUIRED	The request will be completed later by a Network Driver Interface Specification (NDIS) status indication.
0x0DEAD100 TRK_S_OUT_OF_SYNC	The VolumeSequenceNumber of a MOVE_NOTIFICATION request is incorrect.
0x0DEAD102 TRK_VOLUME_NOT_FOUND	The VolumeID in a request was not found in the server's ServerVolumeTable.
0x0DEAD103 TRK_VOLUME_NOT_OWNED	A notification was sent to the LnkSvrMessage method, but the RequestMachine for the request was not the VolumeOwner for a VolumeID in the request.
0x0DEAD107 TRK_S_NOTIFICATION_QUOTA_EXCEEDED	The server received a MOVE_NOTIFICATION request, but the FileTable size limit has already been reached.
0x400D004F NS_I_TIGER_START	The Title Server %1 is running.
0x400D0051 NS_I_CUB_START	Content Server %1 (%2) is starting.
0x400D0052 NS_I_CUB_RUNNING	Content Server %1 (%2) is running.
0x400D0054 NS_I_DISK_START	Disk %1 ( %2 ) on Content Server %3, is running.
0x400D0056 NS_I_DISK_REBUILD_STARTED	Started rebuilding disk %1 ( %2 ) on Content Server %3.
0x400D0057 NS_I_DISK_REBUILD_FINISHED	Finished rebuilding disk %1 ( %2 ) on Content Server %3.
0x400D0058 NS_I_DISK_REBUILD_ABORTED	Aborted rebuilding disk %1 ( %2 ) on Content Server %3.
0x400D0059 NS_I_LIMIT_FUNNELS	A NetShow administrator at network location %1 set the data stream limit to %2 streams.
0x400D005A NS_I_START_DISK	A NetShow administrator at network location %1 started

Return value/code	Description
	disk %2.
0x400D005B NS_I_STOP_DISK	A NetShow administrator at network location %1 stopped disk %2.
0x400D005C NS_I_STOP_CUB	A NetShow administrator at network location %1 stopped Content Server %2.
0x400D005D NS_I_KILL_USERSESSION	A NetShow administrator at network location %1 aborted user session %2 from the system.
0x400D005E NS_I_KILL_CONNECTION	A NetShow administrator at network location %1 aborted obsolete connection %2 from the system.
0x400D005F NS_I_REBUILD_DISK	A NetShow administrator at network location %1 started rebuilding disk %2.
0x400D0069 MCMADM_I_NO_EVENTS	Event initialization failed, there will be no MCM events.
0x400D006E NS_I_LOGGING_FAILED	The logging operation failed.
0x400D0070 NS_I_LIMIT_BANDWIDTH	A NetShow administrator at network location %1 set the maximum bandwidth limit to %2 bps.
0x400D0191 NS_I_CUB_UNFAIL_LINK	Content Server %1 (%2) has established its link to Content Server %3.
0x400D0193 NS_I_RESTRIPE_START	Restripe operation has started.
0x400D0194 NS_I_RESTRIPE_DONE	Restripe operation has completed.
0x400D0196 NS_I_RESTRIPE_DISK_OUT	Content disk %1 (%2) on Content Server %3 has been restriped out.
0x400D0197 NS_I_RESTRIPE_CUB_OUT	Content server %1 (%2) has been restriped out.
0x400D0198 NS_I_DISK_STOP	Disk %1 ( %2 ) on Content Server %3, has been offlined.
0x400D14BE NS_I_PLAYLIST_CHANGE_RECEDING	The playlist change occurred while receding.
0x400D2EFF NS_I_RECONNECTED	The client is reconnected.

<b>Return value/code</b>	<b>Description</b>
0x400D2F01 NS_I_NOLOG_STOP	Forcing a switch to a pending header on start.
0x400D2F03 NS_I_EXISTING_PACKETIZER	There is already an existing packetizer plugin for the stream.
0x400D2F04 NS_I_MANUAL_PROXY	The proxy setting is manual.
0x40262009 ERROR_GRAPHICS_DRIVER_MISMATCH	The kernel driver detected a version mismatch between it and the user mode driver.
0x4026242F ERROR_GRAPHICS_UNKNOWN_CHILD_STATUS	Child device presence was not reliably detected.
0x40262437 ERROR_GRAPHICS_LEADLINK_START_DEFERRED	Starting the lead-link adapter has been deferred temporarily.
0x40262439 ERROR_GRAPHICS_POLLING_TOO_FREQUENTLY	The display adapter is being polled for children too frequently at the same polling level.
0x4026243A ERROR_GRAPHICS_START_DEFERRED	Starting the adapter has been deferred temporarily.
0x8000000A E_PENDING	The data necessary to complete this operation is not yet available.
0x80004001 E_NOTIMPL	Not implemented.
0x80004002 E_NOINTERFACE	No such interface supported.
0x80004003 E_POINTER	Invalid pointer.
0x80004004 E_ABORT	Operation aborted.
0x80004005 E_FAIL	Unspecified error.
0x80004006 CO_E_INIT_TLS	Thread local storage failure.
0x80004007 CO_E_INIT_SHARED_ALLOCATOR	Get shared memory allocator failure.
0x80004008 CO_E_INIT_MEMORY_ALLOCATOR	Get memory allocator failure.
0x80004009 CO_E_INIT_CLASS_CACHE	Unable to initialize class cache.

Return value/code	Description
0x8000400A CO_E_INIT_RPC_CHANNEL	Unable to initialize remote procedure call (RPC) services.
0x8000400B CO_E_INIT_TLS_SET_CHANNEL_CONTROL	Cannot set thread local storage channel control.
0x8000400C CO_E_INIT_TLS_CHANNEL_CONTROL	Could not allocate thread local storage channel control.
0x8000400D CO_E_INIT_UNACCEPTED_USER_ALLOCATOR	The user-supplied memory allocator is unacceptable.
0x8000400E CO_E_INIT_SCM_MUTEX_EXISTS	The OLE service mutex already exists.
0x8000400F CO_E_INIT_SCM_FILE_MAPPING_EXISTS	The OLE service file mapping already exists.
0x80004010 CO_E_INIT_SCM_MAP_VIEW_OF_FILE	Unable to map view of file for OLE service.
0x80004011 CO_E_INIT_SCM_EXEC_FAILURE	Failure attempting to launch OLE service.
0x80004012 CO_E_INIT_ONLY_SINGLE_THREADED	There was an attempt to call CoInitialize a second time while single-threaded.
0x80004013 CO_E_CANT_REMOTE	A Remote activation was necessary but was not allowed.
0x80004014 CO_E_BAD_SERVER_NAME	A Remote activation was necessary, but the server name provided was invalid.
0x80004015 CO_E_WRONG_SERVER_IDENTITY	The class is configured to run as a security ID different from the caller.
0x80004016 CO_E_OLE1DDE_DISABLED	Use of OLE1 services requiring Dynamic Data Exchange (DDE) Windows is disabled.
0x80004017 CO_E_RUNAS_SYNTAX	A RunAs specification must be <domain name>\<user name> or simply <user name>.
0x80004018 CO_E_CREATEPROCESS_FAILURE	The server process could not be started. The path name <b>may</b> be incorrect.
0x80004019 CO_E_RUNAS_CREATEPROCESS_FAILURE	The server process could not be started as the configured identity. The path name <b>may</b> be incorrect or unavailable.
0x8000401A CO_E_RUNAS_LOGON_FAILURE	The server process could not be started because the configured identity is incorrect. Check the

Return value/code	Description
	user name and password.
0x8000401B CO_E_LAUNCH_PERMSSION_DENIED	The client is not allowed to launch this server.
0x8000401C CO_E_START_SERVICE_FAILURE	The service providing this server could not be started.
0x8000401D CO_E_REMOTE_COMMUNICATION_FAILURE	This computer was unable to communicate with the computer providing the server.
0x8000401E CO_E_SERVER_START_TIMEOUT	The server did not respond after being launched.
0x8000401F CO_E_CLSREG_INCONSISTENT	The registration information for this server is inconsistent or incomplete.
0x80004020 CO_E_IIDREG_INCONSISTENT	The registration information for this interface is inconsistent or incomplete.
0x80004021 CO_E_NOT_SUPPORTED	The operation attempted is not supported.
0x80004022 CO_E_RELOAD_DLL	A DLL must be loaded.
0x80004023 CO_E_MSI_ERROR	A Microsoft Software Installer error was encountered.
0x80004024 CO_E_ATTEMPT_TO_CREATE_OUTSIDE_CLIENT_CONTEXT	The specified activation could not occur in the client context as specified.
0x80004025 CO_E_SERVER_PAUSED	Activations on the server are paused.
0x80004026 CO_E_SERVER_NOT_PAUSED	Activations on the server are not paused.
0x80004027 CO_E_CLASS_DISABLED	The component or application containing the component has been disabled.
0x80004028 CO_E_CLRNOTAVAILABLE	The common language runtime is not available.
0x80004029 CO_E_ASYNC_WORK_REJECTED	The thread-pool rejected the submitted asynchronous work.
0x8000402A CO_E_SERVER_INIT_TIMEOUT	The server started, but it did not finish initializing in a timely fashion.
0x8000402B CO_E_NO_SECCTX_IN_ACTIVATE	Unable to complete the call because there is no COM+ security context inside IObjectControl.Activate.

Return value/code	Description
0x80004030 CO_E_TRACKER_CONFIG	The provided tracker configuration is invalid.
0x80004031 CO_E_THREADPOOL_CONFIG	The provided thread pool configuration is invalid.
0x80004032 CO_E_SXS_CONFIG	The provided side-by-side configuration is invalid.
0x80004033 CO_E_MALFORMED_SPN	The server principal name (SPN) obtained during security negotiation is malformed.
0x8000FFFF E_UNEXPECTED	Catastrophic failure.
0x80010001 RPC_E_CALL_REJECTED	Call was rejected by callee.
0x80010002 RPC_E_CALL_CANCELED	Call was canceled by the message filter.
0x80010003 RPC_E_CANTPOST_INSENDCALL	The caller is dispatching an intertask SendMessage call and cannot call out via PostMessage.
0x80010004 RPC_E_CANTCALLOUT_INASYNCALL	The caller is dispatching an asynchronous call and cannot make an outgoing call on behalf of this call.
0x80010005 RPC_E_CANTCALLOUT_INEXTERNALCALL	It is illegal to call out while inside message filter.
0x80010006 RPC_E_CONNECTION_TERMINATED	The connection terminated or is in a bogus state and can no longer be used. Other connections are still valid.
0x80010007 RPC_E_SERVER_DIED	The callee (the server, not the server application) is not available and disappeared; all connections are invalid. The call <b>may</b> have executed.
0x80010008 RPC_E_CLIENT_DIED	The caller (client) disappeared while the callee (server) was processing a call.
0x80010009 RPC_E_INVALID_DATAPACKET	The data packet with the marshaled parameter data is incorrect.
0x8001000A RPC_E_CANTTRANSMIT_CALL	The call was not transmitted properly; the message queue was full and was not emptied after yielding.
0x8001000B RPC_E_CLIENT_CANTMARSHAL_DATA	The client RPC caller cannot marshal the parameter data due

Return value/code	Description
	to errors (such as low memory).
0x8001000C RPC_E_CLIENT_CANTUNMARSHAL_DATA	The client RPC caller cannot unmarshal the return data due to errors (such as low memory).
0x8001000D RPC_E_SERVER_CANTMARSHAL_DATA	The server RPC callee cannot marshal the return data due to errors (such as low memory).
0x8001000E RPC_E_SERVER_CANTUNMARSHAL_DATA	The server RPC callee cannot unmarshal the parameter data due to errors (such as low memory).
0x8001000F RPC_E_INVALID_DATA	Received data is invalid. The data <b>may</b> be server or client data.
0x80010010 RPC_E_INVALID_PARAMETER	A particular parameter is invalid and cannot be (un)marshaled.
0x80010011 RPC_E_CANTCALLOUT_AGAIN	There is no second outgoing call on same channel in DDE conversation.
0x80010012 RPC_E_SERVER_DIED_DNE	The callee (the server, not the server application) is not available and disappeared; all connections are invalid. The call did not execute.
0x80010100 RPC_E_SYS_CALL_FAILED	System call failed.
0x80010101 RPC_E_OUT_OF_RESOURCES	Could not allocate some required resource (such as memory or events)
0x80010102 RPC_E_ATTEMPTED_MULTITHREAD	Attempted to make calls on more than one thread in single-threaded mode.
0x80010103 RPC_E_NOT_REGISTERED	The requested interface is not registered on the server object.
0x80010104 RPC_E_FAULT	RPC could not call the server or could not return the results of calling the server.
0x80010105 RPC_E_SERVERFAULT	The server threw an exception.
0x80010106 RPC_E_CHANGED_MODE	Cannot change thread mode after it is set.
0x80010107 RPC_E_INVALIDMETHOD	The method called does not exist on the server.
0x80010108 RPC_E_DISCONNECTED	The object invoked has disconnected from its clients.

<b>Return value/code</b>	<b>Description</b>
0x80010109 RPC_E_RETRY	The object invoked chose not to process the call now. Try again later.
0x8001010A RPC_E_SERVERCALL_RETRYLATER	The message filter indicated that the application is busy.
0x8001010B RPC_E_SERVERCALL_REJECTED	The message filter rejected the call.
0x8001010C RPC_E_INVALID_CALldata	A call control interface was called with invalid data.
0x8001010D RPC_E_CANTCALLOUT_ININPUTSYNCCALL	An outgoing call cannot be made because the application is dispatching an input-synchronous call.
0x8001010E RPC_E_WRONG_THREAD	The application called an interface that was marshaled for a different thread.
0x8001010F RPC_E_THREAD_NOT_INIT	CoInitialize has not been called on the current thread.
0x80010110 RPC_E_VERSION_MISMATCH	The version of OLE on the client and server machines does not match.
0x80010111 RPC_E_INVALID_HEADER	OLE received a packet with an invalid header.
0x80010112 RPC_E_INVALID_EXTENSION	OLE received a packet with an invalid extension.
0x80010113 RPC_E_INVALID_IPID	The requested object or interface does not exist.
0x80010114 RPC_E_INVALID_OBJECT	The requested object does not exist.
0x80010115 RPC_S_CALLPENDING	OLE has sent a request and is waiting for a reply.
0x80010116 RPC_S_WAITONTIMER	OLE is waiting before retrying a request.
0x80010117 RPC_E_CALL_COMPLETE	Call context cannot be accessed after call completed.
0x80010118 RPC_E_UNSECURE_CALL	Impersonate on unsecure calls is not supported.
0x80010119 RPC_E_TOO_LATE	Security must be initialized before any interfaces are marshaled or unmarshaled. It cannot be changed after initialized.

<b>Return value/code</b>	<b>Description</b>
0x8001011A RPC_E_NO_GOOD_SECURITY_PACKAGES	No security packages are installed on this machine, the user is not logged on, or there are no compatible security packages between the client and server.
0x8001011B RPC_E_ACCESS_DENIED	Access is denied.
0x8001011C RPC_E_REMOTE_DISABLED	Remote calls are not allowed for this process.
0x8001011D RPC_E_INVALID_OBJREF	The marshaled interface data packet (OBJREF) has an invalid or unknown format.
0x8001011E RPC_E_NO_CONTEXT	No context is associated with this call. This happens for some custom marshaled calls and on the client side of the call.
0x8001011F RPC_E_TIMEOUT	This operation returned because the time-out period expired.
0x80010120 RPC_E_NO_SYNC	There are no synchronize objects to wait on.
0x80010121 RPC_E_FULLSIC_REQUIRED	Full subject issuer chain Secure Sockets Layer (SSL) principal name expected from the server.
0x80010122 RPC_E_INVALID_STD_NAME	Principal name is not a valid Microsoft standard (msstd) name.
0x80010123 CO_E_FAILEDTOIMPERSONATE	Unable to impersonate DCOM client.
0x80010124 CO_E_FAILEDTOGETSECCTX	Unable to obtain server's security context.
0x80010125 CO_E_FAILEDTOOPENTHREADTOKEN	Unable to open the access token of the current thread.
0x80010126 CO_E_FAILEDTOGETTOKENINFO	Unable to obtain user information from an access token.
0x80010127 CO_E_TRUSTEDOESNTMATCHCLIENT	The client who called IAccessControl::IsAccessPermitted was not the trustee provided to the method.
0x80010128 CO_E_FAILEDTOQUERYCLIENTBLANKET	Unable to obtain the client's security blanket.
0x80010129 CO_E_FAILEDTOSETDACL	Unable to set a discretionary access control list (ACL) into a security descriptor.

Return value/code	Description
0x8001012A CO_E_ACCESSCHECKFAILED	The system function AccessCheck returned false.
0x8001012B CO_E_NETACCESSAPIFAILED	Either NetAccessDel or NetAccessAdd returned an error code.
0x8001012C CO_E_WRONGTRUSTEENAMESYNTAX	One of the trustee strings provided by the user did not conform to the <Domain>\<Name> syntax and it was not the "*" string".
0x8001012D CO_E_INVALIDSID	One of the security identifiers provided by the user was invalid.
0x8001012E CO_E_CONVERSIONFAILED	Unable to convert a wide character trustee string to a multiple-byte trustee string.
0x8001012F CO_E_NOMATCHINGSIDFOUND	Unable to find a security identifier that corresponds to a trustee string provided by the user.
0x80010130 CO_E_LOOKUPACCSIDFAILED	The system function LookupAccountSID failed.
0x80010131 CO_E_NOMATCHINGNAMEFOUND	Unable to find a trustee name that corresponds to a security identifier provided by the user.
0x80010132 CO_E_LOOKUPACCNAMEFAILED	The system function LookupAccountName failed.
0x80010133 CO_E_SETSERLHNDLFAILED	Unable to set or reset a serialization handle.
0x80010134 CO_E_FAILEDTOGETWINDIR	Unable to obtain the Windows directory.
0x80010135 CO_E_PATHTOOLONG	Path too long.
0x80010136 CO_E_FAILEDTOGENUUID	Unable to generate a <b>UUID</b> .
0x80010137 CO_E_FAILEDTOCREATEFILE	Unable to create file.
0x80010138 CO_E_FAILEDTOCLOSEHANDLE	Unable to close a serialization handle or a file handle.
0x80010139 CO_E_EXCEEDSYSACLIMIT	The number of access control entries (ACEs) in an ACL exceeds the system limit.
0x8001013A	Not all the DENY_ACCESS ACEs are arranged in front of the

<b>Return value/code</b>	<b>Description</b>
CO_E_ACESINWRONGORDER	GRANT_ACCESS ACEs in the stream.
0x8001013B CO_E_INCOMPATIBLESTREAMVERSION	The version of ACL format in the stream is not supported by this implementation of IAccessControl.
0x8001013C CO_E_FAILEDTOOPENPROCESSTOKEN	Unable to open the access token of the server process.
0x8001013D CO_E_DECODEFAILED	Unable to decode the ACL in the stream provided by the user.
0x8001013F CO_E_ACNOTINITIALIZED	The COM IAccessControl object is not initialized.
0x80010140 CO_E_CANCEL_DISABLED	Call Cancellation is disabled.
0x8001FFFF RPC_E_UNEXPECTED	An internal error occurred.
0x80020001 DISP_E_UNKNOWNINTERFACE	Unknown interface.
0x80020003 DISP_E_MEMBERNOTFOUND	Member not found.
0x80020004 DISP_E_PARAMNOTFOUND	Parameter not found.
0x80020005 DISP_E_TYEMISMATCH	Type mismatch.
0x80020006 DISP_E_UNKNOWNNAME	Unknown name.
0x80020007 DISP_E_NONAMEDARGS	No named arguments.
0x80020008 DISP_E_BADVARTYPE	Bad variable type.
0x80020009 DISP_E_EXCEPTION	Exception occurred.
0x8002000A DISP_E_OVERFLOW	Out of present range.
0x8002000B DISP_E_BADINDEX	Invalid index.
0x8002000C DISP_E_UNKNOWNLCID	Unknown language.
0x8002000D DISP_E_ARRAYISLOCKED	Memory is locked.

<b>Return value/code</b>	<b>Description</b>
0x8002000E DISP_E_BADPARAMCOUNT	Invalid number of parameters.
0x8002000F DISP_E_PARAMNOTOPTIONAL	Parameter not optional.
0x80020010 DISP_E_BADCALLEE	Invalid callee.
0x80020011 DISP_E_NOTACOLLECTION	Does not support a collection.
0x80020012 DISP_E_DIVBYZERO	Division by zero.
0x80020013 DISP_E_BUFFERTOOSMALL	Buffer too small.
0x80028016 TYPE_E_BUFFERTOOSMALL	Buffer too small.
0x80028017 TYPE_E_FIELDNOTFOUND	Field name not defined in the record.
0x80028018 TYPE_E_INVDATAREAD	Old format or invalid type library.
0x80028019 TYPE_E_UNSUPFORMAT	Old format or invalid type library.
0x8002801C TYPE_E_REGISTRYACCESS	Error accessing the OLE registry.
0x8002801D TYPE_E_LIBNOTREGISTERED	Library not registered.
0x80028027 TYPE_E_UNDEFINEDTYPE	Bound to unknown type.
0x80028028 TYPE_E_QUALIFIEDNAMEDISALLOWED	Qualified name disallowed.
0x80028029 TYPE_E_INVALIDSTATE	Invalid forward reference, or reference to uncompiled type.
0x8002802A TYPE_E_WRONGTYPEKIND	Type mismatch.
0x8002802B TYPE_E_ELEMENTNOTFOUND	Element not found.
0x8002802C TYPE_E_AMBIGUOUSNAME	Ambiguous name.
0x8002802D TYPE_E_NAMECONFLICT	Name already exists in the library.

Return value/code	Description
0x8002802E TYPE_E_UNKNOWNLCID	Unknown language code identifier (LCID).
0x8002802F TYPE_E_DLLFUNCTIONNOTFOUND	Function not defined in specified DLL.
0x800288BD TYPE_E_BADMODULEKIND	Wrong module kind for the operation.
0x800288C5 TYPE_E_SIZETOOBIG	Size <del>may not</del> cannot exceed 64 KB.
0x800288C6 TYPE_E_DUPLICATEID	Duplicate ID in inheritance hierarchy.
0x800288CF TYPE_E_INVALIDID	Incorrect inheritance depth in standard OLE hmember.
0x80028CA0 TYPE_E_TYPEMISMATCH	Type mismatch.
0x80028CA1 TYPE_E_OUTOFBOUNDS	Invalid number of arguments.
0x80028CA2 TYPE_E_IOERROR	I/O error.
0x80028CA3 TYPE_E_CANTCREATETMPFILE	Error creating unique .tmp file.
0x80029C4A TYPE_E_CANTLOADLIBRARY	Error loading type library or DLL.
0x80029C83 TYPE_E_INCONSISTENTPROPFUNCS	Inconsistent property functions.
0x80029C84 TYPE_E_CIRCULARTYPE	Circular dependency between types and modules.
0x80030001 STG_E_INVALIDFUNCTION	Unable to perform requested operation.
0x80030002 STG_E_FILENOTFOUND	%1 could not be found.
0x80030003 STG_E_PATHNOTFOUND	The path %1 could not be found.
0x80030004 STG_E_TOOMANYOPENFILES	There are insufficient resources to open another file.
0x80030005 STG_E_ACCESSDENIED	Access denied.
0x80030006 STG_E_INVALIDHANDLE	Attempted an operation on an invalid object.

<b>Return value/code</b>	<b>Description</b>
0x80030008 STG_E_INSUFFICIENTMEMORY	There is insufficient memory available to complete operation.
0x80030009 STG_E_INVALIDPOINTER	Invalid pointer error.
0x80030012 STG_E_NOMOREFILES	There are no more entries to return.
0x80030013 STG_E_DISKISWRITEPROTECTED	Disk is write-protected.
0x80030019 STG_E_SEEKERROR	An error occurred during a seek operation.
0x8003001D STG_E_WRITEFAULT	A disk error occurred during a write operation.
0x8003001E STG_E_READFAULT	A disk error occurred during a read operation.
0x80030020 STG_E_SHAREVIOLATION	A share violation has occurred.
0x80030021 STG_E_LOCKVIOLATION	A lock violation has occurred.
0x80030050 STG_E_FILEALREADYEXISTS	%1 already exists.
0x80030057 STG_E_INVALIDPARAMETER	Invalid parameter error.
0x80030070 STG_E_MEDIUMFULL	There is insufficient disk space to complete operation.
0x800300F0 STG_E_PROPSETMISMATCHED	Illegal write of non-simple property to simple property set.
0x800300FA STG_E_ABNORMALAPIEXIT	An application programming interface (API) call exited abnormally.
0x800300FB STG_E_INVALIDHEADER	The file %1 is not a valid compound file.
0x800300FC STG_E_INVALIDNAME	The name %1 is not valid.
0x800300FD STG_E_UNKNOWN	An unexpected error occurred.
0x800300FE STG_E_UNIMPLEMENTEDFUNCTION	That function is not implemented.
0x800300FF STG_E_INVALIDFLAG	Invalid flag error.

<b>Return value/code</b>	<b>Description</b>
0x80030100 STG_E_INUSE	Attempted to use an object that is busy.
0x80030101 STG_E_NOTCURRENT	The storage has been changed since the last commit.
0x80030102 STG_E_REVERTED	Attempted to use an object that has ceased to exist.
0x80030103 STG_E_CANTSAVE	Cannot save.
0x80030104 STG_E_OLDFORMAT	The compound file %1 was produced with an incompatible version of storage.
0x80030105 STG_E_OLDDLL	The compound file %1 was produced with a newer version of storage.
0x80030106 STG_E_SHAREREQUIRED	Share.exe or equivalent is required for operation.
0x80030107 STG_E_NOTFILEBASEDSTORAGE	Illegal operation called on non-file based storage.
0x80030108 STG_E_EXTANTMARSHALLINGS	Illegal operation called on object with extant marshalings.
0x80030109 STG_E_DOCFILECORRUPT	The docfile has been corrupted.
0x80030110 STG_E_BADBASEADDRESS	OLE32.DLL has been loaded at the wrong address.
0x80030111 STG_E_DOCFILETOOLARGE	The compound file is too large for the current implementation.
0x80030112 STG_E_NOTSIMPLEFORMAT	The compound file was not created with the STGM_SIMPLE flag.
0x80030201 STG_E_INCOMPLETE	The file download was aborted abnormally. The file is incomplete.
0x80030202 STG_E_TERMINATED	The file download has been terminated.
0x80030305 STG_E_STATUS_COPY_PROTECTION_FAILURE	Generic Copy Protection Error.
0x80030306 STG_E_CSS_AUTHENTICATION_FAILURE	Copy Protection Error—DVD CSS Authentication failed.
0x80030307 STG_E_CSS_KEY_NOT_PRESENT	Copy Protection Error—The given sector does not have a valid CSS key.

Return value/code	Description
0x80030308 STG_E_CSS_KEY_NOT_ESTABLISHED	Copy Protection Error—DVD session key not established.
0x80030309 STG_E_CSS_SCRAMBLED_SECTOR	Copy Protection Error—The read failed because the sector is encrypted.
0x8003030A STG_E_CSS_REGION_MISMATCH	Copy Protection Error—The current DVD's region does not correspond to the region setting of the drive.
0x8003030B STG_E_RESETS_EXHAUSTED	Copy Protection Error—The drive's region setting <b>may</b> be permanent or the number of user resets has been exhausted.
0x80040000 OLE_E_OLEVERB	Invalid OLEVERB structure.
0x80040001 OLE_E_ADVFL	Invalid advise flags.
0x80040002 OLE_E_ENUM_NOMORE	Cannot enumerate any more because the associated data is missing.
0x80040003 OLE_E_ADVISENOTSUPPORTED	This implementation does not take advises.
0x80040004 OLE_E_NOCONNECTION	There is no connection for this connection ID.
0x80040005 OLE_E_NOTRUNNING	Need to run the object to perform this operation.
0x80040006 OLE_E_NOCACHE	There is no cache to operate on.
0x80040007 OLE_E_BLANK	Uninitialized object.
0x80040008 OLE_E_CLASSDIFF	Linked object's source class has changed.
0x80040009 OLE_E_CANT_GETMONIKER	Not able to get the moniker of the object.
0x8004000A OLE_E_CANT_BINDTOSOURCE	Not able to bind to the source.
0x8004000B OLE_E_STATIC	Object is static; operation not allowed.
0x8004000C OLE_E_PROMPTSAVECANCELLED	User canceled out of the Save dialog box.
0x8004000D	Invalid rectangle.

Return value/code	Description
OLE_E_INVALIDRECT	
0x8004000E OLE_E_WRONGCOMPOBJ	comobj.dll is too old for the ole2.dll initialized.
0x8004000F OLE_E_INVALIDHWND	Invalid window handle.
0x80040010 OLE_E_NOT_INPLACEACTIVE	Object is not in any of the inplace active states.
0x80040011 OLE_E_CANTCONVERT	Not able to convert object.
0x80040012 OLE_E_NOSTORAGE	Not able to perform the operation because object is not given storage yet.
0x80040064 DV_E_FORMATETC	Invalid FORMATETC structure.
0x80040065 DV_E_DVTARGETDEVICE	Invalid DVTARGETDEVICE structure.
0x80040066 DV_E_STGMEDIUM	Invalid STGMEDIUM structure.
0x80040067 DV_E_STATDATA	Invalid STATDATA structure.
0x80040068 DV_E_LINDEX	Invalid lindex.
0x80040069 DV_E_TYMED	Invalid TYMED structure.
0x8004006A DV_E_CLIPFORMAT	Invalid clipboard format.
0x8004006B DV_E_DVASPECT	Invalid aspects.
0x8004006C DV_E_DVTARGETDEVICE_SIZE	The <i>tdSize</i> parameter of the DVTARGETDEVICE structure is invalid.
0x8004006D DV_E_NOVIEWOBJECT	Object does not support IViewObject interface.
0x80040100 DRAGDROP_E_NOTREGISTERED	Trying to revoke a drop target that has not been registered.
0x80040101 DRAGDROP_E_ALREADYREGISTERED	This window has already been registered as a drop target.
0x80040102 DRAGDROP_E_INVALIDHWND	Invalid window handle.

<b>Return value/code</b>	<b>Description</b>
0x80040110 CLASS_E_NOAGGREGATION	Class does not support aggregation (or class object is remote).
0x80040111 CLASS_E_CLASSNOTAVAILABLE	ClassFactory cannot supply requested class.
0x80040112 CLASS_E_NOTLICENSED	Class is not licensed for use.
0x80040140 VIEW_E_DRAW	Error drawing view.
0x80040150 REGDB_E_READREGDB	Could not read key from registry.
0x80040151 REGDB_E_WRITEREGDB	Could not write key to registry.
0x80040152 REGDB_E_KEYMISSING	Could not find the key in the registry.
0x80040153 REGDB_E_INVALIDVALUE	Invalid value for registry.
0x80040154 REGDB_E_CLASSNOTREG	Class not registered.
0x80040155 REGDB_E_IIDNOTREG	Interface not registered.
0x80040156 REGDB_E_BADTHREADINGMODEL	Threading model entry is not valid.
0x80040160 CAT_E_CATIDNOEXIST	CATID does not exist.
0x80040161 CAT_E_NODESCRIPTION	Description not found.
0x80040164 CS_E_PACKAGE_NOTFOUND	No package in the software installation data in Active Directory meets this criteria.
0x80040165 CS_E_NOT_DELETABLE	Deleting this will break the referential integrity of the software installation data in Active Directory.
0x80040166 CS_E_CLASS_NOTFOUND	The CLSID was not found in the software installation data in Active Directory.
0x80040167 CS_E_INVALID_VERSION	The software installation data in Active Directory is corrupt.
0x80040168 CS_E_NO_CLASSSTORE	There is no software installation data in Active Directory.

<b>Return value/code</b>	<b>Description</b>
0x80040169 CS_E_OBJECT_NOTFOUND	There is no software installation data object in Active Directory.
0x8004016A CS_E_OBJECT_ALREADY_EXISTS	The software installation data object in Active Directory already exists.
0x8004016B CS_E_INVALID_PATH	The path to the software installation data in Active Directory is not correct.
0x8004016C CS_E_NETWORK_ERROR	A network error interrupted the operation.
0x8004016D CS_E_ADMIN_LIMIT_EXCEEDED	The size of this object exceeds the maximum size set by the administrator.
0x8004016E CS_E_SCHEMA_MISMATCH	The schema for the software installation data in Active Directory does not match the required schema.
0x8004016F CS_E_INTERNAL_ERROR	An error occurred in the software installation data in Active Directory.
0x80040170 CACHE_E_NOCACHE_UPDATED	Cache not updated.
0x80040180 OLEOBJ_E_NOVERBS	No verbs for OLE object.
0x80040181 OLEOBJ_E_INVALIDVERB	Invalid verb for OLE object.
0x800401A0 INPLACE_E_NOTUNDOABLE	Undo is not available.
0x800401A1 INPLACE_E_NOTOOLSPACE	Space for tools is not available.
0x800401C0 CONVERT10_E_OLESTREAM_GET	OLESTREAM Get method failed.
0x800401C1 CONVERT10_E_OLESTREAM_PUT	OLESTREAM Put method failed.
0x800401C2 CONVERT10_E_OLESTREAM_FMT	Contents of the OLESTREAM not in correct format.
0x800401C3 CONVERT10_E_OLESTREAM_BITMAP_TO_DIB	There was an error in a Windows GDI call while converting the bitmap to a device-independent bitmap (DIB).
0x800401C4 CONVERT10_E_STG_FMT	Contents of the IStorage not in correct format.

<b>Return value/code</b>	<b>Description</b>
0x800401C5 CONVERT10_E_STG_NO_STD_STREAM	Contents of IStorage is missing one of the standard streams.
0x800401C6 CONVERT10_E_STG_DIB_TO_BITMAP	There was an error in a Windows Graphics Device Interface (GDI) call while converting the DIB to a bitmap.
0x800401D0 CLIPBRD_E_CANT_OPEN	OpenClipboard failed.
0x800401D1 CLIPBRD_E_CANT_EMPTY	EmptyClipboard failed.
0x800401D2 CLIPBRD_E_CANT_SET	SetClipboard failed.
0x800401D3 CLIPBRD_E_BAD_DATA	Data on clipboard is invalid.
0x800401D4 CLIPBRD_E_CANT_CLOSE	CloseClipboard failed.
0x800401E0 MK_E_CONNECTMANUALLY	Moniker needs to be connected manually.
0x800401E1 MK_E_EXCEEDEDDEADLINE	Operation exceeded deadline.
0x800401E2 MK_E_NEEDGENERIC	Moniker needs to be generic.
0x800401E3 MK_E_UNAVAILABLE	Operation unavailable.
0x800401E4 MK_E_SYNTAX	Invalid syntax.
0x800401E5 MK_E_NOOBJECT	No object for moniker.
0x800401E6 MK_E_INVALIDEXTENSION	Bad extension for file.
0x800401E7 MK_E_INTERMEDIATEINTERFACENOTSUPPORTED	Intermediate operation failed.
0x800401E8 MK_E_NOTBINDABLE	Moniker is not bindable.
0x800401E9 MK_E_NOTBOUND	Moniker is not bound.
0x800401EA MK_E_CANTOPENFILE	Moniker cannot open file.
0x800401EB	User input required for

<b>Return value/code</b>	<b>Description</b>
MK_E_MUSTBOTHERUSER	operation to succeed.
0x800401EC MK_E_NOINVERSE	Moniker class has no inverse.
0x800401ED MK_E_NOSTORAGE	Moniker does not refer to storage.
0x800401EE MK_E_NOPREFIX	No common prefix.
0x800401EF MK_E_ENUMERATION_FAILED	Moniker could not be enumerated.
0x800401F0 CO_E_NOTINITIALIZED	CoInitialize has not been called.
0x800401F1 CO_E_ALREADYINITIALIZED	CoInitialize has already been called.
0x800401F2 CO_E_CANTDETERMINECLASS	Class of object cannot be determined.
0x800401F3 CO_E_CLASSSTRING	Invalid class string.
0x800401F4 CO_E_IIDSTRING	Invalid interface string.
0x800401F5 CO_E_APPNOTFOUND	Application not found.
0x800401F6 CO_E_APPSINGLEUSE	Application cannot be run more than once.
0x800401F7 CO_E_ERRORINAPP	Some error in application.
0x800401F8 CO_E_DLLNOTFOUND	DLL for class not found.
0x800401F9 CO_E_ERRORINDLL	Error in the DLL.
0x800401FA CO_E_WRONGOSFORAPP	Wrong operating system or operating system version for application.
0x800401FB CO_E_OBJNOTREG	Object is not registered.
0x800401FC CO_E_OBJISREG	Object is already registered.
0x800401FD CO_E_OBJNOTCONNECTED	Object is not connected to server.
0x800401FE	Application was launched, but it

<b>Return value/code</b>	<b>Description</b>
CO_E_APPDIDNTREG	did not register a class factory.
0x800401FF CO_E_RELEASED	Object has been released.
0x80040201 EVENT_E_ALL_SUBSCRIBERS_FAILED	An event was unable to invoke any of the subscribers.
0x80040203 EVENT_E_QUERYSYNTAX	A syntax error occurred trying to evaluate a query string.
0x80040204 EVENT_E_QUERYFIELD	An invalid field name was used in a query string.
0x80040205 EVENT_E_INTERNALEXCEPTION	An unexpected exception was raised.
0x80040206 EVENT_E_INTERNALERROR	An unexpected internal error was detected.
0x80040207 EVENT_E_INVALID_PER_USER_SID	The owner security identifier (SID) on a per-user subscription does not exist.
0x80040208 EVENT_E_USER_EXCEPTION	A user-supplied component or subscriber raised an exception.
0x80040209 EVENT_E_TOO_MANY_METHODS	An interface has too many methods to fire events from.
0x8004020A EVENT_E_MISSING_EVENTCLASS	A subscription cannot be stored unless its event class already exists.
0x8004020B EVENT_E_NOT_ALL_REMOVED	Not all the objects requested could be removed.
0x8004020C EVENT_E_COMPLUS_NOT_INSTALLED	COM+ is required for this operation, but it is not installed.
0x8004020D EVENT_E_CANT_MODIFY_OR_DELETE_UNCONFIGURED_OBJECT	Cannot modify or delete an object that was not added using the COM+ Administrative SDK.
0x8004020E EVENT_E_CANT_MODIFY_OR_DELETE_CONFIGURED_OBJECT	Cannot modify or delete an object that was added using the COM+ Administrative SDK.
0x8004020F EVENT_E_INVALID_EVENT_CLASS_PARTITION	The event class for this subscription is in an invalid partition.
0x80040210 EVENT_E_PER_USER_SID_NOT_LOGGED_ON	The owner of the PerUser subscription is not logged on to the system specified.
0x80041309 SCHED_E_TRIGGER_NOT_FOUND	Trigger not found.
0x8004130A	One or more of the properties

<b>Return value/code</b>	<b>Description</b>
SCHED_E_TASK_NOT_READY	that are needed to run this task have not been set.
0x8004130B SCHED_E_TASK_NOT_RUNNING	There is no running instance of the task.
0x8004130C SCHED_E_SERVICE_NOT_INSTALLED	The Task Scheduler service is not installed on this computer.
0x8004130D SCHED_E_CANNOT_OPEN_TASK	The task object could not be opened.
0x8004130E SCHED_E_INVALID_TASK	The object is either an invalid task object or is not a task object.
0x8004130F SCHED_E_ACCOUNT_INFORMATION_NOT_SET	No account information could be found in the Task Scheduler security database for the task indicated.
0x80041310 SCHED_E_ACCOUNT_NAME_NOT_FOUND	Unable to establish existence of the account specified.
0x80041311 SCHED_E_ACCOUNT_DBASE_CORRUPT	Corruption was detected in the Task Scheduler security database; the database has been reset.
0x80041312 SCHED_E_NO_SECURITY_SERVICES	Task Scheduler security services are available only on Windows NT operating system.
0x80041313 SCHED_E_UNKNOWN_OBJECT_VERSION	The task object version is either unsupported or invalid.
0x80041314 SCHED_E_UNSUPPORTED_ACCOUNT_OPTION	The task has been configured with an unsupported combination of account settings and run-time options.
0x80041315 SCHED_E_SERVICE_NOT_RUNNING	The Task Scheduler service is not running.
0x80041316 SCHED_E_UNEXPECTEDNODE	The task XML contains an unexpected node.
0x80041317 SCHED_E_NAMESPACE	The task XML contains an element or attribute from an unexpected namespace.
0x80041318 SCHED_E_INVALIDVALUE	The task XML contains a value that is incorrectly formatted or out of range.
0x80041319 SCHED_E_MISSINGNODE	The task XML is missing a required element or attribute.
0x8004131A SCHED_E_MALFORMEDXML	The task XML is malformed.

Return value/code	Description
0x8004131D SCHED_E_TOO_MANY_NODES	The task XML contains too many nodes of the same type.
0x8004131E SCHED_E_PAST_END_BOUNDARY	The task cannot be started after the trigger's end boundary.
0x8004131F SCHED_E_ALREADY_RUNNING	An instance of this task is already running.
0x80041320 SCHED_E_USER_NOT_LOGGED_ON	The task will not run because the user is not logged on.
0x80041321 SCHED_E_INVALID_TASK_HASH	The task image is corrupt or has been tampered with.
0x80041322 SCHED_E_SERVICE_NOT_AVAILABLE	The Task Scheduler service is not available.
0x80041323 SCHED_E_SERVICE_TOO_BUSY	The Task Scheduler service is too busy to handle your request. Try again later.
0x80041324 SCHED_E_TASK_ATTEMPTED	The Task Scheduler service attempted to run the task, but the task did not run due to one of the constraints in the task definition.
0x8004D000 XACT_E_ALREADYOTHERSINGLEPHASE	Another single phase resource manager has already been enlisted in this transaction.
0x8004D001 XACT_E_CANTRETAIN	A retaining commit or abort is not supported.
0x8004D002 XACT_E_COMMITFAILED	The transaction failed to commit for an unknown reason. The transaction was aborted.
0x8004D003 XACT_E_COMMITPREVENTED	Cannot call commit on this transaction object because the calling application did not initiate the transaction.
0x8004D004 XACT_E_HEURISTICABORT	Instead of committing, the resource heuristically aborted.
0x8004D005 XACT_E_HEURISTICCOMMIT	Instead of aborting, the resource heuristically committed.
0x8004D006 XACT_E_HEURISTICDAMAGE	Some of the states of the resource were committed while others were aborted, likely because of heuristic decisions.
0x8004D007 XACT_E_HEURISTICDANGER	Some of the states of the resource <del>may</del> <u>might</u> have been committed while others <del>may</del> <u>have been</u> <del>were</del> aborted, likely

Return value/code	Description
	because of heuristic decisions.
0x8004D008 XACT_E_ISOLATIONLEVEL	The requested isolation level is not valid or supported.
0x8004D009 XACT_E_NOASYNC	The transaction manager does not support an asynchronous operation for this method.
0x8004D00A XACT_E_NOENLIST	Unable to enlist in the transaction.
0x8004D00B XACT_E_NOISORETAIN	The requested semantics of retention of isolation across retaining commit and abort boundaries cannot be supported by this transaction implementation, or <b>isoFlags</b> was not equal to 0.
0x8004D00C XACT_E_NORESOURCE	There is no resource presently associated with this enlistment.
0x8004D00D XACT_E_NOTCURRENT	The transaction failed to commit due to the failure of optimistic concurrency control in at least one of the resource managers.
0x8004D00E XACT_E_NOTTRANSACTION	The transaction has already been implicitly or explicitly committed or aborted.
0x8004D00F XACT_E_NOTSUPPORTED	An invalid combination of flags was specified.
0x8004D010 XACT_E_UNKNOWNRMGRID	The resource manager ID is not associated with this transaction or the transaction manager.
0x8004D011 XACT_E_WRONGSTATE	This method was called in the wrong state.
0x8004D012 XACT_E_WRONGUOW	The indicated unit of work does not match the unit of work expected by the resource manager.
0x8004D013 XACT_E_XTIONEXISTS	An enlistment in a transaction already exists.
0x8004D014 XACT_E_NOIMPORTOBJECT	An import object for the transaction could not be found.
0x8004D015 XACT_E_INVALIDCOOKIE	The transaction cookie is invalid.
0x8004D016 XACT_E_INDOUBT	The transaction status is in doubt. A communication failure occurred, or a transaction manager or resource manager

Return value/code	Description
	has failed.
0x8004D017 XACT_E_NOTIMEOUT	A time-out was specified, but time-outs are not supported.
0x8004D018 XACT_E_ALREADYINPROGRESS	The requested operation is already in progress for the transaction.
0x8004D019 XACT_E_ABORTED	The transaction has already been aborted.
0x8004D01A XACT_E_LOGFULL	The Transaction Manager returned a log full error.
0x8004D01B XACT_E_TMNOTAVAILABLE	The transaction manager is not available.
0x8004D01C XACT_E_CONNECTION_DOWN	A connection with the transaction manager was lost.
0x8004D01D XACT_E_CONNECTION_DENIED	A request to establish a connection with the transaction manager was denied.
0x8004D01E XACT_E_REENLISTTIMEOUT	Resource manager reenlistment to determine transaction status timed out.
0x8004D01F XACT_E_TIP_CONNECT_FAILED	The transaction manager failed to establish a connection with another Transaction Internet Protocol (TIP) transaction manager.
0x8004D020 XACT_E_TIP_PROTOCOL_ERROR	The transaction manager encountered a protocol error with another TIP transaction manager.
0x8004D021 XACT_E_TIP_PULL_FAILED	The transaction manager could not propagate a transaction from another TIP transaction manager.
0x8004D022 XACT_E_DEST_TMNOTAVAILABLE	The transaction manager on the destination machine is not available.
0x8004D023 XACT_E_TIP_DISABLED	The transaction manager has disabled its support for TIP.
0x8004D024 XACT_E_NETWORK_TX_DISABLED	The transaction manager has disabled its support for remote or network transactions.
0x8004D025 XACT_E_PARTNER_NETWORK_TX_DISABLED	The partner transaction manager has disabled its support for remote or network transactions.

Return value/code	Description
0x8004D026 XACT_E_XA_TX_DISABLED	The transaction manager has disabled its support for XA transactions.
0x8004D027 XACT_E_UNABLE_TO_READ_DTC_CONFIG	Microsoft Distributed Transaction Coordinator (MSDTC) was unable to read its configuration information.
0x8004D028 XACT_E_UNABLE_TO_LOAD_DTC_PROXY	MSDTC was unable to load the DTC proxy DLL.
0x8004D029 XACT_E_ABORTING	The local transaction has aborted.
0x8004D080 XACT_E_CLERKNOTFOUND	The specified CRM clerk was not found. It <b>may</b> have completed before it could be held.
0x8004D081 XACT_E_CLERKEXISTS	The specified CRM clerk does not exist.
0x8004D082 XACT_E_RECOVERYINPROGRESS	Recovery of the CRM log file is still in progress.
0x8004D083 XACT_E_TRANSACTIONCLOSED	The transaction has completed, and the log records have been discarded from the log file. They are no longer available.
0x8004D084 XACT_E_INVALIDLSN	IsnToRead is outside of the current limits of the log
0x8004D085 XACT_E_REPLAYREQUEST	The COM+ Compensating Resource Manager has records it wishes to replay.
0x8004D100 XACT_E_CONNECTION_REQUEST_DENIED	The request to connect to the specified transaction coordinator was denied.
0x8004D101 XACT_E_TOOMANY_ENLISTMENTS	The maximum number of enlistments for the specified transaction has been reached.
0x8004D102 XACT_E_DUPLICATE_GUID	A resource manager with the same identifier is already registered with the specified transaction coordinator.
0x8004D103 XACT_E_NOTSINGLEPHASE	The prepare request given was not eligible for single-phase optimizations.
0x8004D104 XACT_E_RECOVERYALREADYDONE	RecoveryComplete has already been called for the given resource manager.
0x8004D105 XACT_E_PROTOCOL	The interface call made was incorrect for the current state of

Return value/code	Description
	the protocol.
0x8004D106 XACT_E_RM_FAILURE	The xa_open call failed for the XA resource.
0x8004D107 XACT_E_RECOVERY_FAILED	The xa_recover call failed for the XA resource.
0x8004D108 XACT_E_LU_NOT_FOUND	The logical unit of work specified cannot be found.
0x8004D109 XACT_E_DUPLICATE_LU	The specified logical unit of work already exists.
0x8004D10A XACT_E_LU_NOT_CONNECTED	Subordinate creation failed. The specified logical unit of work was not connected.
0x8004D10B XACT_E_DUPLICATE_TRANSID	A transaction with the given identifier already exists.
0x8004D10C XACT_E_LU_BUSY	The resource is in use.
0x8004D10D XACT_E_LU_NO_RECOVERY_PROCESS	The LU Recovery process is down.
0x8004D10E XACT_E_LU_DOWN	The remote session was lost.
0x8004D10F XACT_E_LU_RECOVERING	The resource is currently recovering.
0x8004D110 XACT_E_LU_RECOVERY_MISMATCH	There was a mismatch in driving recovery.
0x8004D111 XACT_E_RM_UNAVAILABLE	An error occurred with the XA resource.
0x8004E002 CONTEXT_E_ABORTED	The root transaction wanted to commit, but the transaction aborted.
0x8004E003 CONTEXT_E_ABORTING	The COM+ component on which the method call was made has a transaction that has already aborted or is in the process of aborting.
0x8004E004 CONTEXT_E_NOCONTEXT	There is no Microsoft Transaction Server (MTS) object context.
0x8004E005 CONTEXT_E_WOULD_DEADLOCK	The component is configured to use synchronization, and this method call would cause a deadlock to occur.
0x8004E006	The component is configured to use synchronization, and a

<b>Return value/code</b>	<b>Description</b>
CONTEXT_E_SYNCH_TIMEOUT	thread has timed out waiting to enter the context.
0x8004E007 CONTEXT_E_OLDREF	You made a method call on a COM+ component that has a transaction that has already committed or aborted.
0x8004E00C CONTEXT_E_ROLENOTFOUND	The specified role was not configured for the application.
0x8004E00F CONTEXT_E_TMNOTAVAILABLE	COM+ was unable to talk to the MSDTC.
0x8004E021 CO_E_ACTIVATIONFAILED	An unexpected error occurred during COM+ activation.
0x8004E022 CO_E_ACTIVATIONFAILED_EVENTLOGGED	COM+ activation failed. Check the event log for more information.
0x8004E023 CO_E_ACTIVATIONFAILED_CATALOGERROR	COM+ activation failed due to a catalog or configuration error.
0x8004E024 CO_E_ACTIVATIONFAILED_TIMEOUT	COM+ activation failed because the activation could not be completed in the specified amount of time.
0x8004E025 CO_E_INITIALIZATIONFAILED	COM+ activation failed because an initialization function failed. Check the event log for more information.
0x8004E026 CONTEXT_E_NOJIT	The requested operation requires that just-in-time (JIT) be in the current context, and it is not.
0x8004E027 CONTEXT_E_NOTTRANSACTION	The requested operation requires that the current context have a transaction, and it does not.
0x8004E028 CO_E_THREADINGMODEL_CHANGED	The components threading model has changed after install into a COM+ application. Re-install component.
0x8004E029 CO_E_NOIISINTRINSICS	Internet Information Services (IIS) intrinsics not available. Start your work with IIS.
0x8004E02A CO_E_NOCOOKIES	An attempt to write a cookie failed.
0x8004E02B CO_E_DBERROR	An attempt to use a database generated a database-specific error.
0x8004E02C	The COM+ component you created must use object pooling

Return value/code	Description
CO_E_NOTPOOLED	to work.
0x8004E02D CO_E_NOTCONSTRUCTED	The COM+ component you created must use object construction to work correctly.
0x8004E02E CO_E_NOSYNCHRONIZATION	The COM+ component requires synchronization, and it is not configured for it.
0x8004E02F CO_E_ISOLEVELMISMATCH	The TxIsolation Level property for the COM+ component being created is stronger than the TxIsolationLevel for the root.
0x8004E030 CO_E_CALL_OUT_OF_TX_SCOPE_NOT_ALLOWED	The component attempted to make a cross-context call between invocations of EnterTransactionScope and ExitTransactionScope. This is not allowed. Cross-context calls cannot be made while inside a transaction scope.
0x8004E031 CO_E_EXIT_TRANSACTION_SCOPE_NOT_CALLED	The component made a call to EnterTransactionScope, but did not make a corresponding call to ExitTransactionScope before returning.
0x80070005 E_ACCESSDENIED	General access denied error.
0x8007000E E_OUTOFMEMORY	The server does not have enough memory for the new channel.
0x80070032 ERROR_NOT_SUPPORTED	The server cannot support a client request for a dynamic virtual channel.
0x80070057 E_INVALIDARG	One or more arguments are invalid.
<a href="#">0x80070070</a> <a href="#">ERROR_DISK_FULL</a>	<a href="#">There is not enough space on the disk.</a>
0x80080001 CO_E_CLASS_CREATE_FAILED	Attempt to create a class object failed.
0x80080002 CO_E_SCM_ERROR	OLE service could not bind object.
0x80080003 CO_E_SCM_RPC_FAILURE	RPC communication failed with OLE service.
0x80080004 CO_E_BAD_PATH	Bad path to object.
0x80080005	Server execution failed.

<b>Return value/code</b>	<b>Description</b>
CO_E_SERVER_EXEC_FAILURE	
0x80080006 CO_E_OBJSRV_RPC_FAILURE	OLE service could not communicate with the object server.
0x80080007 MK_E_NO_NORMALIZED	Moniker path could not be normalized.
0x80080008 CO_E_SERVER_STOPPING	Object server is stopping when OLE service contacts it.
0x80080009 MEM_E_INVALID_ROOT	An invalid root block pointer was specified.
0x80080010 MEM_E_INVALID_LINK	An allocation chain contained an invalid link pointer.
0x80080011 MEM_E_INVALID_SIZE	The requested allocation size was too large.
0x80080015 CO_E_MISSING_DISPLAYNAME	The activation requires a display name to be present under the class identifier (CLSID) key.
0x80080016 CO_E_RUNAS_VALUE_MUST_BE_AAA	The activation requires that the RunAs value for the application is Activate As Activator.
0x80080017 CO_E_ELEVATION_DISABLED	The class is not configured to support elevated activation.
0x80090001 NTE_BAD_UID	Bad UID.
0x80090002 NTE_BAD_HASH	Bad hash.
0x80090003 NTE_BAD_KEY	Bad key.
0x80090004 NTE_BAD_LEN	Bad length.
0x80090005 NTE_BAD_DATA	Bad data.
0x80090006 NTE_BAD_SIGNATURE	Invalid signature.
0x80090007 NTE_BAD_VER	Bad version of provider.
0x80090008 NTE_BAD_ALGID	Invalid algorithm specified.
0x80090009 NTE_BAD_FLAGS	Invalid flags specified.

<b>Return value/code</b>	<b>Description</b>
0x8009000A NTE_BAD_TYPE	Invalid type specified.
0x8009000B NTE_BAD_KEY_STATE	Key not valid for use in specified state.
0x8009000C NTE_BAD_HASH_STATE	Hash not valid for use in specified state.
0x8009000D NTE_NO_KEY	Key does not exist.
0x8009000E NTE_NO_MEMORY	Insufficient memory available for the operation.
0x8009000F NTE_EXISTS	Object already exists.
0x80090010 NTE_PERM	Access denied.
0x80090011 NTE_NOT_FOUND	Object was not found.
0x80090012 NTE_DOUBLE_ENCRYPT	Data already encrypted.
0x80090013 NTE_BAD_PROVIDER	Invalid provider specified.
0x80090014 NTE_BAD_PROV_TYPE	Invalid provider type specified.
0x80090015 NTE_BAD_PUBLIC_KEY	Provider's public key is invalid.
0x80090016 NTE_BAD_KEYSET	Key set does not exist.
0x80090017 NTE_PROV_TYPE_NOT_DEF	Provider type not defined.
0x80090018 NTE_PROV_TYPE_ENTRY_BAD	The provider type, as registered, is invalid.
0x80090019 NTE_KEYSET_NOT_DEF	The key set is not defined.
0x8009001A NTE_KEYSET_ENTRY_BAD	The key set, as registered, is invalid.
0x8009001B NTE_PROV_TYPE_NO_MATCH	Provider type does not match registered value.
0x8009001C NTE_SIGNATURE_FILE_BAD	The digital signature file is corrupt.

<b>Return value/code</b>	<b>Description</b>
0x8009001D NTE_PROVIDER_DLL_FAIL	Provider DLL failed to initialize correctly.
0x8009001E NTE_PROV_DLL_NOT_FOUND	Provider DLL could not be found.
0x8009001F NTE_BAD_KEYSET_PARAM	The <i>keyset</i> parameter is invalid.
0x80090020 NTE_FAIL	An internal error occurred.
0x80090021 NTE_SYS_ERR	A base error occurred.
0x80090022 NTE_SILENT_CONTEXT	Provider could not perform the action because the context was acquired as silent.
0x80090023 NTE_TOKEN_KEYSET_STORAGE_FULL	The security token does not have storage space available for an additional container.
0x80090024 NTE_TEMPORARY_PROFILE	The profile for the user is a temporary profile.
0x80090025 NTE_FIXEDPARAMETER	The key parameters could not be set because the configuration service provider (CSP) uses fixed parameters.
0x80090026 NTE_INVALID_HANDLE	The supplied handle is invalid.
0x80090027 NTE_INVALID_PARAMETER	The parameter is incorrect.
0x80090028 NTE_BUFFER_TOO_SMALL	The buffer supplied to a function was too small.
0x80090029 NTE_NOT_SUPPORTED	The requested operation is not supported.
0x8009002A NTE_NO_MORE_ITEMS	No more data is available.
0x8009002B NTE_BUFFERS_OVERLAP	The supplied buffers overlap incorrectly.
0x8009002C NTE_DECRYPTION_FAILURE	The specified data could not be decrypted.
0x8009002D NTE_INTERNAL_ERROR	An internal consistency check failed.
0x8009002E NTE_UI_REQUIRED	This operation requires input from the user.

<b>Return value/code</b>	<b>Description</b>
0x8009002F NTE_HMAC_NOT_SUPPORTED	The cryptographic provider does not support Hash Message Authentication Code (HMAC).
0x80090300 SEC_E_INSUFFICIENT_MEMORY	Not enough memory is available to complete this request.
0x80090301 SEC_E_INVALID_HANDLE	The handle specified is invalid.
0x80090302 SEC_E_UNSUPPORTED_FUNCTION	The function requested is not supported.
0x80090303 SEC_E_TARGET_UNKNOWN	The specified target is unknown or unreachable.
0x80090304 SEC_E_INTERNAL_ERROR	The Local Security Authority (LSA) cannot be contacted.
0x80090305 SEC_E_SECPKG_NOT_FOUND	The requested security package does not exist.
0x80090306 SEC_E_NOT_OWNER	The caller is not the owner of the desired credentials.
0x80090307 SEC_E_CANNOT_INSTALL	The security package failed to initialize and cannot be installed.
0x80090308 SEC_E_INVALID_TOKEN	The token supplied to the function is invalid.
0x80090309 SEC_E_CANNOT_PACK	The security package is not able to marshal the logon buffer, so the logon attempt has failed.
0x8009030A SEC_E_QOP_NOT_SUPPORTED	The per-message quality of protection is not supported by the security package.
0x8009030B SEC_E_NO_IMPERSONATION	The security context does not allow impersonation of the client.
0x8009030C SEC_E_LOGON_DENIED	The logon attempt failed.
0x8009030D SEC_E_UNKNOWN_CREDENTIALS	The credentials supplied to the package were not recognized.
0x8009030E SEC_E_NO_CREDENTIALS	No credentials are available in the security package.
0x8009030F SEC_E_MESSAGE_ALTERED	The message or signature supplied for verification has been altered.
0x80090310 SEC_E_OUT_OF_SEQUENCE	The message supplied for verification is out of sequence.

<b>Return value/code</b>	<b>Description</b>
0x80090311 SEC_E_NO_AUTHENTICATING_AUTHORITY	No authority could be contacted for authentication.
0x80090316 SEC_E_BAD_PKGID	The requested security package does not exist.
0x80090317 SEC_E_CONTEXT_EXPIRED	The context has expired and can no longer be used.
0x80090318 SEC_E_INCOMPLETE_MESSAGE	The supplied message is incomplete. The signature was not verified.
0x80090320 SEC_E_INCOMPLETE_CREDENTIALS	The credentials supplied were not complete and could not be verified. The context could not be initialized.
0x80090321 SEC_E_BUFFER_TOO_SMALL	The buffers supplied to a function was too small.
0x80090322 SEC_E_WRONG_PRINCIPAL	The target principal name is incorrect.
0x80090324 SEC_E_TIME_SKEW	The clocks on the client and server machines are skewed.
0x80090325 SEC_E_UNTRUSTED_ROOT	The certificate chain was issued by an authority that is not trusted.
0x80090326 SEC_E_ILLEGAL_MESSAGE	The message received was unexpected or badly formatted.
0x80090327 SEC_E_CERT_UNKNOWN	An unknown error occurred while processing the certificate.
0x80090328 SEC_E_CERT_EXPIRED	The received certificate has expired.
0x80090329 SEC_E_ENCRYPT_FAILURE	The specified data could not be encrypted.
0x80090330 SEC_E_DECRYPT_FAILURE	The specified data could not be decrypted.
0x80090331 SEC_E_ALGORITHM_MISMATCH	The client and server cannot communicate because they do not possess a common algorithm.
0x80090332 SEC_E_SECURITY_QOS_FAILED	The security context could not be established due to a failure in the requested quality of service (for example, mutual authentication or delegation).
0x80090333 SEC_E_UNFINISHED_CONTEXT_DELETED	A security context was deleted before the context was

<b>Return value/code</b>	<b>Description</b>
	completed. This is considered a logon failure.
0x80090334 SEC_E_NO_TGT_REPLY	The client is trying to negotiate a context and the server requires user-to-user but did not send a ticket granting ticket (TGT) reply.
0x80090335 SEC_E_NO_IP_ADDRESSES	Unable to accomplish the requested task because the local machine does not have an IP addresses.
0x80090336 SEC_E_WRONG_CREDENTIAL_HANDLE	The supplied credential handle does not match the credential associated with the security context.
0x80090337 SEC_E_CRYPTO_SYSTEM_INVALID	The cryptographic system or checksum function is invalid because a required function is unavailable.
0x80090338 SEC_E_MAX_REFERRALS_EXCEEDED	The number of maximum ticket referrals has been exceeded.
0x80090339 SEC_E_MUST_BE_KDC	The local machine must be a Kerberos domain controller (KDC), and it is not.
0x8009033A SEC_E_STRONG_CRYPTO_NOT_SUPPORTED	The other end of the security negotiation requires strong cryptographics, but it is not supported on the local machine.
0x8009033B SEC_E_TOO_MANY_PRINCIPALS	The KDC reply contained more than one principal name.
0x8009033C SEC_E_NO_PA_DATA	Expected to find PA data for a hint of what etype to use, but it was not found.
0x8009033D SEC_E_PKINIT_NAME_MISMATCH	The client certificate does not contain a valid user principal name (UPN), or does not match the client name in the logon request. Contact your administrator.
0x8009033E SEC_E_SMARTCARD_LOGON_REQUIRED	Smart card logon is required and was not used.
0x8009033F SEC_E_SHUTDOWN_IN_PROGRESS	A system shutdown is in progress.
0x80090340 SEC_E_KDC_INVALID_REQUEST	An invalid request was sent to the KDC.
0x80090341 SEC_E_KDC_UNABLE_TO_REFER	The KDC was unable to generate a referral for the

Return value/code	Description
	service requested.
0x80090342 SEC_E_KDC_UNKNOWN_ETYPE	The encryption type requested is not supported by the KDC.
0x80090343 SEC_E_UNSUPPORTED_PREAUTH	An unsupported pre-authentication mechanism was presented to the Kerberos package.
0x80090345 SEC_E_DELEGATION_REQUIRED	The requested operation cannot be completed. The computer must be trusted for delegation, and the current user account must be configured to allow delegation.
0x80090346 SEC_E_BAD_BINDINGS	Client's supplied Security Support Provider Interface (SSPI) channel bindings were incorrect.
0x80090347 SEC_E_MULTIPLE_ACCOUNTS	The received certificate was mapped to multiple accounts.
0x80090348 SEC_E_NO_KERB_KEY	No Kerberos key was found.
0x80090349 SEC_E_CERT_WRONG_USAGE	The certificate is not valid for the requested usage.
0x80090350 SEC_E_DOWNGRADE_DETECTED	The system detected a possible attempt to compromise security. Ensure that you can contact the server that authenticated you.
0x80090351 SEC_E_SMARTCARD_CERT_REVOKED	The smart card certificate used for authentication has been revoked. Contact your system administrator. The event log <b>may</b> contain additional information.
0x80090352 SEC_E_ISSUING_CA_UNTRUSTED	An untrusted certification authority (CA) was detected while processing the smart card certificate used for authentication. Contact your system administrator.
0x80090353 SEC_E_REVOCATION_OFFLINE_C	The revocation status of the smart card certificate used for authentication could not be determined. Contact your system administrator.
0x80090354 SEC_E_PKINIT_CLIENT_FAILURE	The smart card certificate used for authentication was not trusted. Contact your system administrator.

Return value/code	Description
0x80090355 SEC_E_SMARTCARD_CERT_EXPIRED	The smart card certificate used for authentication has expired. Contact your system administrator.
0x80090356 SEC_E_NO_S4U_PROT_SUPPORT	The Kerberos subsystem encountered an error. A service for user protocol requests was made against a domain controller that does not support services for users.
0x80090357 SEC_E_CROSSREALM_DELEGATION_FAILURE	An attempt was made by this server to make a Kerberos-constrained delegation request for a target outside the server's realm. This is not supported and indicates a misconfiguration on this server's allowed-to-delegate-to list. Contact your administrator.
0x80090358 SEC_E_REVOCATION_OFFLINE_KDC	The revocation status of the domain controller certificate used for smart card authentication could not be determined. The system event log contains additional information. Contact your system administrator.
0x80090359 SEC_E_ISSUING_CA_UNTRUSTED_KDC	An untrusted CA was detected while processing the domain controller certificate used for authentication. The system event log contains additional information. Contact your system administrator.
0x8009035A SEC_E_KDC_CERT_EXPIRED	The domain controller certificate used for smart card logon has expired. Contact your system administrator with the contents of your system event log.
0x8009035B SEC_E_KDC_CERT_REVOKED	The domain controller certificate used for smart card logon has been revoked. Contact your system administrator with the contents of your system event log.
0x8009035D SEC_E_INVALID_PARAMETER	One or more of the parameters passed to the function were invalid.
0x8009035E SEC_E_DELEGATION_POLICY	The client policy does not allow credential delegation to the target server.
0x8009035F SEC_E_POLICY_NLTM_ONLY	The client policy does not allow credential delegation to the target server with NLTM only

Return value/code	Description
	authentication.
0x80091001 CRYPT_E_MSG_ERROR	An error occurred while performing an operation on a cryptographic message.
0x80091002 CRYPT_E_UNKNOWN_ALGO	Unknown cryptographic algorithm.
0x80091003 CRYPT_E_OID_FORMAT	The object identifier is poorly formatted.
0x80091004 CRYPT_E_INVALID_MSG_TYPE	Invalid cryptographic message type.
0x80091005 CRYPT_E_UNEXPECTED_ENCODING	Unexpected cryptographic message encoding.
0x80091006 CRYPT_E_AUTH_ATTR_MISSING	The cryptographic message does not contain an expected authenticated attribute.
0x80091007 CRYPT_E_HASH_VALUE	The hash value is not correct.
0x80091008 CRYPT_E_INVALID_INDEX	The index value is not valid.
0x80091009 CRYPT_E_ALREADY_DECRYPTED	The content of the cryptographic message has already been decrypted.
0x8009100A CRYPT_E_NOT_DECRYPTED	The content of the cryptographic message has not been decrypted yet.
0x8009100B CRYPT_E_RECIPIENT_NOT_FOUND	The enveloped-data message does not contain the specified recipient.
0x8009100C CRYPT_E_CONTROL_TYPE	Invalid control type.
0x8009100D CRYPT_E_ISSUER_SERIALNUMBER	Invalid issuer or serial number.
0x8009100E CRYPT_E_SIGNER_NOT_FOUND	Cannot find the original signer.
0x8009100F CRYPT_E_ATTRIBUTES_MISSING	The cryptographic message does not contain all of the requested attributes.
0x80091010 CRYPT_E_STREAM_MSG_NOT_READY	The streamed cryptographic message is not ready to return data.
0x80091011 CRYPT_E_STREAM_INSUFFICIENT_DATA	The streamed cryptographic message requires more data to complete the decode operation.

<b>Return value/code</b>	<b>Description</b>
0x80092001 CRYPT_E_BAD_LEN	The length specified for the output data was insufficient.
0x80092002 CRYPT_E_BAD_ENCODE	An error occurred during the encode or decode operation.
0x80092003 CRYPT_E_FILE_ERROR	An error occurred while reading or writing to a file.
0x80092004 CRYPT_E_NOT_FOUND	Cannot find object or property.
0x80092005 CRYPT_E_EXISTS	The object or property already exists.
0x80092006 CRYPT_E_NO_PROVIDER	No provider was specified for the store or object.
0x80092007 CRYPT_E_SELF_SIGNED	The specified certificate is self-signed.
0x80092008 CRYPT_E_DELETED_PREV	The previous certificate or certificate revocation list (CRL) context was deleted.
0x80092009 CRYPT_E_NO_MATCH	Cannot find the requested object.
0x8009200A CRYPT_E_UNEXPECTED_MSG_TYPE	The certificate does not have a property that references a private key.
0x8009200B CRYPT_E_NO_KEY_PROPERTY	Cannot find the certificate and private key for decryption.
0x8009200C CRYPT_E_NO_DECRYPT_CERT	Cannot find the certificate and private key to use for decryption.
0x8009200D CRYPT_E_BAD_MSG	Not a cryptographic message or the cryptographic message is not formatted correctly.
0x8009200E CRYPT_E_NO_SIGNER	The signed cryptographic message does not have a signer for the specified signer index.
0x8009200F CRYPT_E_PENDING_CLOSE	Final closure is pending until additional frees or closes.
0x80092010 CRYPT_E_REVOKED	The certificate is revoked.
0x80092011 CRYPT_E_NO_REVOCATION_DLL	No DLL or exported function was found to verify revocation.
0x80092012 CRYPT_E_NO_REVOCATION_CHECK	The revocation function was unable to check revocation for the certificate.

<b>Return value/code</b>	<b>Description</b>
0x80092013 CRYPT_E_REVOCATION_OFFLINE	The revocation function was unable to check revocation because the revocation server was offline.
0x80092014 CRYPT_E_NOT_IN_REVOCATION_DATABASE	The certificate is not in the revocation server's database.
0x80092020 CRYPT_E_INVALID_NUMERIC_STRING	The string contains a non-numeric character.
0x80092021 CRYPT_E_INVALID_PRINTABLE_STRING	The string contains a nonprintable character.
0x80092022 CRYPT_E_INVALID_IA5_STRING	The string contains a character not in the 7-bit ASCII character set.
0x80092023 CRYPT_E_INVALID_X500_STRING	The string contains an invalid X500 name attribute key, object identifier (OID), value, or delimiter.
0x80092024 CRYPT_E_NOT_CHAR_STRING	The dwValueType for the CERT_NAME_VALUE is not one of the character strings. Most likely it is either a CERT_RDN_ENCODED_BLOB or CERT_TDN_OCTED_STRING.
0x80092025 CRYPT_E_FILERESIZED	The Put operation cannot continue. The file needs to be resized. However, there is already a signature present. A complete signing operation must be done.
0x80092026 CRYPT_E_SECURITY_SETTINGS	The cryptographic operation failed due to a local security option setting.
0x80092027 CRYPT_E_NO_VERIFY_USAGE_DLL	No DLL or exported function was found to verify subject usage.
0x80092028 CRYPT_E_NO_VERIFY_USAGE_CHECK	The called function was unable to perform a usage check on the subject.
0x80092029 CRYPT_E_VERIFY_USAGE_OFFLINE	The called function was unable to complete the usage check because the server was offline.
0x8009202A CRYPT_E_NOT_IN_CTL	The subject was not found in a certificate trust list (CTL).
0x8009202B CRYPT_E_NO_TRUSTED_SIGNER	None of the signers of the cryptographic message or certificate trust list is trusted.
0x8009202C	The public key's algorithm

<b>Return value/code</b>	<b>Description</b>
CRYPT_E_MISSING_PUBKEY_PARA	parameters are missing.
0x80093000 CRYPT_E_OSS_ERROR	OSS Certificate encode/decode error code base.
0x80093001 OSS_MORE_BUF	OSS ASN.1 Error: Output Buffer is too small.
0x80093002 OSS_NEGATIVE_UIINTEGER	OSS ASN.1 Error: Signed integer is encoded as a unsigned integer.
0x80093003 OSS_PDU_RANGE	OSS ASN.1 Error: Unknown ASN.1 data type.
0x80093004 OSS_MORE_INPUT	OSS ASN.1 Error: Output buffer is too small; the decoded data has been truncated.
0x80093005 OSS_DATA_ERROR	OSS ASN.1 Error: Invalid data.
0x80093006 OSS_BAD_ARG	OSS ASN.1 Error: Invalid argument.
0x80093007 OSS_BAD_VERSION	OSS ASN.1 Error: Encode/Decode version mismatch.
0x80093008 OSS_OUT_MEMORY	OSS ASN.1 Error: Out of memory.
0x80093009 OSS_PDU_MISMATCH	OSS ASN.1 Error: Encode/Decode error.
0x8009300A OSS_LIMITED	OSS ASN.1 Error: Internal error.
0x8009300B OSS_BAD_PTR	OSS ASN.1 Error: Invalid data.
0x8009300C OSS_BAD_TIME	OSS ASN.1 Error: Invalid data.
0x8009300D OSS_INDEFINITE_NOT_SUPPORTED	OSS ASN.1 Error: Unsupported BER indefinite-length encoding.
0x8009300E OSS_MEM_ERROR	OSS ASN.1 Error: Access violation.
0x8009300F OSS_BAD_TABLE	OSS ASN.1 Error: Invalid data.
0x80093010 OSS_TOO_LONG	OSS ASN.1 Error: Invalid data.
0x80093011 OSS_CONSTRAINT_VIOLATED	OSS ASN.1 Error: Invalid data.

<b>Return value/code</b>	<b>Description</b>
0x80093012 OSS_FATAL_ERROR	OSS ASN.1 Error: Internal error.
0x80093013 OSS_ACCESS_SERIALIZATION_ERROR	OSS ASN.1 Error: Multithreading conflict.
0x80093014 OSS_NULL_TBL	OSS ASN.1 Error: Invalid data.
0x80093015 OSS_NULL_FCN	OSS ASN.1 Error: Invalid data.
0x80093016 OSS_BAD_ENCRULES	OSS ASN.1 Error: Invalid data.
0x80093017 OSS_UNAVAIL_ENCRULES	OSS ASN.1 Error: Encode/Decode function not implemented.
0x80093018 OSS_CANT_OPEN_TRACE_WINDOW	OSS ASN.1 Error: Trace file error.
0x80093019 OSS_UNIMPLEMENTED	OSS ASN.1 Error: Function not implemented.
0x8009301A OSS_OID_DLL_NOT_LINKED	OSS ASN.1 Error: Program link error.
0x8009301B OSS_CANT_OPEN_TRACE_FILE	OSS ASN.1 Error: Trace file error.
0x8009301C OSS_TRACE_FILE_ALREADY_OPEN	OSS ASN.1 Error: Trace file error.
0x8009301D OSS_TABLE_MISMATCH	OSS ASN.1 Error: Invalid data.
0x8009301E OSS_TYPE_NOT_SUPPORTED	OSS ASN.1 Error: Invalid data.
0x8009301F OSS_REAL_DLL_NOT_LINKED	OSS ASN.1 Error: Program link error.
0x80093020 OSS_REAL_CODE_NOT_LINKED	OSS ASN.1 Error: Program link error.
0x80093021 OSS_OUT_OF_RANGE	OSS ASN.1 Error: Program link error.
0x80093022 OSS_COPIER_DLL_NOT_LINKED	OSS ASN.1 Error: Program link error.
0x80093023 OSS_CONSTRAINT_DLL_NOT_LINKED	OSS ASN.1 Error: Program link error.
0x80093024 OSS_COMPARATOR_DLL_NOT_LINKED	OSS ASN.1 Error: Program link error.

<b>Return value/code</b>	<b>Description</b>
0x80093025 OSS_COMPARATOR_CODE_NOT_LINKED	OSS ASN.1 Error: Program link error.
0x80093026 OSS_MEM_MGR_DLL_NOT_LINKED	OSS ASN.1 Error: Program link error.
0x80093027 OSS_PDV_DLL_NOT_LINKED	OSS ASN.1 Error: Program link error.
0x80093028 OSS_PDV_CODE_NOT_LINKED	OSS ASN.1 Error: Program link error.
0x80093029 OSS_API_DLL_NOT_LINKED	OSS ASN.1 Error: Program link error.
0x8009302A OSS_BERDER_DLL_NOT_LINKED	OSS ASN.1 Error: Program link error.
0x8009302B OSS_PER_DLL_NOT_LINKED	OSS ASN.1 Error: Program link error.
0x8009302C OSS_OPEN_TYPE_ERROR	OSS ASN.1 Error: Program link error.
0x8009302D OSS_MUTEX_NOT_CREATED	OSS ASN.1 Error: System resource error.
0x8009302E OSS_CANT_CLOSE_TRACE_FILE	OSS ASN.1 Error: Trace file error.
0x80093100 CRYPT_E_ASN1_ERROR	ASN1 Certificate encode/decode error code base.
0x80093101 CRYPT_E_ASN1_INTERNAL	ASN1 internal encode or decode error.
0x80093102 CRYPT_E_ASN1_EOD	ASN1 unexpected end of data.
0x80093103 CRYPT_E_ASN1_CORRUPT	ASN1 corrupted data.
0x80093104 CRYPT_E_ASN1_LARGE	ASN1 value too large.
0x80093105 CRYPT_E_ASN1_CONSTRAINT	ASN1 constraint violated.
0x80093106 CRYPT_E_ASN1_MEMORY	ASN1 out of memory.
0x80093107 CRYPT_E_ASN1_OVERFLOW	ASN1 buffer overflow.
0x80093108 CRYPT_E_ASN1_BADPDU	ASN1 function not supported for this protocol data unit (PDU).

<b>Return value/code</b>	<b>Description</b>
0x80093109 CRYPT_E_ASN1_BADARGS	ASN1 bad arguments to function call.
0x8009310A CRYPT_E_ASN1_BADREAL	ASN1 bad real value.
0x8009310B CRYPT_E_ASN1_BADTAG	ASN1 bad tag value met.
0x8009310C CRYPT_E_ASN1_CHOICE	ASN1 bad choice value.
0x8009310D CRYPT_E_ASN1_RULE	ASN1 bad encoding rule.
0x8009310E CRYPT_E_ASN1_UTF8	ASN1 bad Unicode (UTF8).
0x80093133 CRYPT_E_ASN1_PDU_TYPE	ASN1 bad PDU type.
0x80093134 CRYPT_E_ASN1_NYI	ASN1 not yet implemented.
0x80093201 CRYPT_E_ASN1_EXTENDED	ASN1 skipped unknown extensions.
0x80093202 CRYPT_E_ASN1_NOEOD	ASN1 end of data expected.
0x80094001 CERTSRV_E_BAD_REQUESTSUBJECT	The request subject name is invalid or too long.
0x80094002 CERTSRV_E_NO_REQUEST	The request does not exist.
0x80094003 CERTSRV_E_BAD_REQUESTSTATUS	The request's current status does not allow this operation.
0x80094004 CERTSRV_E_PROPERTY_EMPTY	The requested property value is empty.
0x80094005 CERTSRV_E_INVALID_CA_CERTIFICATE	The CA's certificate contains invalid data.
0x80094006 CERTSRV_E_SERVER_SUSPENDED	Certificate service has been suspended for a database restore operation.
0x80094007 CERTSRV_E_ENCODING_LENGTH	The certificate contains an encoded length that is potentially incompatible with older enrollment software.
0x80094008 CERTSRV_E_ROLECONFLICT	The operation is denied. The user has multiple roles assigned, and the CA is configured to enforce role

Return value/code	Description
	separation.
0x80094009 CERTSRV_E_RESTRICTEDOFFICER	The operation is denied. It can only be performed by a certificate manager that is allowed to manage certificates for the current requester.
0x8009400A CERTSRV_E_KEY_ARCHIVAL_NOT_CONFIGURED	Cannot archive private key. The CA is not configured for key archival.
0x8009400B CERTSRV_E_NO_VALID_KRA	Cannot archive private key. The CA could not verify one or more key recovery certificates.
0x8009400C CERTSRV_E_BAD_REQUEST_KEY_ARCHIVAL	The request is incorrectly formatted. The encrypted private key must be in an unauthenticated attribute in an outermost signature.
0x8009400D CERTSRV_E_NO_CAADMIN_DEFINED	At least one security principal must have the permission to manage this CA.
0x8009400E CERTSRV_E_BAD_RENEWAL_CERT_ATTRIBUTE	The request contains an invalid renewal certificate attribute.
0x8009400F CERTSRV_E_NO_DB_SESSIONS	An attempt was made to open a CA database session, but there are already too many active sessions. The server <del>may</del> <b>needs</b> to be configured to allow additional sessions.
0x80094010 CERTSRV_E_ALIGNMENT_FAULT	A memory reference caused a data alignment fault.
0x80094011 CERTSRV_E_ENROLL_DENIED	The permissions on this CA do not allow the current user to enroll for certificates.
0x80094012 CERTSRV_E_TEMPLATE_DENIED	The permissions on the certificate template do not allow the current user to enroll for this type of certificate.
0x80094013 CERTSRV_E_DOWNLEVEL_DC_SSL_OR_UPGRADE	The contacted domain controller cannot support signed Lightweight Directory Access Protocol (LDAP) traffic. Update the domain controller or configure Certificate Services to use SSL for Active Directory access.
0x80094800 CERTSRV_E_UNSUPPORTED_CERT_TYPE	The requested certificate template is not supported by this CA.
0x80094801	The request contains no

<b>Return value/code</b>	<b>Description</b>
CERTSRV_E_NO_CERT_TYPE	certificate template information.
0x80094802 CERTSRV_E_TEMPLATE_CONFLICT	The request contains conflicting template information.
0x80094803 CERTSRV_E_SUBJECT_ALT_NAME_REQUIRED	The request is missing a required Subject Alternate name extension.
0x80094804 CERTSRV_E_ARCHIVED_KEY_REQUIRED	The request is missing a required private key for archival by the server.
0x80094805 CERTSRV_E_SMIME_REQUIRED	The request is missing a required SMIME capabilities extension.
0x80094806 CERTSRV_E_BAD_RENEWAL_SUBJECT	The request was made on behalf of a subject other than the caller. The certificate template must be configured to require at least one signature to authorize the request.
0x80094807 CERTSRV_E_BAD_TEMPLATE_VERSION	The request template version is newer than the supported template version.
0x80094808 CERTSRV_E_TEMPLATE_POLICY_REQUIRED	The template is missing a required signature policy attribute.
0x80094809 CERTSRV_E_SIGNATURE_POLICY_REQUIRED	The request is missing required signature policy information.
0x8009480A CERTSRV_E_SIGNATURE_COUNT	The request is missing one or more required signatures.
0x8009480B CERTSRV_E_SIGNATURE_REJECTED	One or more signatures did not include the required application or issuance policies. The request is missing one or more required valid signatures.
0x8009480C CERTSRV_E_ISSUANCE_POLICY_REQUIRED	The request is missing one or more required signature issuance policies.
0x8009480D CERTSRV_E_SUBJECT_UPN_REQUIRED	The UPN is unavailable and cannot be added to the Subject Alternate name.
0x8009480E CERTSRV_E_SUBJECT_DIRECTORY_GUID_REQUIRED	The Active Directory GUID is unavailable and cannot be added to the Subject Alternate name.
0x8009480F CERTSRV_E_SUBJECT_DNS_REQUIRED	The Domain Name System (DNS) name is unavailable and cannot be added to the Subject Alternate name.

Return value/code	Description
0x80094810 CERTSRV_E_ARCHIVED_KEY_UNEXPECTED	The request includes a private key for archival by the server, but key archival is not enabled for the specified certificate template.
0x80094811 CERTSRV_E_KEY_LENGTH	The public key does not meet the minimum size required by the specified certificate template.
0x80094812 CERTSRV_E_SUBJECT_EMAIL_REQUIRED	The email name is unavailable and cannot be added to the Subject or Subject Alternate name.
0x80094813 CERTSRV_E_UNKNOWN_CERT_TYPE	One or more certificate templates to be enabled on this CA could not be found.
0x80094814 CERTSRV_E_CERT_TYPE_OVERLAP	The certificate template renewal period is longer than the certificate validity period. The template should be reconfigured or the CA certificate renewed.
0x80094815 CERTSRV_E_TOO_MANY_SIGNATURES	The certificate template requires too many return authorization (RA) signatures. Only one RA signature is allowed.
0x80094816 CERTSRV_E_RENEWAL_BAD_PUBLIC_KEY	The key used in a renewal request does not match one of the certificates being renewed.
0x80094817 CERTSRV_E_INVALID_EK	The endorsement key certificate is not valid.
0x8009481A CERTSRV_E_KEY_ATTESTATION	Key attestation did not succeed.
0x80095000 XENROLL_E_KEY_NOT_EXPORTABLE	The key is not exportable.
0x80095001 XENROLL_E_CANNOT_ADD_ROOT_CERT	You cannot add the root CA certificate into your local store.
0x80095002 XENROLL_E_RESPONSE_KA_HASH_NOT_FOUND	The key archival hash attribute was not found in the response.
0x80095003 XENROLL_E_RESPONSE_UNEXPECTED_KA_HASH	An unexpected key archival hash attribute was found in the response.
0x80095004 XENROLL_E_RESPONSE_KA_HASH_MISMATCH	There is a key archival hash mismatch between the request and the response.
0x80095005 XENROLL_E_KEYSPEC_SMIME_MISMATCH	Signing certificate cannot include SMIME extension.

<b>Return value/code</b>	<b>Description</b>
0x80096001 TRUST_E_SYSTEM_ERROR	A system-level error occurred while verifying trust.
0x80096002 TRUST_E_NO_SIGNER_CERT	The certificate for the signer of the message is invalid or not found.
0x80096003 TRUST_E_COUNTER_SIGNER	One of the counter signatures was invalid.
0x80096004 TRUST_E_CERT_SIGNATURE	The signature of the certificate cannot be verified.
0x80096005 TRUST_E_TIME_STAMP	The time-stamp signature or certificate could not be verified or is malformed.
0x80096010 TRUST_E_BAD_DIGEST	The digital signature of the object did not verify.
0x80096019 TRUST_E_BASIC_CONSTRAINTS	A certificate's basic constraint extension has not been observed.
0x8009601E TRUST_E_FINANCIAL_CRITERIA	The certificate does not meet or contain the Authenticode financial extensions.
0x80097001 MSSIPOTF_E_OUTOFMEMRANGE	Tried to reference a part of the file outside the proper range.
0x80097002 MSSIPOTF_E_CANTGETOBJECT	Could not retrieve an object from the file.
0x80097003 MSSIPOTF_E_NOHEADTABLE	Could not find the head table in the file.
0x80097004 MSSIPOTF_E_BAD_MAGICNUMBER	The magic number in the head table is incorrect.
0x80097005 MSSIPOTF_E_BAD_OFFSET_TABLE	The offset table has incorrect values.
0x80097006 MSSIPOTF_E_TABLE_TAGORDER	Duplicate table tags or the tags are out of alphabetical order.
0x80097007 MSSIPOTF_E_TABLE_LONGWORD	A table does not start on a long word boundary.
0x80097008 MSSIPOTF_E_BAD_FIRST_TABLE_PLACEMENT	First table does not appear after header information.
0x80097009 MSSIPOTF_E_TABLES_OVERLAP	Two or more tables overlap.
0x8009700A MSSIPOTF_E_TABLE_PADBYTES	Too many pad bytes between tables, or pad bytes are not 0.

<b>Return value/code</b>	<b>Description</b>
0x8009700B MSSIPOTF_E_FILETOOSMALL	File is too small to contain the last table.
0x8009700C MSSIPOTF_E_TABLE_CHECKSUM	A table checksum is incorrect.
0x8009700D MSSIPOTF_E_FILE_CHECKSUM	The file checksum is incorrect.
0x80097010 MSSIPOTF_E_FAILED_POLICY	The signature does not have the correct attributes for the policy.
0x80097011 MSSIPOTF_E_FAILED_HINTS_CHECK	The file did not pass the hints check.
0x80097012 MSSIPOTF_E_NOT_OPENTYPE	The file is not an OpenType file.
0x80097013 MSSIPOTF_E_FILE	Failed on a file operation (such as open, map, read, or write).
0x80097014 MSSIPOTF_E_CRYPT	A call to a CryptoAPI function failed.
0x80097015 MSSIPOTF_E_BADVERSION	There is a bad version number in the file.
0x80097016 MSSIPOTF_E_DSIG_STRUCTURE	The structure of the DSIG table is incorrect.
0x80097017 MSSIPOTF_E_PCONST_CHECK	A check failed in a partially constant table.
0x80097018 MSSIPOTF_E_STRUCTURE	Some kind of structural error.
0x80097019 ERROR_CRED_REQUIRES_CONFIRMATION	The requested credential requires confirmation.
0x800B0001 TRUST_E_PROVIDER_UNKNOWN	Unknown trust provider.
0x800B0002 TRUST_E_ACTION_UNKNOWN	The trust verification action specified is not supported by the specified trust provider.
0x800B0003 TRUST_E_SUBJECT_FORM_UNKNOWN	The form specified for the subject is not one supported or known by the specified trust provider.
0x800B0004 TRUST_E_SUBJECT_NOT_TRUSTED	The subject is not trusted for the specified action.
0x800B0005 DIGSIG_E_ENCODE	Error due to problem in ASN.1 encoding process.
0x800B0006	Error due to problem in ASN.1

<b>Return value/code</b>	<b>Description</b>
DIGSIG_E_DECODE	decoding process.
0x800B0007 DIGSIG_E_EXTENSIBILITY	Reading/writing extensions where attributes are appropriate, and vice versa.
0x800B0008 DIGSIG_E_CRYPTO	Unspecified cryptographic failure.
0x800B0009 PERSIST_E_SIZEDEFINITE	The size of the data could not be determined.
0x800B000A PERSIST_E_SIZEINDEFINITE	The size of the indefinite-sized data could not be determined.
0x800B000B PERSIST_E_NOTSELSIZING	This object does not read and write self-sizing data.
0x800B0100 TRUST_E_NOSIGNATURE	No signature was present in the subject.
0x800B0101 CERT_E_EXPIRED	A required certificate is not within its validity period when verifying against the current system clock or the time stamp in the signed file.
0x800B0102 CERT_E_VALIDITYPERIODNESTING	The validity periods of the certification chain do not nest correctly.
0x800B0103 CERT_E_ROLE	A certificate that can only be used as an end entity is being used as a CA or vice versa.
0x800B0104 CERT_E_PATHLENCONST	A path length constraint in the certification chain has been violated.
0x800B0105 CERT_E_CRITICAL	A certificate contains an unknown extension that is marked "critical".
0x800B0106 CERT_E_PURPOSE	A certificate is being used for a purpose other than the ones specified by its CA.
0x800B0107 CERT_E_ISSUERCHAINING	A parent of a given certificate did not issue that child certificate.
0x800B0108 CERT_E_MALFORMED	A certificate is missing or has an empty value for an important field, such as a subject or issuer name.
0x800B0109 CERT_E_UNTRUSTEDROOT	A certificate chain processed, but terminated in a root certificate that is not trusted by the trust provider.

Return value/code	Description
0x800B010A CERT_E_CHAINING	A certificate chain could not be built to a trusted root authority.
0x800B010B TRUST_E_FAIL	Generic trust failure.
0x800B010C CERT_E_REVOKED	A certificate was explicitly revoked by its issuer.
0x800B010D CERT_E_UNTRUSTEDTESTROOT	The certification path terminates with the test root that is not trusted with the current policy settings.
0x800B010E CERT_E_REVOCATION_FAILURE	The revocation process could not continue—the certificates could not be checked.
0x800B010F CERT_E_CN_NO_MATCH	The certificate's CN name does not match the passed value.
0x800B0110 CERT_E_WRONG_USAGE	The certificate is not valid for the requested usage.
0x800B0111 TRUST_E_EXPLICIT_DISTRUST	The certificate was explicitly marked as untrusted by the user.
0x800B0112 CERT_E_UNTRUSTEDCA	A certification chain processed correctly, but one of the CA certificates is not trusted by the policy provider.
0x800B0113 CERT_E_INVALID_POLICY	The certificate has invalid policy.
0x800B0114 CERT_E_INVALID_NAME	The certificate has an invalid name. The name is not included in the permitted list or is explicitly excluded.
0x800D0003 NS_W_SERVER_BANDWIDTH_LIMIT	The maximum filebitrate value specified is greater than the server's configured maximum bandwidth.
0x800D0004 NS_W_FILE_BANDWIDTH_LIMIT	The maximum bandwidth value specified is less than the maximum filebitrate.
0x800D0060 NS_W_UNKNOWN_EVENT	Unknown %1 event encountered.
0x800D0199 NS_I_CATATONIC_FAILURE	Disk %1 ( %2 ) on Content Server %3, will be failed because it is catatonic.
0x800D019A NS_I_CATATONIC_AUTO_UNFAIL	Disk %1 ( %2 ) on Content Server %3, auto online from catatonic state.

<b>Return value/code</b>	<b>Description</b>
0x800F0000 SPAPI_E_EXPECTED_SECTION_NAME	A non-empty line was encountered in the INF before the start of a section.
0x800F0001 SPAPI_E_BAD_SECTION_NAME_LINE	A section name marker in the information file (INF) is not complete or does not exist on a line by itself.
0x800F0002 SPAPI_E_SECTION_NAME_TOO_LONG	An INF section was encountered whose name exceeds the maximum section name length.
0x800F0003 SPAPI_E_GENERAL_SYNTAX	The syntax of the INF is invalid.
0x800F0100 SPAPI_E_WRONG_INF_STYLE	The style of the INF is different than what was requested.
0x800F0101 SPAPI_E_SECTION_NOT_FOUND	The required section was not found in the INF.
0x800F0102 SPAPI_E_LINE_NOT_FOUND	The required line was not found in the INF.
0x800F0103 SPAPI_E_NO_BACKUP	The files affected by the installation of this file queue have not been backed up for uninstall.
0x800F0200 SPAPI_E_NO_ASSOCIATED_CLASS	The INF or the device information set or element does not have an associated install class.
0x800F0201 SPAPI_E_CLASS_MISMATCH	The INF or the device information set or element does not match the specified install class.
0x800F0202 SPAPI_E_DUPLICATE_FOUND	An existing device was found that is a duplicate of the device being manually installed.
0x800F0203 SPAPI_E_NO_DRIVER_SELECTED	There is no driver selected for the device information set or element.
0x800F0204 SPAPI_E_KEY_DOES_NOT_EXIST	The requested device registry key does not exist.
0x800F0205 SPAPI_E_INVALID_DEVINST_NAME	The device instance name is invalid.
0x800F0206 SPAPI_E_INVALID_CLASS	The install class is not present or is invalid.
0x800F0207 SPAPI_E_DEVINST_ALREADY_EXISTS	The device instance cannot be created because it already exists.

<b>Return value/code</b>	<b>Description</b>
0x800F0208 SPAPI_E_DEVINFO_NOT_REGISTERED	The operation cannot be performed on a device information element that has not been registered.
0x800F0209 SPAPI_E_INVALID_REG_PROPERTY	The device property code is invalid.
0x800F020A SPAPI_E_NO_INF	The INF from which a driver list is to be built does not exist.
0x800F020B SPAPI_E_NO_SUCH_DEVINST	The device instance does not exist in the hardware tree.
0x800F020C SPAPI_E_CANT_LOAD_CLASS_ICON	The icon representing this install class cannot be loaded.
0x800F020D SPAPI_E_INVALID_CLASS_INSTALLER	The class installer registry entry is invalid.
0x800F020E SPAPI_E_DI_DO_DEFAULT	The class installer has indicated that the default action should be performed for this installation request.
0x800F020F SPAPI_E_DI_NOFILECOPY	The operation does not require any files to be copied.
0x800F0210 SPAPI_E_INVALID_HWPROFILE	The specified hardware profile does not exist.
0x800F0211 SPAPI_E_NO_DEVICE_SELECTED	There is no device information element currently selected for this device information set.
0x800F0212 SPAPI_E_DEVINFO_LIST_LOCKED	The operation cannot be performed because the device information set is locked.
0x800F0213 SPAPI_E_DEVINFO_DATA_LOCKED	The operation cannot be performed because the device information element is locked.
0x800F0214 SPAPI_E_DI_BAD_PATH	The specified path does not contain any applicable device INFs.
0x800F0215 SPAPI_E_NO_CLASSINSTALL_PARAMS	No class installer parameters have been set for the device information set or element.
0x800F0216 SPAPI_E_FILEQUEUE_LOCKED	The operation cannot be performed because the file queue is locked.
0x800F0217 SPAPI_E_BAD_SERVICE_INSTALLSECT	A service installation section in this INF is invalid.
0x800F0218 SPAPI_E_NO_CLASS_DRIVER_LIST	There is no class driver list for the device information element.

<b>Return value/code</b>	<b>Description</b>
0x800F0219 SPAPI_E_NO_ASSOCIATED_SERVICE	The installation failed because a function driver was not specified for this device instance.
0x800F021A SPAPI_E_NO_DEFAULT_DEVICE_INTERFACE	There is presently no default device interface designated for this interface class.
0x800F021B SPAPI_E_DEVICE_INTERFACE_ACTIVE	The operation cannot be performed because the device interface is currently active.
0x800F021C SPAPI_E_DEVICE_INTERFACE_REMOVED	The operation cannot be performed because the device interface has been removed from the system.
0x800F021D SPAPI_E_BAD_INTERFACE_INSTALLSECT	An interface installation section in this INF is invalid.
0x800F021E SPAPI_E_NO_SUCH_INTERFACE_CLASS	This interface class does not exist in the system.
0x800F021F SPAPI_E_INVALID_REFERENCE_STRING	The reference string supplied for this interface device is invalid.
0x800F0220 SPAPI_E_INVALID_MACHINENAME	The specified machine name does not conform to Universal Naming Convention (UNCs).
0x800F0221 SPAPI_E_REMOTE_COMM_FAILURE	A general remote communication error occurred.
0x800F0222 SPAPI_E_MACHINE_UNAVAILABLE	The machine selected for remote communication is not available at this time.
0x800F0223 SPAPI_E_NO_CONFIGMGR_SERVICES	The Plug and Play service is not available on the remote machine.
0x800F0224 SPAPI_E_INVALID_PROPPAGE_PROVIDER	The property page provider registry entry is invalid.
0x800F0225 SPAPI_E_NO_SUCH_DEVICE_INTERFACE	The requested device interface is not present in the system.
0x800F0226 SPAPI_E_DI_POSTPROCESSING_REQUIRED	The device's co-installer has additional work to perform after installation is complete.
0x800F0227 SPAPI_E_INVALID_COINSTALLER	The device's co-installer is invalid.
0x800F0228 SPAPI_E_NO_COMPAT_DRIVERS	There are no compatible drivers for this device.
0x800F0229 SPAPI_E_NO_DEVICE_ICON	There is no icon that represents this device or device type.

<b>Return value/code</b>	<b>Description</b>
0x800F022A SPAPI_E_INVALID_INF_LOGCONFIG	A logical configuration specified in this INF is invalid.
0x800F022B SPAPI_E_DI_DONT_INSTALL	The class installer has denied the request to install or upgrade this device.
0x800F022C SPAPI_E_INVALID_FILTER_DRIVER	One of the filter drivers installed for this device is invalid.
0x800F022D SPAPI_E_NON_WINDOWS_NT_DRIVER	The driver selected for this device does not support Windows XP operating system.
0x800F022E SPAPI_E_NON_WINDOWS_DRIVER	The driver selected for this device does not support Windows.
0x800F022F SPAPI_E_NO_CATALOG_FOR_OEM_INF	The third-party INF does not contain digital signature information.
0x800F0230 SPAPI_E_DEVINSTALL_QUEUE_NONNATIVE	An invalid attempt was made to use a device installation file queue for verification of digital signatures relative to other platforms.
0x800F0231 SPAPI_E_NOT_DISABLEABLE	The device cannot be disabled.
0x800F0232 SPAPI_E_CANT_REMOVE_DEVINST	The device could not be dynamically removed.
0x800F0233 SPAPI_E_INVALID_TARGET	Cannot copy to specified target.
0x800F0234 SPAPI_E_DRIVER_NONNATIVE	Driver is not intended for this platform.
0x800F0235 SPAPI_E_IN_WOW64	Operation not allowed in WOW64.
0x800F0236 SPAPI_E_SET_SYSTEM_RESTORE_POINT	The operation involving unsigned file copying was rolled back, so that a system restore point could be set.
0x800F0237 SPAPI_E_INCORRECTLY_COPIED_INF	An INF was copied into the Windows INF directory in an improper manner.
0x800F0238 SPAPI_E_SCE_DISABLED	The Security Configuration Editor (SCE) APIs have been disabled on this embedded product.
0x800F0239 SPAPI_E_UNKNOWN_EXCEPTION	An unknown exception was encountered.

Return value/code	Description
0x800F023A SPAPI_E_PNP_REGISTRY_ERROR	A problem was encountered when accessing the Plug and Play registry database.
0x800F023B SPAPI_E_REMOTE_REQUEST_UNSUPPORTED	The requested operation is not supported for a remote machine.
0x800F023C SPAPI_E_NOT_AN_INSTALLED_OEM_INF	The specified file is not an installed original equipment manufacturer (OEM) INF.
0x800F023D SPAPI_E_INF_IN_USE_BY_DEVICES	One or more devices are presently installed using the specified INF.
0x800F023E SPAPI_E_DI_FUNCTION_OBSOLETE	The requested device install operation is obsolete.
0x800F023F SPAPI_E_NO_AUTHENTICODE_CATALOG	A file could not be verified because it does not have an associated catalog signed via Authenticode.
0x800F0240 SPAPI_E_AUTHENTICODE_DISALLOWED	Authenticode signature verification is not supported for the specified INF.
0x800F0241 SPAPI_E_AUTHENTICODE_TRUSTED_PUBLISHER	The INF was signed with an Authenticode catalog from a trusted publisher.
0x800F0242 SPAPI_E_AUTHENTICODE_TRUST_NOT_ESTABLISHED	The publisher of an Authenticode-signed catalog has not yet been established as trusted.
0x800F0243 SPAPI_E_AUTHENTICODE_PUBLISHER_NOT_TRUSTED	The publisher of an Authenticode-signed catalog was not established as trusted.
0x800F0244 SPAPI_E_SIGNATURE_OSATTRIBUTE_MISMATCH	The software was tested for compliance with Windows logo requirements on a different version of Windows and <b>may</b> not be compatible with this version.
0x800F0245 SPAPI_E_ONLY_VALIDATE_VIA_AUTHENTICODE	The file <b>may</b> be validated only by a catalog signed via Authenticode.
0x800F0246 SPAPI_E_DEVICE_INSTALLER_NOT_READY	One of the installers for this device cannot perform the installation at this time.
0x800F0247 SPAPI_E_DRIVER_STORE_ADD_FAILED	A problem was encountered while attempting to add the driver to the store.
0x800F0248 SPAPI_E_DEVICE_INSTALL_BLOCKED	The installation of this device is forbidden by system policy. Contact your system

Return value/code	Description
	administrator.
0x800F0249 SPAPI_E_DRIVER_INSTALL_BLOCKED	The installation of this driver is forbidden by system policy. Contact your system administrator.
0x800F024A SPAPI_E_WRONG_INF_TYPE	The specified INF is the wrong type for this operation.
0x800F024B SPAPI_E_FILE_HASH_NOT_IN_CATALOG	The hash for the file is not present in the specified catalog file. The file is likely corrupt or the victim of tampering.
0x800F024C SPAPI_E_DRIVER_STORE_DELETE_FAILED	A problem was encountered while attempting to delete the driver from the store.
0x800F0300 SPAPI_E_UNRECOVERABLE_STACK_OVERFLOW	An unrecoverable stack overflow was encountered.
0x800F1000 SPAPI_E_ERROR_NOT_INSTALLED	No installed components were detected.
0x80100001 SCARD_F_INTERNAL_ERROR	An internal consistency check failed.
0x80100002 SCARD_E_CANCELLED	The action was canceled by an SCardCancel request.
0x80100003 SCARD_E_INVALID_HANDLE	The supplied handle was invalid.
0x80100004 SCARD_E_INVALID_PARAMETER	One or more of the supplied parameters could not be properly interpreted.
0x80100005 SCARD_E_INVALID_TARGET	Registry startup information is missing or invalid.
0x80100006 SCARD_E_NO_MEMORY	Not enough memory available to complete this command.
0x80100007 SCARD_F_WAITED_TOO_LONG	An internal consistency timer has expired.
0x80100008 SCARD_E_INSUFFICIENT_BUFFER	The data buffer to receive returned data is too small for the returned data.
0x80100009 SCARD_E_UNKNOWN_READER	The specified reader name is not recognized.
0x8010000A SCARD_E_TIMEOUT	The user-specified time-out value has expired.
0x8010000B SCARD_E_SHARING_VIOLATION	The smart card cannot be accessed because of other connections outstanding.

<b>Return value/code</b>	<b>Description</b>
0x8010000C SCARD_E_NO_SMARTCARD	The operation requires a smart card, but no smart card is currently in the device.
0x8010000D SCARD_E_UNKNOWN_CARD	The specified smart card name is not recognized.
0x8010000E SCARD_E_CANT_DISPOSE	The system could not dispose of the media in the requested manner.
0x8010000F SCARD_E_PROTO_MISMATCH	The requested protocols are incompatible with the protocol currently in use with the smart card.
0x80100010 SCARD_E_NOT_READY	The reader or smart card is not ready to accept commands.
0x80100011 SCARD_E_INVALID_VALUE	One or more of the supplied parameters values could not be properly interpreted.
0x80100012 SCARD_E_SYSTEM_CANCELLED	The action was canceled by the system, presumably to log off or shut down.
0x80100013 SCARD_F_COMM_ERROR	An internal communications error has been detected.
0x80100014 SCARD_F_UNKNOWN_ERROR	An internal error has been detected, but the source is unknown.
0x80100015 SCARD_E_INVALID_ATR	An automatic terminal recognition (ATR) obtained from the registry is not a valid ATR string.
0x80100016 SCARD_E_NOT_TRANSACTED	An attempt was made to end a nonexistent transaction.
0x80100017 SCARD_E_READER_UNAVAILABLE	The specified reader is not currently available for use.
0x80100018 SCARD_P_SHUTDOWN	The operation has been aborted to allow the server application to exit.
0x80100019 SCARD_E_PCI_TOO_SMALL	The peripheral component interconnect (PCI) Receive buffer was too small.
0x8010001A SCARD_E_READER_UNSUPPORTED	The reader driver does not meet minimal requirements for support.
0x8010001B SCARD_E_DUPLICATE_READER	The reader driver did not produce a unique reader name.
0x8010001C	The smart card does not meet

<b>Return value/code</b>	<b>Description</b>
SCARD_E_CARD_UNSUPPORTED	minimal requirements for support.
0x8010001D SCARD_E_NO_SERVICE	The smart card resource manager is not running.
0x8010001E SCARD_E_SERVICE_STOPPED	The smart card resource manager has shut down.
0x8010001F SCARD_E_UNEXPECTED	An unexpected card error has occurred.
0x80100020 SCARD_E_ICC_INSTALLATION	No primary provider can be found for the smart card.
0x80100021 SCARD_E_ICC_CREATEORDER	The requested order of object creation is not supported.
0x80100022 SCARD_E_UNSUPPORTED_FEATURE	This smart card does not support the requested feature.
0x80100023 SCARD_E_DIR_NOT_FOUND	The identified directory does not exist in the smart card.
0x80100024 SCARD_E_FILE_NOT_FOUND	The identified file does not exist in the smart card.
0x80100025 SCARD_E_NO_DIR	The supplied path does not represent a smart card directory.
0x80100026 SCARD_E_NO_FILE	The supplied path does not represent a smart card file.
0x80100027 SCARD_E_NO_ACCESS	Access is denied to this file.
0x80100028 SCARD_E_WRITE_TOO_MANY	The smart card does not have enough memory to store the information.
0x80100029 SCARD_E_BAD_SEEK	There was an error trying to set the smart card file object pointer.
0x8010002A SCARD_E_INVALID_CHV	The supplied PIN is incorrect.
0x8010002B SCARD_E_UNKNOWN_RES_MNG	An unrecognized error code was returned from a layered component.
0x8010002C SCARD_E_NO_SUCH_CERTIFICATE	The requested certificate does not exist.
0x8010002D SCARD_E_CERTIFICATE_UNAVAILABLE	The requested certificate could not be obtained.
0x8010002E	Cannot find a smart card

Return value/code	Description
SCARD_E_NO_READERS_AVAILABLE	reader.
0x8010002F SCARD_E_COMM_DATA_LOST	A communications error with the smart card has been detected. Retry the operation.
0x80100030 SCARD_E_NO_KEY_CONTAINER	The requested key container does not exist on the smart card.
0x80100031 SCARD_E_SERVER_TOO_BUSY	The smart card resource manager is too busy to complete this operation.
0x80100065 SCARD_W_UNSUPPORTED_CARD	The reader cannot communicate with the smart card, due to ATR configuration conflicts.
0x80100066 SCARD_W_UNRESPONSIVE_CARD	The smart card is not responding to a reset.
0x80100067 SCARD_W_UNPOWERED_CARD	Power has been removed from the smart card, so that further communication is not possible.
0x80100068 SCARD_W_RESET_CARD	The smart card has been reset, so any shared state information is invalid.
0x80100069 SCARD_W_REMOVED_CARD	The smart card has been removed, so that further communication is not possible.
0x8010006A SCARD_W_SECURITY_VIOLATION	Access was denied because of a security violation.
0x8010006B SCARD_W_WRONG_CHV	The card cannot be accessed because the wrong PIN was presented.
0x8010006C SCARD_W_CHV_BLOCKED	The card cannot be accessed because the maximum number of PIN entry attempts has been reached.
0x8010006D SCARD_W_EOF	The end of the smart card file has been reached.
0x8010006E SCARD_W_CANCELLED_BY_USER	The action was canceled by the user.
0x8010006F SCARD_W_CARD_NOT_AUTHENTICATED	No PIN was presented to the smart card.
0x80110401 COMADMIN_E_OBJECTERRORS	Errors occurred accessing one or more objects—the ErrorInfo collection <a href="#">may have contains</a> more detail.
0x80110402 COMADMIN_E_OBJECTINVALID	One or more of the object's properties are missing or

Return value/code	Description
	invalid.
0x80110403 COMADMIN_E_KEYMISSING	The object was not found in the catalog.
0x80110404 COMADMIN_E_ALREADYINSTALLED	The object is already registered.
0x80110407 COMADMIN_E_APP_FILE_WRITEFAIL	An error occurred writing to the application file.
0x80110408 COMADMIN_E_APP_FILE_READFAIL	An error occurred reading the application file.
0x80110409 COMADMIN_E_APP_FILE_VERSION	Invalid version number in application file.
0x8011040A COMADMIN_E_BADPATH	The file path is invalid.
0x8011040B COMADMIN_E_APPLICATIONEXISTS	The application is already installed.
0x8011040C COMADMIN_E_ROLEEXISTS	The role already exists.
0x8011040D COMADMIN_E_CANTCOPYFILE	An error occurred copying the file.
0x8011040F COMADMIN_E_NOUSER	One or more users are not valid.
0x80110410 COMADMIN_E_INVALIDUSERIDS	One or more users in the application file are not valid.
0x80110411 COMADMIN_E_NOREGISTRYCLSID	The component's CLSID is missing or corrupt.
0x80110412 COMADMIN_E_BADREGISTRYPROGID	The component's programmatic ID is missing or corrupt.
0x80110413 COMADMIN_E_AUTHENTICATIONLEVEL	Unable to set required authentication level for update request.
0x80110414 COMADMIN_E_USERPASSWDNOTVALID	The identity or password set on the application is not valid.
0x80110418 COMADMIN_E_CLSIDORIIDMISMATCH	Application file CLSIDs or instance identifiers (IIDs) do not match corresponding DLLs.
0x80110419 COMADMIN_E_REMOTEINTERFACE	Interface information is either missing or changed.
0x8011041A COMADMIN_E_DLLREGISTERSERVER	DllRegisterServer failed on component install.

<b>Return value/code</b>	<b>Description</b>
0x8011041B COMADMIN_E_NOSERVERSHARE	No server file share available.
0x8011041D COMADMIN_E_DLLLOADFAILED	DLL could not be loaded.
0x8011041E COMADMIN_E_BADREGISTRYLIBID	The registered TypeLib ID is not valid.
0x8011041F COMADMIN_E_APPDIRNOTFOUND	Application install directory not found.
0x80110423 COMADMIN_E_REGISTRARFAILED	Errors occurred while in the component registrar.
0x80110424 COMADMIN_E_COMPFILE_DOESNOTEXIST	The file does not exist.
0x80110425 COMADMIN_E_COMPFILE_LOADDLLFAIL	The DLL could not be loaded.
0x80110426 COMADMIN_E_COMPFILE_GETCLASSOBJ	GetClassObject failed in the DLL.
0x80110427 COMADMIN_E_COMPFILE_CLASSNOTAVAIL	The DLL does not support the components listed in the TypeLib.
0x80110428 COMADMIN_E_COMPFILE_BADTLB	The TypeLib could not be loaded.
0x80110429 COMADMIN_E_COMPFILE_NOTINSTALLABLE	The file does not contain components or component information.
0x8011042A COMADMIN_E_NOTCHANGEABLE	Changes to this object and its subobjects have been disabled.
0x8011042B COMADMIN_E_NOTDELETEABLE	The delete function has been disabled for this object.
0x8011042C COMADMIN_E_SESSION	The server catalog version is not supported.
0x8011042D COMADMIN_E_COMP_MOVE_LOCKED	The component move was disallowed because the source or destination application is either a system application or currently locked against changes.
0x8011042E COMADMIN_E_COMP_MOVE_BAD_DEST	The component move failed because the destination application no longer exists.
0x80110430 COMADMIN_E_REGISTERTLB	The system was unable to register the TypeLib.
0x80110433	This operation cannot be

<b>Return value/code</b>	<b>Description</b>
COMADMIN_E_SYSTEMAPP	performed on the system application.
0x80110434 COMADMIN_E_COMPFILE_NOREGISTRAR	The component registrar referenced in this file is not available.
0x80110435 COMADMIN_E_COREQCOMPINSTALLED	A component in the same DLL is already installed.
0x80110436 COMADMIN_E_SERVICENOTINSTALLED	The service is not installed.
0x80110437 COMADMIN_E_PROPERTYSAVEFAILED	One or more property settings are either invalid or in conflict with each other.
0x80110438 COMADMIN_E_OBJECTEXISTS	The object you are attempting to add or rename already exists.
0x80110439 COMADMIN_E_COMPONENTEXISTS	The component already exists.
0x8011043B COMADMIN_E_REGFILE_CORRUPT	The registration file is corrupt.
0x8011043C COMADMIN_E_PROPERTY_OVERFLOW	The property value is too large.
0x8011043E COMADMIN_E_NOTINREGISTRY	Object was not found in registry.
0x8011043F COMADMIN_E_OBJECTNOTPOOLABLE	This object cannot be pooled.
0x80110446 COMADMIN_E_APPLID_MATCHES_CLSID	A CLSID with the same GUID as the new application ID is already installed on this machine.
0x80110447 COMADMIN_E_ROLE_DOES_NOT_EXIST	A role assigned to a component, interface, or method did not exist in the application.
0x80110448 COMADMIN_E_START_APP_NEEDS_COMPONENTS	You must have components in an application to start the application.
0x80110449 COMADMIN_E_REQUIRES_DIFFERENT_PLATFORM	This operation is not enabled on this platform.
0x8011044A COMADMIN_E_CAN_NOT_EXPORT_APP_PROXY	Application proxy is not exportable.
0x8011044B COMADMIN_E_CAN_NOT_START_APP	Failed to start application because it is either a library application or an application proxy.

Return value/code	Description
0x8011044C COMADMIN_E_CAN_NOT_EXPORT_SYS_APP	System application is not exportable.
0x8011044D COMADMIN_E_CANT_SUBSCRIBE_TO_COMPONENT	Cannot subscribe to this component (the component <b>may</b> have been imported).
0x8011044E COMADMIN_E_EVENTCLASS_CANT_BE_SUBSCRIBER	An event class cannot also be a subscriber component.
0x8011044F COMADMIN_E_LIB_APP_PROXY_INCOMPATIBLE	Library applications and application proxies are incompatible.
0x80110450 COMADMIN_E_BASE_PARTITION_ONLY	This function is valid for the base partition only.
0x80110451 COMADMIN_E_START_APP_DISABLED	You cannot start an application that has been disabled.
0x80110457 COMADMIN_E_CAT_DUPLICATE_PARTITION_NAME	The specified partition name is already in use on this computer.
0x80110458 COMADMIN_E_CAT_INVALID_PARTITION_NAME	The specified partition name is invalid. Check that the name contains at least one visible character.
0x80110459 COMADMIN_E_CAT_PARTITION_IN_USE	The partition cannot be deleted because it is the default partition for one or more users.
0x8011045A COMADMIN_E_FILE_PARTITION_DUPLICATE_FILES	The partition cannot be exported because one or more components in the partition have the same file name.
0x8011045B COMADMIN_E_CAT_IMPORTED_COMPONENTS_NOT_ALLOWED	Applications that contain one or more imported components cannot be installed into a nonbase partition.
0x8011045C COMADMIN_E_AMBIGUOUS_APPLICATION_NAME	The application name is not unique and cannot be resolved to an application ID.
0x8011045D COMADMIN_E_AMBIGUOUS_PARTITION_NAME	The partition name is not unique and cannot be resolved to a partition ID.
0x80110472 COMADMIN_E_REGDB_NOTINITIALIZED	The COM+ registry database has not been initialized.
0x80110473 COMADMIN_E_REGDB_NOTOPEN	The COM+ registry database is not open.
0x80110474 COMADMIN_E_REGDB_SYSTEMERR	The COM+ registry database detected a system error.
0x80110475	The COM+ registry database is

<b>Return value/code</b>	<b>Description</b>
COMADMIN_E_REGDB_ALREADYRUNNING	already running.
0x80110480 COMADMIN_E_MIG_VERSIONNOTSUPPORTED	This version of the COM+ registry database cannot be migrated.
0x80110481 COMADMIN_E_MIG_SCHEMANOTFOUND	The schema version to be migrated could not be found in the COM+ registry database.
0x80110482 COMADMIN_E_CAT_BITNESSMISMATCH	There was a type mismatch between binaries.
0x80110483 COMADMIN_E_CAT_UNACCEPTABLEBITNESS	A binary of unknown or invalid type was provided.
0x80110484 COMADMIN_E_CAT_WRONGAPPBITNESS	There was a type mismatch between a binary and an application.
0x80110485 COMADMIN_E_CAT_PAUSE_RESUME_NOT_SUPPORTED	The application cannot be paused or resumed.
0x80110486 COMADMIN_E_CAT_SERVERFAULT	The COM+ catalog server threw an exception during execution.
0x80110600 COMQC_E_APPLICATION_NOT_QUEUED	Only COM+ applications marked "queued" can be invoked using the "queue" moniker.
0x80110601 COMQC_E_NO_QUEUEABLE_INTERFACES	At least one interface must be marked "queued" to create a queued component instance with the "queue" moniker.
0x80110602 COMQC_E_QUEUEING_SERVICE_NOT_AVAILABLE	Message Queuing is required for the requested operation and is not installed.
0x80110603 COMQC_E_NO_IPERSISTSTREAM	Unable to marshal an interface that does not support IPersistStream.
0x80110604 COMQC_E_BAD_MESSAGE	The message is improperly formatted or was damaged in transit.
0x80110605 COMQC_E_UNAUTHENTICATED	An unauthenticated message was received by an application that accepts only authenticated messages.
0x80110606 COMQC_E_UNTRUSTED_ENQUEUEER	The message was requeued or moved by a user not in the QC Trusted User "role".
0x80110701 MSDTC_E_DUPLICATE_RESOURCE	Cannot create a duplicate resource of type Distributed Transaction Coordinator.
0x80110808	One of the objects being inserted or updated does not

Return value/code	Description
COMADMIN_E_OBJECT_PARENT_MISSING	belong to a valid parent collection.
0x80110809 COMADMIN_E_OBJECT_DOES_NOT_EXIST	One of the specified objects cannot be found.
0x8011080A COMADMIN_E_APP_NOT_RUNNING	The specified application is not currently running.
0x8011080B COMADMIN_E_INVALID_PARTITION	The partitions specified are not valid.
0x8011080D COMADMIN_E_SVCAPP_NOT_POOLABLE_OR_RECYCLABLE	COM+ applications that run as Windows NT service <del>may</del> <del>not</del> cannot be pooled or recycled.
0x8011080E COMADMIN_E_USER_IN_SET	One or more users are already assigned to a local partition set.
0x8011080F COMADMIN_E_CANTRECYCLELIBRARYAPPS	Library applications <del>may</del> <del>not</del> cannot be recycled.
0x80110811 COMADMIN_E_CANTRECYCLESERVICEAPPS	Applications running as Windows NT services <del>may</del> <del>not</del> cannot be recycled.
0x80110812 COMADMIN_E_PROCESSALREADYRECYCLED	The process has already been recycled.
0x80110813 COMADMIN_E_PAUSEDPROCESSMAYNOTBERECYCLED	A paused process <del>may</del> <del>not</del> cannot be recycled.
0x80110814 COMADMIN_E_CANTMAKEINPROCSERVICE	Library applications <del>may</del> <del>not</del> cannot be Windows NT services.
0x80110815 COMADMIN_E_PROGIDINUSEBYCLSID	The ProgID provided to the copy operation is invalid. The ProgID is in use by another registered CLSID.
0x80110816 COMADMIN_E_DEFAULT_PARTITION_NOT_IN_SET	The partition specified as the default is not a member of the partition set.
0x80110817 COMADMIN_E_RECYCLEDPROCESSMAYNOTBEPAUSED	A recycled process <del>may</del> <del>not</del> cannot be paused.
0x80110818 COMADMIN_E_PARTITION_ACCESSDENIED	Access to the specified partition is denied.
0x80110819 COMADMIN_E_PARTITION_MSI_ONLY	Only application files (*.msi files) can be installed into partitions.
0x8011081A COMADMIN_E_LEGACYCOMPS_NOT_ALLOWED_IN_1_0_FORMAT	Applications containing one or more legacy components <del>may</del> <del>not</del> cannot be exported to 1.0 format.

Return value/code	Description
0x8011081B COMADMIN_E_LEGACYCOMPS_NOT_ALLOWED_IN_NONBASE_PARTITIONS	Legacy components <del>may</del> <b>cannot</b> exist in nonbase partitions.
0x8011081C COMADMIN_E_COMP_MOVE_SOURCE	A component cannot be moved (or copied) from the System Application, an application proxy, or a nonchangeable application.
0x8011081D COMADMIN_E_COMP_MOVE_DEST	A component cannot be moved (or copied) to the System Application, an application proxy or a nonchangeable application.
0x8011081E COMADMIN_E_COMP_MOVE_PRIVATE	A private component cannot be moved (or copied) to a library application or to the base partition.
0x8011081F COMADMIN_E_BASEPARTITION_REQUIRED_IN_SET	The Base Application Partition exists in all partition sets and cannot be removed.
0x80110820 COMADMIN_E_CANNOT_ALIAS_EVENTCLASS	Alas, Event Class components cannot be aliased.
0x80110821 COMADMIN_E_PRIVATE_ACCESSDENIED	Access is denied because the component is private.
0x80110822 COMADMIN_E_SAFERINVALID	The specified SAFER level is invalid.
0x80110823 COMADMIN_E_REGISTRY_ACCESSDENIED	The specified user cannot write to the system registry.
0x80110824 COMADMIN_E_PARTITIONS_DISABLED	COM+ partitions are currently disabled.
0x801F0001 ERROR_FLT_NO_HANDLER_DEFINED	A handler was not defined by the filter for this operation.
0x801F0002 ERROR_FLT_CONTEXT_ALREADY_DEFINED	A context is already defined for this object.
0x801F0003 ERROR_FLT_INVALID_ASYNCHRONOUS_REQUEST	Asynchronous requests are not valid for this operation.
0x801F0004 ERROR_FLT_DISALLOW_FAST_IO	Disallow the Fast IO path for this operation.
0x801F0005 ERROR_FLT_INVALID_NAME_REQUEST	An invalid name request was made. The name requested cannot be retrieved at this time.
0x801F0006 ERROR_FLT_NOT_SAFE_TO_POST_OPERATION	Posting this operation to a worker thread for further processing is not safe at this time because it could lead to a

Return value/code	Description
	system deadlock.
0x801F0007 ERROR_FLT_NOT_INITIALIZED	The Filter Manager was not initialized when a filter tried to register. Be sure that the Filter Manager is being loaded as a driver.
0x801F0008 ERROR_FLT_FILTER_NOT_READY	The filter is not ready for attachment to volumes because it has not finished initializing (FltStartFiltering has not been called).
0x801F0009 ERROR_FLT_POST_OPERATION_CLEANUP	The filter must clean up any operation-specific context at this time because it is being removed from the system before the operation is completed by the lower drivers.
0x801F000A ERROR_FLT_INTERNAL_ERROR	The Filter Manager had an internal error from which it cannot recover; therefore, the operation has been failed. This is usually the result of a filter returning an invalid value from a preoperation callback.
0x801F000B ERROR_FLT_DELETING_OBJECT	The object specified for this action is in the process of being deleted; therefore, the action requested cannot be completed at this time.
0x801F000C ERROR_FLT_MUST_BE_NONPAGED_POOL	Nonpaged pool must be used for this type of context.
0x801F000D ERROR_FLT_DUPLICATE_ENTRY	A duplicate handler definition has been provided for an operation.
0x801F000E ERROR_FLT_CBDQ_DISABLED	The callback data queue has been disabled.
0x801F000F ERROR_FLT_DO_NOT_ATTACH	Do not attach the filter to the volume at this time.
0x801F0010 ERROR_FLT_DO_NOT_DETACH	Do not detach the filter from the volume at this time.
0x801F0011 ERROR_FLT_INSTANCE_ALTITUDE_COLLISION	An instance already exists at this altitude on the volume specified.
0x801F0012 ERROR_FLT_INSTANCE_NAME_COLLISION	An instance already exists with this name on the volume specified.
0x801F0013 ERROR_FLT_FILTER_NOT_FOUND	The system could not find the filter specified.

<b>Return value/code</b>	<b>Description</b>
0x801F0014 ERROR_FLT_VOLUME_NOT_FOUND	The system could not find the volume specified.
0x801F0015 ERROR_FLT_INSTANCE_NOT_FOUND	The system could not find the instance specified.
0x801F0016 ERROR_FLT_CONTEXT_ALLOCATION_NOT_FOUND	No registered context allocation definition was found for the given request.
0x801F0017 ERROR_FLT_INVALID_CONTEXT_REGISTRATION	An invalid parameter was specified during context registration.
0x801F0018 ERROR_FLT_NAME_CACHE_MISS	The name requested was not found in the Filter Manager name cache and could not be retrieved from the file system.
0x801F0019 ERROR_FLT_NO_DEVICE_OBJECT	The requested device object does not exist for the given volume.
0x801F001A ERROR_FLT_VOLUME_ALREADY_MOUNTED	The specified volume is already mounted.
0x801F001B ERROR_FLT_ALREADY_ENLISTED	The specified Transaction Context is already enlisted in a transaction.
0x801F001C ERROR_FLT_CONTEXT_ALREADY_LINKED	The specified context is already attached to another object.
0x801F0020 ERROR_FLT_NO_WAITER_FOR_REPLY	No waiter is present for the filter's reply to this message.
0x80260001 ERROR_HUNG_DISPLAY_DRIVER_THREAD	{Display Driver Stopped Responding} The %hs display driver has stopped working normally. Save your work and reboot the system to restore full display functionality. The next time you reboot the machine a dialog will be displayed giving you a chance to report this failure to Microsoft.
0x80261001 ERROR_MONITOR_NO_DESCRIPTOR	Monitor descriptor could not be obtained.
0x80261002 ERROR_MONITOR_UNKNOWN_DESCRIPTOR_FORMAT	Format of the obtained monitor descriptor is not supported by this release.
0x80263001 DWM_E_COMPOSITIONDISABLED	{Desktop Composition is Disabled} The operation could not be completed because desktop composition is disabled.
0x80263002	{Some Desktop Composition APIs Are Not Supported While

Return value/code	Description
DWM_E_REMOTING_NOT_SUPPORTED	Remoting} Some desktop composition APIs are not supported while remoting. The operation is not supported while running in a remote session.
0x80263003 DWM_E_NO_REDIRECTION_SURFACE_AVAILABLE	{No DWM Redirection Surface is Available} The Desktop Window Manager (DWM) was unable to provide a redirection surface to complete the DirectX present.
0x80263004 DWM_E_NOT_QUEUING_PRESENTS	{DWM Is Not Queuing Presents for the Specified Window} The window specified is not currently using queued presents.
0x80280000 TPM_E_ERROR_MASK	This is an error mask to convert Trusted Platform Module (TPM) hardware errors to Win32 errors.
0x80280001 TPM_E_AUTHFAIL	Authentication failed.
0x80280002 TPM_E_BADINDEX	The index to a Platform Configuration Register (PCR), DIR, or other register is incorrect.
0x80280003 TPM_E_BAD_PARAMETER	One or more parameters are bad.
0x80280004 TPM_E_AUDITFAILURE	An operation completed successfully but the auditing of that operation failed.
0x80280005 TPM_E_CLEAR_DISABLED	The clear disable flag is set and all clear operations now require physical access.
0x80280006 TPM_E_DEACTIVATED	The TPM is deactivated.
0x80280007 TPM_E_DISABLED	The TPM is disabled.
0x80280008 TPM_E_DISABLED_CMD	The target command has been disabled.
0x80280009 TPM_E_FAIL	The operation failed.
0x8028000A TPM_E_BAD_ORDINAL	The ordinal was unknown or inconsistent.
0x8028000B TPM_E_INSTALL_DISABLED	The ability to install an owner is disabled.

Return value/code	Description
0x8028000C TPM_E_INVALID_KEYHANDLE	The key handle cannot be interpreted.
0x8028000D TPM_E_KEYNOTFOUND	The key handle points to an invalid key.
0x8028000E TPM_E_INAPPROPRIATE_ENC	Unacceptable encryption scheme.
0x8028000F TPM_E_MIGRATEFAIL	Migration authorization failed.
0x80280010 TPM_E_INVALID_PCR_INFO	PCR information could not be interpreted.
0x80280011 TPM_E_NOSPACE	No room to load key.
0x80280012 TPM_E_NOSRK	There is no storage root key (SRK) set.
0x80280013 TPM_E_NOTSEALED_BLOB	An encrypted blob is invalid or was not created by this TPM.
0x80280014 TPM_E_OWNER_SET	There is already an owner.
0x80280015 TPM_E_RESOURCES	The TPM has insufficient internal resources to perform the requested action.
0x80280016 TPM_E_SHORTRANDOM	A random string was too short.
0x80280017 TPM_E_SIZE	The TPM does not have the space to perform the operation.
0x80280018 TPM_E_WRONGPCRVAL	The named PCR value does not match the current PCR value.
0x80280019 TPM_E_BAD_PARAM_SIZE	The <i>paramSize</i> argument to the command has the incorrect value.
0x8028001A TPM_E_SHA_THREAD	There is no existing SHA-1 thread.
0x8028001B TPM_E_SHA_ERROR	The calculation is unable to proceed because the existing SHA-1 thread has already encountered an error.
0x8028001C TPM_E_FAILEDSELFTEST	Self-test has failed and the TPM has shut down.
0x8028001D TPM_E_AUTH2FAIL	The authorization for the second key in a two-key function failed authorization.

<b>Return value/code</b>	<b>Description</b>
0x8028001E TPM_E_BADTAG	The tag value sent to for a command is invalid.
0x8028001F TPM_E_IOERROR	An I/O error occurred transmitting information to the TPM.
0x80280020 TPM_E_ENCRYPT_ERROR	The encryption process had a problem.
0x80280021 TPM_E_DECRYPT_ERROR	The decryption process did not complete.
0x80280022 TPM_E_INVALID_AUTHHANDLE	An invalid handle was used.
0x80280023 TPM_E_NO_ENDORSEMENT	The TPM does not have an endorsement key (EK) installed.
0x80280024 TPM_E_INVALID_KEYUSAGE	The usage of a key is not allowed.
0x80280025 TPM_E_WRONG_ENTITYTYPE	The submitted entity type is not allowed.
0x80280026 TPM_E_INVALID_POSTINIT	The command was received in the wrong sequence relative to TPM_Init and a subsequent TPM_Startup.
0x80280027 TPM_E_INAPPROPRIATE_SIG	Signed data cannot include additional DER information.
0x80280028 TPM_E_BAD_KEY_PROPERTY	The key properties in TPM_KEY_PARMS are not supported by this TPM.
0x80280029 TPM_E_BAD_MIGRATION	The migration properties of this key are incorrect.
0x8028002A TPM_E_BAD_SCHEME	The signature or encryption scheme for this key is incorrect or not permitted in this situation.
0x8028002B TPM_E_BAD_DATASIZE	The size of the data (or blob) parameter is bad or inconsistent with the referenced key.
0x8028002C TPM_E_BAD_MODE	A mode parameter is bad, such as capArea or subCapArea for TPM_GetCapability, physicalPresence parameter for TPM_PhysicalPresence, or migrationType for TPM_CreateMigrationBlob.
0x8028002D TPM_E_BAD_PRESENCE	Either the physicalPresence or physicalPresenceLock bits have the wrong value.

<b>Return value/code</b>	<b>Description</b>
0x8028002E TPM_E_BAD_VERSION	The TPM cannot perform this version of the capability.
0x8028002F TPM_E_NO_WRAP_TRANSPORT	The TPM does not allow for wrapped transport sessions.
0x80280030 TPM_E_AUDITFAIL_UNSUCCESSFUL	TPM audit construction failed and the underlying command was returning a failure code also.
0x80280031 TPM_E_AUDITFAIL_SUCCESSFUL	TPM audit construction failed and the underlying command was returning success.
0x80280032 TPM_E_NOTRESETABLE	Attempt to reset a PCR that does not have the resettable attribute.
0x80280033 TPM_E_NOTLOCAL	Attempt to reset a PCR register that requires locality and the locality modifier not part of command transport.
0x80280034 TPM_E_BAD_TYPE	Make identity blob not properly typed.
0x80280035 TPM_E_INVALID_RESOURCE	When saving context identified resource type does not match actual resource.
0x80280036 TPM_E_NOTFIPS	The TPM is attempting to execute a command only available when in Federal Information Processing Standards (FIPS) mode.
0x80280037 TPM_E_INVALID_FAMILY	The command is attempting to use an invalid family ID.
0x80280038 TPM_E_NO_NV_PERMISSION	The permission to manipulate the NV storage is not available.
0x80280039 TPM_E_REQUIRES_SIGN	The operation requires a signed command.
0x8028003A TPM_E_KEY_NOTSUPPORTED	Wrong operation to load an NV key.
0x8028003B TPM_E_AUTH_CONFLICT	NV_LoadKey blob requires both owner and blob authorization.
0x8028003C TPM_E_AREA_LOCKED	The NV area is locked and not writable.
0x8028003D TPM_E_BAD_LOCALITY	The locality is incorrect for the attempted operation.
0x8028003E	The NV area is read-only and

<b>Return value/code</b>	<b>Description</b>
TPM_E_READ_ONLY	cannot be written to.
0x8028003F TPM_E_PER_NOWRITE	There is no protection on the write to the NV area.
0x80280040 TPM_E_FAMILYCOUNT	The family count value does not match.
0x80280041 TPM_E_WRITE_LOCKED	The NV area has already been written to.
0x80280042 TPM_E_BAD_ATTRIBUTES	The NV area attributes conflict.
0x80280043 TPM_E_INVALID_STRUCTURE	The structure tag and version are invalid or inconsistent.
0x80280044 TPM_E_KEY_OWNER_CONTROL	The key is under control of the TPM owner and can only be evicted by the TPM owner.
0x80280045 TPM_E_BAD_COUNTER	The counter handle is incorrect.
0x80280046 TPM_E_NOT_FULLWRITE	The write is not a complete write of the area.
0x80280047 TPM_E_CONTEXT_GAP	The gap between saved context counts is too large.
0x80280048 TPM_E_MAXNVWRITES	The maximum number of NV writes without an owner has been exceeded.
0x80280049 TPM_E_NOOPERATOR	No operator AuthData value is set.
0x8028004A TPM_E_RESOURCEMISSING	The resource pointed to by context is not loaded.
0x8028004B TPM_E_DELEGATE_LOCK	The delegate administration is locked.
0x8028004C TPM_E_DELEGATE_FAMILY	Attempt to manage a family other than the delegated family.
0x8028004D TPM_E_DELEGATE_ADMIN	Delegation table management not enabled.
0x8028004E TPM_E_TRANSPORT_NOTEXCLUSIVE	There was a command executed outside an exclusive transport session.
0x8028004F TPM_E_OWNER_CONTROL	Attempt to context save an owner evict controlled key.
0x80280050 TPM_E_DAA_RESOURCES	The DAA command has no resources available to execute the command.

<b>Return value/code</b>	<b>Description</b>
0x80280051 TPM_E_DAA_INPUT_DATA0	The consistency check on DAA parameter inputData0 has failed.
0x80280052 TPM_E_DAA_INPUT_DATA1	The consistency check on DAA parameter inputData1 has failed.
0x80280053 TPM_E_DAA_ISSUER_SETTINGS	The consistency check on DAA_issuerSettings has failed.
0x80280054 TPM_E_DAA_TPM_SETTINGS	The consistency check on DAA_tpmSpecific has failed.
0x80280055 TPM_E_DAA_STAGE	The atomic process indicated by the submitted DAA command is not the expected process.
0x80280056 TPM_E_DAA_ISSUER_VALIDITY	The issuer's validity check has detected an inconsistency.
0x80280057 TPM_E_DAA_WRONG_W	The consistency check on w has failed.
0x80280058 TPM_E_BAD_HANDLE	The handle is incorrect.
0x80280059 TPM_E_BAD_DELEGATE	Delegation is not correct.
0x8028005A TPM_E_BADCONTEXT	The context blob is invalid.
0x8028005B TPM_E_TOOMANYCONTEXTS	Too many contexts held by the TPM.
0x8028005C TPM_E_MA_TICKET_SIGNATURE	Migration authority signature validation failure.
0x8028005D TPM_E_MA_DESTINATION	Migration destination not authenticated.
0x8028005E TPM_E_MA_SOURCE	Migration source incorrect.
0x8028005F TPM_E_MA_AUTHORITY	Incorrect migration authority.
0x80280061 TPM_E_PERMANENTEK	Attempt to revoke the EK and the EK is not revocable.
0x80280062 TPM_E_BAD_SIGNATURE	Bad signature of CMK ticket.
0x80280063 TPM_E_NOCONTEXTSPACE	There is no room in the context list for additional contexts.
0x80280400	The command was blocked.

<b>Return value/code</b>	<b>Description</b>
TPM_E_COMMAND_BLOCKED	
0x80280401 TPM_E_INVALID_HANDLE	The specified handle was not found.
0x80280402 TPM_E_DUPLICATE_VHANDLE	The TPM returned a duplicate handle and the command needs to be resubmitted.
0x80280403 TPM_E_EMBEDDED_COMMAND_BLOCKED	The command within the transport was blocked.
0x80280404 TPM_E_EMBEDDED_COMMAND_UNSUPPORTED	The command within the transport is not supported.
0x80280800 TPM_E_RETRY	The TPM is too busy to respond to the command immediately, but the command could be resubmitted at a later time.
0x80280801 TPM_E_NEEDS_SELFTEST	SelfTestFull has not been run.
0x80280802 TPM_E_DOING_SELFTEST	The TPM is currently executing a full self-test.
0x80280803 TPM_E_DEFEND_LOCK_RUNNING	The TPM is defending against dictionary attacks and is in a time-out period.
0x80284001 TBS_E_INTERNAL_ERROR	An internal software error has been detected.
0x80284002 TBS_E_BAD_PARAMETER	One or more input parameters are bad.
0x80284003 TBS_E_INVALID_OUTPUT_POINTER	A specified output pointer is bad.
0x80284004 TBS_E_INVALID_CONTEXT	The specified context handle does not refer to a valid context.
0x80284005 TBS_E_INSUFFICIENT_BUFFER	A specified output buffer is too small.
0x80284006 TBS_E_IOERROR	An error occurred while communicating with the TPM.
0x80284007 TBS_E_INVALID_CONTEXT_PARAM	One or more context parameters are invalid.
0x80284008 TBS_E_SERVICE_NOT_RUNNING	The TPM Base Services (TBS) is not running and could not be started.
0x80284009 TBS_E_TOO_MANY_TBS_CONTEXTS	A new context could not be created because there are too many open contexts.

<b>Return value/code</b>	<b>Description</b>
0x8028400A TBS_E_TOO_MANY_RESOURCES	A new virtual resource could not be created because there are too many open virtual resources.
0x8028400B TBS_E_SERVICE_START_PENDING	The TBS service has been started but is not yet running.
0x8028400C TBS_E_PPI_NOT_SUPPORTED	The physical presence interface is not supported.
0x8028400D TBS_E_COMMAND_CANCELED	The command was canceled.
0x8028400E TBS_E_BUFFER_TOO_LARGE	The input or output buffer is too large.
0x80290100 TPMAPI_E_INVALID_STATE	The command buffer is not in the correct state.
0x80290101 TPMAPI_E_NOT_ENOUGH_DATA	The command buffer does not contain enough data to satisfy the request.
0x80290102 TPMAPI_E_TOO_MUCH_DATA	The command buffer cannot contain any more data.
0x80290103 TPMAPI_E_INVALID_OUTPUT_POINTER	One or more output parameters was null or invalid.
0x80290104 TPMAPI_E_INVALID_PARAMETER	One or more input parameters are invalid.
0x80290105 TPMAPI_E_OUT_OF_MEMORY	Not enough memory was available to satisfy the request.
0x80290106 TPMAPI_E_BUFFER_TOO_SMALL	The specified buffer was too small.
0x80290107 TPMAPI_E_INTERNAL_ERROR	An internal error was detected.
0x80290108 TPMAPI_E_ACCESS_DENIED	The caller does not have the appropriate rights to perform the requested operation.
0x80290109 TPMAPI_E_AUTHORIZATION_FAILED	The specified authorization information was invalid.
0x8029010A TPMAPI_E_INVALID_CONTEXT_HANDLE	The specified context handle was not valid.
0x8029010B TPMAPI_E_TBS_COMMUNICATION_ERROR	An error occurred while communicating with the TBS.
0x8029010C TPMAPI_E_TPM_COMMAND_ERROR	The TPM returned an unexpected result.

<b>Return value/code</b>	<b>Description</b>
0x8029010D TPMAPI_E_MESSAGE_TOO_LARGE	The message was too large for the encoding scheme.
0x8029010E TPMAPI_E_INVALID_ENCODING	The encoding in the binary large object (BLOB) was not recognized.
0x8029010F TPMAPI_E_INVALID_KEY_SIZE	The key size is not valid.
0x80290110 TPMAPI_E_ENCRYPTION_FAILED	The encryption operation failed.
0x80290111 TPMAPI_E_INVALID_KEY_PARAMS	The key parameters structure was not valid.
0x80290112 TPMAPI_E_INVALID_MIGRATION_AUTHORIZATION_BLOB	The requested supplied data does not appear to be a valid migration authorization BLOB.
0x80290113 TPMAPI_E_INVALID_PCR_INDEX	The specified PCR index was invalid.
0x80290114 TPMAPI_E_INVALID_DELEGATE_BLOB	The data given does not appear to be a valid delegate BLOB.
0x80290115 TPMAPI_E_INVALID_CONTEXT_PARAMS	One or more of the specified context parameters was not valid.
0x80290116 TPMAPI_E_INVALID_KEY_BLOB	The data given does not appear to be a valid key BLOB.
0x80290117 TPMAPI_E_INVALID_PCR_DATA	The specified PCR data was invalid.
0x80290118 TPMAPI_E_INVALID_OWNER_AUTH	The format of the owner authorization data was invalid.
0x80290200 TBSIMP_E_BUFFER_TOO_SMALL	The specified buffer was too small.
0x80290201 TBSIMP_E_CLEANUP_FAILED	The context could not be cleaned up.
0x80290202 TBSIMP_E_INVALID_CONTEXT_HANDLE	The specified context handle is invalid.
0x80290203 TBSIMP_E_INVALID_CONTEXT_PARAM	An invalid context parameter was specified.
0x80290204 TBSIMP_E_TPM_ERROR	An error occurred while communicating with the TPM.
0x80290205 TBSIMP_E_HASH_BAD_KEY	No entry with the specified key was found.
0x80290206	The specified virtual handle

<b>Return value/code</b>	<b>Description</b>
TBSIMP_E_DUPLICATE_VHANDLE	matches a virtual handle already in use.
0x80290207 TBSIMP_E_INVALID_OUTPUT_POINTER	The pointer to the returned handle location was null or invalid.
0x80290208 TBSIMP_E_INVALID_PARAMETER	One or more parameters are invalid.
0x80290209 TBSIMP_E_RPC_INIT_FAILED	The RPC subsystem could not be initialized.
0x8029020A TBSIMP_E_SCHEDULER_NOT_RUNNING	The TBS scheduler is not running.
0x8029020B TBSIMP_E_COMMAND_CANCELED	The command was canceled.
0x8029020C TBSIMP_E_OUT_OF_MEMORY	There was not enough memory to fulfill the request.
0x8029020D TBSIMP_E_LIST_NO_MORE_ITEMS	The specified list is empty, or the iteration has reached the end of the list.
0x8029020E TBSIMP_E_LIST_NOT_FOUND	The specified item was not found in the list.
0x8029020F TBSIMP_E_NOT_ENOUGH_SPACE	The TPM does not have enough space to load the requested resource.
0x80290210 TBSIMP_E_NOT_ENOUGH_TPM_CONTEXTS	There are too many TPM contexts in use.
0x80290211 TBSIMP_E_COMMAND_FAILED	The TPM command failed.
0x80290212 TBSIMP_E_UNKNOWN_ORDINAL	The TBS does not recognize the specified ordinal.
0x80290213 TBSIMP_E_RESOURCE_EXPIRED	The requested resource is no longer available.
0x80290214 TBSIMP_E_INVALID_RESOURCE	The resource type did not match.
0x80290215 TBSIMP_E_NOTHING_TO_UNLOAD	No resources can be unloaded.
0x80290216 TBSIMP_E_HASH_TABLE_FULL	No new entries can be added to the hash table.
0x80290217 TBSIMP_E_TOO_MANY_TBS_CONTEXTS	A new TBS context could not be created because there are too many open contexts.
0x80290218	A new virtual resource could not

<b>Return value/code</b>	<b>Description</b>
TBSIMP_E_TOO_MANY_RESOURCES	be created because there are too many open virtual resources.
0x80290219 TBSIMP_E_PPI_NOT_SUPPORTED	The physical presence interface is not supported.
0x8029021A TBSIMP_E_TPM_INCOMPATIBLE	TBS is not compatible with the version of TPM found on the system.
0x80290300 TPM_E_PPI_ACPI_FAILURE	A general error was detected when attempting to acquire the BIOS response to a physical presence command.
0x80290301 TPM_E_PPI_USER_ABORT	The user failed to confirm the TPM operation request.
0x80290302 TPM_E_PPI_BIOS_FAILURE	The BIOS failure prevented the successful execution of the requested TPM operation (for example, invalid TPM operation request, BIOS communication error with the TPM).
0x80290303 TPM_E_PPI_NOT_SUPPORTED	The BIOS does not support the physical presence interface.
0x80300002 PLA_E_DCS_NOT_FOUND	A Data Collector Set was not found.
0x80300045 PLA_E_TOO_MANY_FOLDERS	Unable to start Data Collector Set because there are too many folders.
0x80300070 PLA_E_NO_MIN_DISK	Not enough free disk space to start Data Collector Set.
0x803000AA PLA_E_DCS_IN_USE	Data Collector Set is in use.
0x803000B7 PLA_E_DCS_ALREADY_EXISTS	Data Collector Set already exists.
0x80300101 PLA_E_PROPERTY_CONFLICT	Property value conflict.
0x80300102 PLA_E_DCS_SINGLETON_REQUIRED	The current configuration for this Data Collector Set requires that it contain exactly one Data Collector.
0x80300103 PLA_E_CREDENTIALS_REQUIRED	A user account is required to commit the current Data Collector Set properties.
0x80300104 PLA_E_DCS_NOT_RUNNING	Data Collector Set is not running.

<b>Return value/code</b>	<b>Description</b>
0x80300105 PLA_E_CONFLICT_INCL_EXCL_API	A conflict was detected in the list of include and exclude APIs. Do not specify the same API in both the include list and the exclude list.
0x80300106 PLA_E_NETWORK_EXE_NOT_VALID	The executable path specified refers to a network share or UNC path.
0x80300107 PLA_E_EXE_ALREADY_CONFIGURED	The executable path specified is already configured for API tracing.
0x80300108 PLA_E_EXE_PATH_NOT_VALID	The executable path specified does not exist. Verify that the specified path is correct.
0x80300109 PLA_E_DC_ALREADY_EXISTS	Data Collector already exists.
0x8030010A PLA_E_DCS_START_WAIT_TIMEOUT	The wait for the Data Collector Set start notification has timed out.
0x8030010B PLA_E_DC_START_WAIT_TIMEOUT	The wait for the Data Collector to start has timed out.
0x8030010C PLA_E_REPORT_WAIT_TIMEOUT	The wait for the report generation tool to finish has timed out.
0x8030010D PLA_E_NO_DUPLICATES	Duplicate items are not allowed.
0x8030010E PLA_E_EXE_FULL_PATH_REQUIRED	When specifying the executable to trace, you must specify a full path to the executable and not just a file name.
0x8030010F PLA_E_INVALID_SESSION_NAME	The session name provided is invalid.
0x80300110 PLA_E_PLA_CHANNEL_NOT_ENABLED	The Event Log channel Microsoft-Windows-Diagnosis-PLA/Operational must be enabled to perform this operation.
0x80300111 PLA_E_TASKSCHED_CHANNEL_NOT_ENABLED	The Event Log channel Microsoft-Windows-TaskScheduler must be enabled to perform this operation.
0x80310000 FVE_E_LOCKED_VOLUME	The volume must be unlocked before it can be used.
0x80310001 FVE_E_NOT_ENCRYPTED	The volume is fully decrypted and no key is available.
0x80310002	The firmware does not support

<b>Return value/code</b>	<b>Description</b>
FVE_E_NO_TPM_BIOS	using a TPM during boot.
0x80310003 FVE_E_NO_MBR_METRIC	The firmware does not use a TPM to perform initial program load (IPL) measurement.
0x80310004 FVE_E_NO_BOOTSECTOR_METRIC	The master boot record (MBR) is not TPM-aware.
0x80310005 FVE_E_NO_BOOTMGR_METRIC	The BOOTMGR is not being measured by the TPM.
0x80310006 FVE_E_WRONG_BOOTMGR	The BOOTMGR component does not perform expected TPM measurements.
0x80310007 FVE_E_SECURE_KEY_REQUIRED	No secure key protection mechanism has been defined.
0x80310008 FVE_E_NOT_ACTIVATED	This volume has not been provisioned for encryption.
0x80310009 FVE_E_ACTION_NOT_ALLOWED	Requested action was denied by the full-volume encryption (FVE) control engine.
0x8031000A FVE_E_AD_SCHEMA_NOT_INSTALLED	The Active Directory forest does not contain the required attributes and classes to host FVE or TPM information.
0x8031000B FVE_E_AD_INVALID_DATATYPE	The type of data obtained from Active Directory was not expected.
0x8031000C FVE_E_AD_INVALID_DATASIZE	The size of the data obtained from Active Directory was not expected.
0x8031000D FVE_E_AD_NO_VALUES	The attribute read from Active Directory has no (zero) values.
0x8031000E FVE_E_AD_ATTR_NOT_SET	The attribute was not set.
0x8031000F FVE_E_AD_GUID_NOT_FOUND	The specified GUID could not be found.
0x80310010 FVE_E_BAD_INFORMATION	The control block for the encrypted volume is not valid.
0x80310011 FVE_E_TOO_SMALL	Not enough free space remaining on volume to allow encryption.
0x80310012 FVE_E_SYSTEM_VOLUME	The volume cannot be encrypted because it is required to boot the operating system.
0x80310013	The volume cannot be encrypted because the file

<b>Return value/code</b>	<b>Description</b>
FVE_E_FAILED_WRONG_FS	system is not supported.
0x80310014 FVE_E_FAILED_BAD_FS	The file system is inconsistent. Run CHKDSK.
0x80310015 FVE_E_NOT_SUPPORTED	This volume cannot be encrypted.
0x80310016 FVE_E_BAD_DATA	Data supplied is malformed.
0x80310017 FVE_E_VOLUME_NOT_BOUND	Volume is not bound to the system.
0x80310018 FVE_E_TPM_NOT_OWNED	TPM must be owned before a volume can be bound to it.
0x80310019 FVE_E_NOT_DATA_VOLUME	The volume specified is not a data volume.
0x8031001A FVE_E_AD_INSUFFICIENT_BUFFER	The buffer supplied to a function was insufficient to contain the returned data.
0x8031001B FVE_E_CONV_READ	A read operation failed while converting the volume.
0x8031001C FVE_E_CONV_WRITE	A write operation failed while converting the volume.
0x8031001D FVE_E_KEY_REQUIRED	One or more key protection mechanisms are required for this volume.
0x8031001E FVE_E_CLUSTERING_NOT_SUPPORTED	Cluster configurations are not supported.
0x8031001F FVE_E_VOLUME_BOUND_ALREADY	The volume is already bound to the system.
0x80310020 FVE_E_OS_NOT_PROTECTED	The boot OS volume is not being protected via FVE.
0x80310021 FVE_E_PROTECTION_DISABLED	All protection mechanisms are effectively disabled (clear key exists).
0x80310022 FVE_E_RECOVERY_KEY_REQUIRED	A recovery key protection mechanism is required.
0x80310023 FVE_E_FOREIGN_VOLUME	This volume cannot be bound to a TPM.
0x80310024 FVE_E_OVERLAPPED_UPDATE	The control block for the encrypted volume was updated by another thread. Try again.
0x80310025 FVE_E_TPM_SRK_AUTH_NOT_ZERO	The SRK authentication of the TPM is not zero and, therefore,

Return value/code	Description
	is not compatible.
0x80310026 FVE_E_FAILED_SECTOR_SIZE	The volume encryption algorithm cannot be used on this sector size.
0x80310027 FVE_E_FAILED_AUTHENTICATION	BitLocker recovery authentication failed.
0x80310028 FVE_E_NOT_OS_VOLUME	The volume specified is not the boot OS volume.
0x80310029 FVE_E_AUTOUNLOCK_ENABLED	Auto-unlock information for data volumes is present on the boot OS volume.
0x8031002A FVE_E_WRONG_BOOTSECTOR	The system partition boot sector does not perform TPM measurements.
0x8031002B FVE_E_WRONG_SYSTEM_FS	The system partition file system must be NTFS.
0x8031002C FVE_E_POLICY_PASSWORD_REQUIRED	Group policy requires a recovery password before encryption <a href="#">may</a> begin.
0x8031002D FVE_E_CANNOT_SET_FVEK_ENCRYPTED	The volume encryption algorithm and key cannot be set on an encrypted volume.
0x8031002E FVE_E_CANNOT_ENCRYPT_NO_KEY	A key must be specified before encryption <a href="#">may</a> begin.
0x80310030 FVE_E_BOOTABLE_CDDVD	A bootable CD/DVD is in the system. Remove the CD/DVD and reboot the system.
0x80310031 FVE_E_PROTECTOR_EXISTS	An instance of this key protector already exists on the volume.
0x80310032 FVE_E_RELATIVE_PATH	The file cannot be saved to a relative path.
0x80320001 FWP_E_CALLOUT_NOT_FOUND	The callout does not exist.
0x80320002 FWP_E_CONDITION_NOT_FOUND	The filter condition does not exist.
0x80320003 FWP_E_FILTER_NOT_FOUND	The filter does not exist.
0x80320004 FWP_E_LAYER_NOT_FOUND	The layer does not exist.
0x80320005 FWP_E_PROVIDER_NOT_FOUND	The provider does not exist.

<b>Return value/code</b>	<b>Description</b>
0x80320006 FWP_E_PROVIDER_CONTEXT_NOT_FOUND	The provider context does not exist.
0x80320007 FWP_E_SUBLAYER_NOT_FOUND	The sublayer does not exist.
0x80320008 FWP_E_NOT_FOUND	The object does not exist.
0x80320009 FWP_E_ALREADY_EXISTS	An object with that GUID or LUID already exists.
0x8032000A FWP_E_IN_USE	The object is referenced by other objects and, therefore, cannot be deleted.
0x8032000B FWP_E_DYNAMIC_SESSION_IN_PROGRESS	The call is not allowed from within a dynamic session.
0x8032000C FWP_E_WRONG_SESSION	The call was made from the wrong session and, therefore, cannot be completed.
0x8032000D FWP_E_NO_TXN_IN_PROGRESS	The call must be made from within an explicit transaction.
0x8032000E FWP_E_TXN_IN_PROGRESS	The call is not allowed from within an explicit transaction.
0x8032000F FWP_E_TXN_ABORTED	The explicit transaction has been forcibly canceled.
0x80320010 FWP_E_SESSION_ABORTED	The session has been canceled.
0x80320011 FWP_E_INCOMPATIBLE_TXN	The call is not allowed from within a read-only transaction.
0x80320012 FWP_E_TIMEOUT	The call timed out while waiting to acquire the transaction lock.
0x80320013 FWP_E_NET_EVENTS_DISABLED	Collection of network diagnostic events is disabled.
0x80320014 FWP_E_INCOMPATIBLE_LAYER	The operation is not supported by the specified layer.
0x80320015 FWP_E_KM_CLIENTS_ONLY	The call is allowed for kernel-mode callers only.
0x80320016 FWP_E_LIFETIME_MISMATCH	The call tried to associate two objects with incompatible lifetimes.
0x80320017 FWP_E_BUILTIN_OBJECT	The object is built in and, therefore, cannot be deleted.
0x80320018	The maximum number of boot-

Return value/code	Description
FWP_E_TOO_MANY_BOOTTIME_FILTERS	time filters has been reached.
0x80320019 FWP_E_NOTIFICATION_DROPPED	A notification could not be delivered because a message queue is at its maximum capacity.
0x8032001A FWP_E_TRAFFIC_MISMATCH	The traffic parameters do not match those for the security association context.
0x8032001B FWP_E_INCOMPATIBLE_SA_STATE	The call is not allowed for the current security association state.
0x8032001C FWP_E_NULL_POINTER	A required pointer is null.
0x8032001D FWP_E_INVALID_ENUMERATOR	An enumerator is not valid.
0x8032001E FWP_E_INVALID_FLAGS	The flags field contains an invalid value.
0x8032001F FWP_E_INVALID_NET_MASK	A network mask is not valid.
0x80320020 FWP_E_INVALID_RANGE	An FWP_RANGE is not valid.
0x80320021 FWP_E_INVALID_INTERVAL	The time interval is not valid.
0x80320022 FWP_E_ZERO_LENGTH_ARRAY	An array that must contain at least one element that is zero-length.
0x80320023 FWP_E_NULL_DISPLAY_NAME	The <b>displayData.name</b> field cannot be null.
0x80320024 FWP_E_INVALID_ACTION_TYPE	The action type is not one of the allowed action types for a filter.
0x80320025 FWP_E_INVALID_WEIGHT	The filter weight is not valid.
0x80320026 FWP_E_MATCH_TYPE_MISMATCH	A filter condition contains a match type that is not compatible with the operands.
0x80320027 FWP_E_TYPE_MISMATCH	An FWP_VALUE or FWPM_CONDITION_VALUE is of the wrong type.
0x80320028 FWP_E_OUT_OF_BOUNDS	An integer value is outside the allowed range.
0x80320029 FWP_E_RESERVED	A reserved field is nonzero.

<b>Return value/code</b>	<b>Description</b>
0x8032002A FWP_E_DUPLICATE_CONDITION	A filter cannot contain multiple conditions operating on a single field.
0x8032002B FWP_E_DUPLICATE_KEYMOD	A policy cannot contain the same keying module more than once.
0x8032002C FWP_E_ACTION_INCOMPATIBLE_WITH_LAYER	The action type is not compatible with the layer.
0x8032002D FWP_E_ACTION_INCOMPATIBLE_WITH_SUBLAYER	The action type is not compatible with the sublayer.
0x8032002E FWP_E_CONTEXT_INCOMPATIBLE_WITH_LAYER	The raw context or the provider context is not compatible with the layer.
0x8032002F FWP_E_CONTEXT_INCOMPATIBLE_WITH_CALLOUT	The raw context or the provider context is not compatible with the callout.
0x80320030 FWP_E_INCOMPATIBLE_AUTH_METHOD	The authentication method is not compatible with the policy type.
0x80320031 FWP_E_INCOMPATIBLE_DH_GROUP	The Diffie-Hellman group is not compatible with the policy type.
0x80320032 FWP_E_EM_NOT_SUPPORTED	An Internet Key Exchange (IKE) policy cannot contain an Extended Mode policy.
0x80320033 FWP_E_NEVER_MATCH	The enumeration template or subscription will never match any objects.
0x80320034 FWP_E_PROVIDER_CONTEXT_MISMATCH	The provider context is of the wrong type.
0x80320035 FWP_E_INVALID_PARAMETER	The parameter is incorrect.
0x80320036 FWP_E_TOO_MANY_SUBLAYERS	The maximum number of sublayers has been reached.
0x80320037 FWP_E_CALLOUT_NOTIFICATION_FAILED	The notification function for a callout returned an error.
0x80320038 FWP_E_INCOMPATIBLE_AUTH_CONFIG	The IPsec authentication configuration is not compatible with the authentication type.
0x80320039 FWP_E_INCOMPATIBLE_CIPHER_CONFIG	The IPsec cipher configuration is not compatible with the cipher type.
0x80340002 ERROR_NDIS_INTERFACE_CLOSING	The binding to the network interface is being closed.

<b>Return value/code</b>	<b>Description</b>
0x80340004 ERROR_NDIS_BAD_VERSION	An invalid version was specified.
0x80340005 ERROR_NDIS_BAD_CHARACTERISTICS	An invalid characteristics table was used.
0x80340006 ERROR_NDIS_ADAPTER_NOT_FOUND	Failed to find the network interface, or the network interface is not ready.
0x80340007 ERROR_NDIS_OPEN_FAILED	Failed to open the network interface.
0x80340008 ERROR_NDIS_DEVICE_FAILED	The network interface has encountered an internal unrecoverable failure.
0x80340009 ERROR_NDIS_MULTICAST_FULL	The multicast list on the network interface is full.
0x8034000A ERROR_NDIS_MULTICAST_EXISTS	An attempt was made to add a duplicate multicast address to the list.
0x8034000B ERROR_NDIS_MULTICAST_NOT_FOUND	At attempt was made to remove a multicast address that was never added.
0x8034000C ERROR_NDIS_REQUEST_ABORTED	The network interface aborted the request.
0x8034000D ERROR_NDIS_RESET_IN_PROGRESS	The network interface cannot process the request because it is being reset.
0x8034000F ERROR_NDIS_INVALID_PACKET	An attempt was made to send an invalid packet on a network interface.
0x80340010 ERROR_NDIS_INVALID_DEVICE_REQUEST	The specified request is not a valid operation for the target device.
0x80340011 ERROR_NDIS_ADAPTER_NOT_READY	The network interface is not ready to complete this operation.
0x80340014 ERROR_NDIS_INVALID_LENGTH	The length of the buffer submitted for this operation is not valid.
0x80340015 ERROR_NDIS_INVALID_DATA	The data used for this operation is not valid.
0x80340016 ERROR_NDIS_BUFFER_TOO_SHORT	The length of the buffer submitted for this operation is too small.
0x80340017 ERROR_NDIS_INVALID_OID	The network interface does not support this OID.

<b>Return value/code</b>	<b>Description</b>
0x80340018 ERROR_NDIS_ADAPTER_REMOVED	The network interface has been removed.
0x80340019 ERROR_NDIS_UNSUPPORTED_MEDIA	The network interface does not support this media type.
0x8034001A ERROR_NDIS_GROUP_ADDRESS_IN_USE	An attempt was made to remove a token ring group address that is in use by other components.
0x8034001B ERROR_NDIS_FILE_NOT_FOUND	An attempt was made to map a file that cannot be found.
0x8034001C ERROR_NDIS_ERROR_READING_FILE	An error occurred while the NDIS tried to map the file.
0x8034001D ERROR_NDIS_ALREADY_MAPPED	An attempt was made to map a file that is already mapped.
0x8034001E ERROR_NDIS_RESOURCE_CONFLICT	An attempt to allocate a hardware resource failed because the resource is used by another component.
0x8034001F ERROR_NDIS_MEDIA_DISCONNECTED	The I/O operation failed because network media is disconnected or the wireless access point is out of range.
0x80340022 ERROR_NDIS_INVALID_ADDRESS	The network address used in the request is invalid.
0x8034002A ERROR_NDIS_PAUSED	The offload operation on the network interface has been paused.
0x8034002B ERROR_NDIS_INTERFACE_NOT_FOUND	The network interface was not found.
0x8034002C ERROR_NDIS_UNSUPPORTED_REVISION	The revision number specified in the structure is not supported.
0x8034002D ERROR_NDIS_INVALID_PORT	The specified port does not exist on this network interface.
0x8034002E ERROR_NDIS_INVALID_PORT_STATE	The current state of the specified port on this network interface does not support the requested operation.
0x803400BB ERROR_NDIS_NOT_SUPPORTED	The network interface does not support this request.
0x80342000 ERROR_NDIS_DOT11_AUTO_CONFIG_ENABLED	The wireless local area network (LAN) interface is in auto-configuration mode and does not support the requested parameter change operation.

<b>Return value/code</b>	<b>Description</b>
0x80342001 ERROR_NDIS_DOT11_MEDIA_IN_USE	The wireless LAN interface is busy and cannot perform the requested operation.
0x80342002 ERROR_NDIS_DOT11_POWER_STATE_INVALID	The wireless LAN interface is shutting down and does not support the requested operation.
0x8DEAD01B TRK_E_NOT_FOUND	A requested object was not found.
0x8DEAD01C TRK_E_VOLUME_QUOTA_EXCEEDED	The server received a CREATE_VOLUME subrequest of a SYNC_VOLUMES request, but the ServerVolumeTable size limit for the RequestMachine has already been reached.
0x8DEAD01E TRK_SERVER_TOO_BUSY	The server is busy, and the client should retry the request at a later time.
0xC0090001 ERROR_AUDITING_DISABLED	The specified event is currently not being audited.
0xC0090002 ERROR_ALL_SIDS_FILTERED	The SID filtering operation removed all SIDs.
0xC0090003 ERROR_BIZRULES_NOT_ENABLED	Business rule scripts are disabled for the calling application.
0xC00D0005 NS_E_NOCONNECTION	There is no connection established with the Windows Media server. The operation failed.
0xC00D0006 NS_E_CANNOTCONNECT	Unable to establish a connection to the server.
0xC00D0007 NS_E_CANNOTDESTROYTITLE	Unable to destroy the title.
0xC00D0008 NS_E_CANNOTRENAMETITLE	Unable to rename the title.
0xC00D0009 NS_E_CANNOTOFFLINEDISK	Unable to offline disk.
0xC00D000A NS_E_CANNOTONLINEDISK	Unable to online disk.
0xC00D000B NS_E_NOREGISTEREDWALKER	There is no file parser registered for this type of file.
0xC00D000C NS_E_NOFUNNEL	There is no data connection established.

<b>Return value/code</b>	<b>Description</b>
0xC00D000D NS_E_NO_LOCALPLAY	Failed to load the local play DLL.
0xC00D000E NS_E_NETWORK_BUSY	The network is busy.
0xC00D000F NS_E_TOO_MANY_SESS	The server session limit was exceeded.
0xC00D0010 NS_E_ALREADY_CONNECTED	The network connection already exists.
0xC00D0011 NS_E_INVALID_INDEX	Index %1 is invalid.
0xC00D0012 NS_E_PROTOCOL_MISMATCH	There is no protocol or protocol version supported by both the client and the server.
0xC00D0013 NS_E_TIMEOUT	The server, a computer set up to offer multimedia content to other computers, could not handle your request for multimedia content in a timely manner. Please try again later.
0xC00D0014 NS_E_NET_WRITE	Error writing to the network.
0xC00D0015 NS_E_NET_READ	Error reading from the network.
0xC00D0016 NS_E_DISK_WRITE	Error writing to a disk.
0xC00D0017 NS_E_DISK_READ	Error reading from a disk.
0xC00D0018 NS_E_FILE_WRITE	Error writing to a file.
0xC00D0019 NS_E_FILE_READ	Error reading from a file.
0xC00D001A NS_E_FILE_NOT_FOUND	The system cannot find the file specified.
0xC00D001B NS_E_FILE_EXISTS	The file already exists.
0xC00D001C NS_E_INVALID_NAME	The file name, directory name, or volume label syntax is incorrect.
0xC00D001D NS_E_FILE_OPEN_FAILED	Failed to open a file.
0xC00D001E	Unable to allocate a file.

<b>Return value/code</b>	<b>Description</b>
NS_E_FILE_ALLOCATION_FAILED	
0xC00D001F NS_E_FILE_INIT_FAILED	Unable to initialize a file.
0xC00D0020 NS_E_FILE_PLAY_FAILED	Unable to play a file.
0xC00D0021 NS_E_SET_DISK_UID_FAILED	Could not set the disk UID.
0xC00D0022 NS_E_INDUCED	An error was induced for testing purposes.
0xC00D0023 NS_E_CCLINK_DOWN	Two Content Servers failed to communicate.
0xC00D0024 NS_E_INTERNAL	An unknown error occurred.
0xC00D0025 NS_E_BUSY	The requested resource is in use.
0xC00D0026 NS_E_UNRECOGNIZED_STREAM_TYPE	The specified protocol is not recognized. Be sure that the file name and syntax, such as slashes, are correct for the protocol.
0xC00D0027 NS_E_NETWORK_SERVICE_FAILURE	The network service provider failed.
0xC00D0028 NS_E_NETWORK_RESOURCE_FAILURE	An attempt to acquire a network resource failed.
0xC00D0029 NS_E_CONNECTION_FAILURE	The network connection has failed.
0xC00D002A NS_E_SHUTDOWN	The session is being terminated locally.
0xC00D002B NS_E_INVALID_REQUEST	The request is invalid in the current state.
0xC00D002C NS_E_INSUFFICIENT_BANDWIDTH	There is insufficient bandwidth available to fulfill the request.
0xC00D002D NS_E_NOT_REBUILDING	The disk is not rebuilding.
0xC00D002E NS_E_LATE_OPERATION	An operation requested for a particular time could not be carried out on schedule.
0xC00D002F NS_E_INVALID_DATA	Invalid or corrupt data was encountered.
0xC00D0030	The bandwidth required to stream a file is higher than the

<b>Return value/code</b>	<b>Description</b>
NS_E_FILE_BANDWIDTH_LIMIT	maximum file bandwidth allowed on the server.
0xC00D0031 NS_E_OPEN_FILE_LIMIT	The client cannot have any more files open simultaneously.
0xC00D0032 NS_E_BAD_CONTROL_DATA	The server received invalid data from the client on the control connection.
0xC00D0033 NS_E_NO_STREAM	There is no stream available.
0xC00D0034 NS_E_STREAM_END	There is no more data in the stream.
0xC00D0035 NS_E_SERVER_NOT_FOUND	The specified server could not be found.
0xC00D0036 NS_E_DUPLICATE_NAME	The specified name is already in use.
0xC00D0037 NS_E_DUPLICATE_ADDRESS	The specified address is already in use.
0xC00D0038 NS_E_BAD_MULTICAST_ADDRESS	The specified address is not a valid multicast address.
0xC00D0039 NS_E_BAD_ADAPTER_ADDRESS	The specified adapter address is invalid.
0xC00D003A NS_E_BAD_DELIVERY_MODE	The specified delivery mode is invalid.
0xC00D003B NS_E_INVALID_CHANNEL	The specified station does not exist.
0xC00D003C NS_E_INVALID_STREAM	The specified stream does not exist.
0xC00D003D NS_E_INVALID_ARCHIVE	The specified archive could not be opened.
0xC00D003E NS_E_NOTITLES	The system cannot find any titles on the server.
0xC00D003F NS_E_INVALID_CLIENT	The system cannot find the client specified.
0xC00D0040 NS_E_INVALID_BLACKHOLE_ADDRESS	The Blackhole Address is not initialized.
0xC00D0041 NS_E_INCOMPATIBLE_FORMAT	The station does not support the stream format.
0xC00D0042 NS_E_INVALID_KEY	The specified key is not valid.

<b>Return value/code</b>	<b>Description</b>
0xC00D0043 NS_E_INVALID_PORT	The specified port is not valid.
0xC00D0044 NS_E_INVALID_TTL	The specified TTL is not valid.
0xC00D0045 NS_E_STRIDE_REFUSED	The request to fast forward or rewind could not be fulfilled.
0xC00D0046 NS_E_MMSAUTOSERVER_CANTFINDWALKER	Unable to load the appropriate file parser.
0xC00D0047 NS_E_MAX_BITRATE	Cannot exceed the maximum bandwidth limit.
0xC00D0048 NS_E_LOGFILEPERIOD	Invalid value for LogFilePeriod.
0xC00D0049 NS_E_MAX_CLIENTS	Cannot exceed the maximum client limit.
0xC00D004A NS_E_LOG_FILE_SIZE	The maximum log file size has been reached.
0xC00D004B NS_E_MAX_FILERATE	Cannot exceed the maximum file rate.
0xC00D004C NS_E_WALKER_UNKNOWN	Unknown file type.
0xC00D004D NS_E_WALKER_SERVER	The specified file, %1, cannot be loaded onto the specified server, %2.
0xC00D004E NS_E_WALKER_USAGE	There was a usage error with file parser.
0xC00D0050 NS_E_TIGER_FAIL	The Title Server %1 has failed.
0xC00D0053 NS_E_CUB_FAIL	Content Server %1 (%2) has failed.
0xC00D0055 NS_E_DISK_FAIL	Disk %1 ( %2 ) on Content Server %3, has failed.
0xC00D0060 NS_E_MAX_FUNNELS_ALERT	The NetShow data stream limit of %1 streams was reached.
0xC00D0061 NS_E_ALLOCATE_FILE_FAIL	The NetShow Video Server was unable to allocate a %1 block file named %2.
0xC00D0062 NS_E_PAGING_ERROR	A Content Server was unable to page a block.
0xC00D0063	Disk %1 has unrecognized control block version %2.

<b>Return value/code</b>	<b>Description</b>
NS_E_BAD_BLOCK0_VERSION	
0xC00D0064 NS_E_BAD_DISK_UID	Disk %1 has incorrect uid %2.
0xC00D0065 NS_E_BAD_FSMajor_VERSION	Disk %1 has unsupported file system major version %2.
0xC00D0066 NS_E_BAD_STAMPNUMBER	Disk %1 has bad stamp number in control block.
0xC00D0067 NS_E_PARTIALLY_REBUILT_DISK	Disk %1 is partially reconstructed.
0xC00D0068 NS_E_ENACTPLAN_GIVEUP	EnactPlan gives up.
0xC00D006A MCMADM_E_REGKEY_NOT_FOUND	The key was not found in the registry.
0xC00D006B NS_E_NO_FORMATS	The publishing point cannot be started because the server does not have the appropriate stream formats. Use the Multicast Announcement Wizard to create a new announcement for this publishing point.
0xC00D006C NS_E_NO_REFERENCES	No reference URLs were found in an ASX file.
0xC00D006D NS_E_WAVE_OPEN	Error opening wave device, the device might be in use.
0xC00D006F NS_E_CANNOTCONNECTEVENTS	Unable to establish a connection to the NetShow event monitor service.
0xC00D0071 NS_E_NO_DEVICE	No device driver is present on the system.
0xC00D0072 NS_E_NO_SPECIFIED_DEVICE	No specified device driver is present.
0xC00D00C8 NS_E_MONITOR_GIVEUP	Netshow Events Monitor is not operational and has been disconnected.
0xC00D00C9 NS_E_REMIRRORED_DISK	Disk %1 is remirrored.
0xC00D00CA NS_E_INSUFFICIENT_DATA	Insufficient data found.
0xC00D00CB NS_E_ASSERT	1 failed in file %2 line %3.
0xC00D00CC NS_E_BAD_ADAPTER_NAME	The specified adapter name is invalid.

<b>Return value/code</b>	<b>Description</b>
0xC00D00CD NS_E_NOT_LICENSED	The application is not licensed for this feature.
0xC00D00CE NS_E_NO_SERVER_CONTACT	Unable to contact the server.
0xC00D00CF NS_E_TOO_MANY_TITLES	Maximum number of titles exceeded.
0xC00D00D0 NS_E_TITLE_SIZE_EXCEEDED	Maximum size of a title exceeded.
0xC00D00D1 NS_E_UDP_DISABLED	UDP protocol not enabled. Not trying %1!s!.
0xC00D00D2 NS_E_TCP_DISABLED	TCP protocol not enabled. Not trying %1!s!.
0xC00D00D3 NS_E_HTTP_DISABLED	HTTP protocol not enabled. Not trying %1!s!.
0xC00D00D4 NS_E_LICENSE_EXPIRED	The product license has expired.
0xC00D00D5 NS_E_TITLE_BITRATE	Source file exceeds the per title maximum bitrate. See NetShow Theater documentation for more information.
0xC00D00D6 NS_E_EMPTY_PROGRAM_NAME	The program name cannot be empty.
0xC00D00D7 NS_E_MISSING_CHANNEL	Station %1 does not exist.
0xC00D00D8 NS_E_NO_CHANNELS	You need to define at least one station before this operation can complete.
0xC00D00D9 NS_E_INVALID_INDEX2	The index specified is invalid.
0xC00D0190 NS_E_CUB_FAIL_LINK	Content Server %1 (%2) has failed its link to Content Server %3.
0xC00D0192 NS_E_BAD_CUB_UID	Content Server %1 (%2) has incorrect uid %3.
0xC00D0195 NS_E_GLITCH_MODE	Server unreliable because multiple components failed.
0xC00D019B NS_E_NO_MEDIA_PROTOCOL	Content Server %1 (%2) is unable to communicate with the Media System Network Protocol.
0xC00D07F1 NS_E_NOTHING_TO_DO	Nothing to do.

<b>Return value/code</b>	<b>Description</b>
0xC00D07F2 NS_E_NO_MULTICAST	Not receiving data from the server.
0xC00D0BB8 NS_E_INVALID_INPUT_FORMAT	The input media format is invalid.
0xC00D0BB9 NS_E_MSAUDIO_NOT_INSTALLED	The MSAudio codec is not installed on this system.
0xC00D0BBA NS_E_UNEXPECTED_MSAUDIO_ERROR	An unexpected error occurred with the MSAudio codec.
0xC00D0BBB NS_E_INVALID_OUTPUT_FORMAT	The output media format is invalid.
0xC00D0BBC NS_E_NOT_CONFIGURED	The object must be fully configured before audio samples can be processed.
0xC00D0BBE NS_E_PROTECTED_CONTENT	You need a license to perform the requested operation on this media file.
0xC00D0BBE NS_E_LICENSE_REQUIRED	You need a license to perform the requested operation on this media file.
0xC00D0BBF NS_E_TAMPERED_CONTENT	This media file is corrupted or invalid. Contact the content provider for a new file.
0xC00D0BC0 NS_E_LICENSE_OUTOFDATE	The license for this media file has expired. Get a new license or contact the content provider for further assistance.
0xC00D0BC1 NS_E_LICENSE_INCORRECT_RIGHTS	You are not allowed to open this file. Contact the content provider for further assistance.
0xC00D0BC2 NS_E_AUDIO_CODEC_NOT_INSTALLED	The requested audio codec is not installed on this system.
0xC00D0BC3 NS_E_AUDIO_CODEC_ERROR	An unexpected error occurred with the audio codec.
0xC00D0BC4 NS_E_VIDEO_CODEC_NOT_INSTALLED	The requested video codec is not installed on this system.
0xC00D0BC5 NS_E_VIDEO_CODEC_ERROR	An unexpected error occurred with the video codec.
0xC00D0BC6 NS_E_INVALIDPROFILE	The Profile is invalid.
0xC00D0BC7 NS_E_INCOMPATIBLE_VERSION	A new version of the SDK is needed to play the requested content.
0xC00D0BCA	The requested URL is not

<b>Return value/code</b>	<b>Description</b>
NS_E_OFFLINE_MODE	available in offline mode.
0xC00D0BCB NS_E_NOT_CONNECTED	The requested URL cannot be accessed because there is no network connection.
0xC00D0BCC NS_E_TOO_MUCH_DATA	The encoding process was unable to keep up with the amount of supplied data.
0xC00D0BCD NS_E_UNSUPPORTED_PROPERTY	The given property is not supported.
0xC00D0BCE NS_E_8BIT_WAVE_UNSUPPORTED	Windows Media Player cannot copy the files to the CD because they are 8-bit. Convert the files to 16-bit, 44-kHz stereo files by using Sound Recorder or another audio-processing program, and then try again.
0xC00D0BCF NS_E_NO_MORE_SAMPLES	There are no more samples in the current range.
0xC00D0BD0 NS_E_INVALID_SAMPLING_RATE	The given sampling rate is invalid.
0xC00D0BD1 NS_E_MAX_PACKET_SIZE_TOO_SMALL	The given maximum packet size is too small to accommodate this profile.)
0xC00D0BD2 NS_E_LATE_PACKET	The packet arrived too late to be of use.
0xC00D0BD3 NS_E_DUPLICATE_PACKET	The packet is a duplicate of one received before.
0xC00D0BD4 NS_E_SDK_BUFFERTOOSMALL	Supplied buffer is too small.
0xC00D0BD5 NS_E_INVALID_NUM_PASSES	The wrong number of preprocessing passes was used for the stream's output type.
0xC00D0BD6 NS_E_ATTRIBUTE_READ_ONLY	An attempt was made to add, modify, or delete a read only attribute.
0xC00D0BD7 NS_E_ATTRIBUTE_NOT_ALLOWED	An attempt was made to add attribute that is not allowed for the given media type.
0xC00D0BD8 NS_E_INVALID_EDL	The EDL provided is invalid.
0xC00D0BD9 NS_E_DATA_UNIT_EXTENSION_TOO_LARGE	The Data Unit Extension data was too large to be used.
0xC00D0BDA NS_E_CODEC_DMO_ERROR	An unexpected error occurred with a DMO codec.

<b>Return value/code</b>	<b>Description</b>
0xC00D0BDC NS_E_FEATURE_DISABLED_BY_GROUP_POLICY	This feature has been disabled by group policy.
0xC00D0BDD NS_E_FEATURE_DISABLED_IN_SKU	This feature is disabled in this SKU.
0xC00D0FA0 NS_E_NO_CD	There is no CD in the CD drive. Insert a CD, and then try again.
0xC00D0FA1 NS_E_CANT_READ_DIGITAL	Windows Media Player could not use digital playback to play the CD. To switch to analog playback, on the Tools menu, click Options, and then click the Devices tab. Double-click the CD drive, and then in the Playback area, click Analog. For additional assistance, click Web Help.
0xC00D0FA2 NS_E_DEVICE_DISCONNECTED	Windows Media Player no longer detects a connected portable device. Reconnect your portable device, and then try synchronizing the file again.
0xC00D0FA3 NS_E_DEVICE_NOT_SUPPORT_FORMAT	Windows Media Player cannot play the file. The portable device does not support the specified file type.
0xC00D0FA4 NS_E_SLOW_READ_DIGITAL	Windows Media Player could not use digital playback to play the CD. The Player has automatically switched the CD drive to analog playback. To switch back to digital CD playback, use the Devices tab. For additional assistance, click Web Help.
0xC00D0FA5 NS_E_MIXER_INVALID_LINE	An invalid line error occurred in the mixer.
0xC00D0FA6 NS_E_MIXER_INVALID_CONTROL	An invalid control error occurred in the mixer.
0xC00D0FA7 NS_E_MIXER_INVALID_VALUE	An invalid value error occurred in the mixer.
0xC00D0FA8 NS_E_MIXER_UNKNOWN_MMRESULT	An unrecognized MMRESULT occurred in the mixer.
0xC00D0FA9 NS_E_USER_STOP	User has stopped the operation.
0xC00D0FAA NS_E_MP3_FORMAT_NOT_FOUND	Windows Media Player cannot rip the track because a compatible MP3 encoder is not installed on your computer.

Return value/code	Description
	Install a compatible MP3 encoder or choose a different format to rip to (such as Windows Media Audio).
0xC00D0FAB NS_E_CD_READ_ERROR_NO_CORRECTION	Windows Media Player cannot read the CD. The disc might be dirty or damaged. Turn on error correction, and then try again.
0xC00D0FAC NS_E_CD_READ_ERROR	Windows Media Player cannot read the CD. The disc might be dirty or damaged or the CD drive might be malfunctioning.
0xC00D0FAD NS_E_CD_SLOW_COPY	For best performance, do not play CD tracks while ripping them.
0xC00D0FAE NS_E_CD_COPYTO_CD	It is not possible to directly burn tracks from one CD to another CD. You must first rip the tracks from the CD to your computer, and then burn the files to a blank CD.
0xC00D0FAF NS_E_MIXER_NODRIVER	Could not open a sound mixer driver.
0xC00D0FB0 NS_E_REDBOOK_ENABLED_WHILE_COPYING	Windows Media Player cannot rip tracks from the CD correctly because the CD drive settings in Device Manager do not match the CD drive settings in the Player.
0xC00D0FB1 NS_E_CD_REFRESH	Windows Media Player is busy reading the CD.
0xC00D0FB2 NS_E_CD_DRIVER_PROBLEM	Windows Media Player could not use digital playback to play the CD. The Player has automatically switched the CD drive to analog playback. To switch back to digital CD playback, use the Devices tab. For additional assistance, click Web Help.
0xC00D0FB3 NS_E_WONT_DO_DIGITAL	Windows Media Player could not use digital playback to play the CD. The Player has automatically switched the CD drive to analog playback. To switch back to digital CD playback, use the Devices tab. For additional assistance, click Web Help.
0xC00D0FB4 NS_E_WMPXML_NOERROR	A call was made to GetParseError on the XML parser but there was no error to

Return value/code	Description
	retrieve.
0xC00D0FB5 NS_E_WMPXML_ENDOFDATA	The XML Parser ran out of data while parsing.
0xC00D0FB6 NS_E_WMPXML_PARSEERROR	A generic parse error occurred in the XML parser but no information is available.
0xC00D0FB7 NS_E_WMPXML_ATTRIBUTENOTFOUND	A call get GetNamedAttribute or GetNamedAttributeIndex on the XML parser resulted in the index not being found.
0xC00D0FB8 NS_E_WMPXML_PINOTFOUND	A call was made go GetNamedPI on the XML parser, but the requested Processing Instruction was not found.
0xC00D0FB9 NS_E_WMPXML_EMPTYDOC	Persist was called on the XML parser, but the parser has no data to persist.
0xC00D0FBA NS_E_WMP_PATH_ALREADY_IN_LIBRARY	This file path is already in the library.
0xC00D0FBE NS_E_WMP_FILESCANALREADYSTARTED	Windows Media Player is already searching for files to add to your library. Wait for the current process to finish before attempting to search again.
0xC00D0FBF NS_E_WMP_HME_INVALIDOBJECTID	Windows Media Player is unable to find the media you are looking for.
0xC00D0FC0 NS_E_WMP_MF_CODE_EXPIRED	A component of Windows Media Player is out-of-date. If you are running a pre-release version of Windows, try upgrading to a more recent version.
0xC00D0FC1 NS_E_WMP_HME_NOTSEARCHABLEFORITEMS	This container does not support search on items.
0xC00D0FC7 NS_E_WMP_ADDTOLIBRARY_FAILED	Windows Media Player encountered a problem while adding one or more files to the library. For additional assistance, click Web Help.
0xC00D0FC8 NS_E_WMP_WINDOWSAPIFAILURE	A Windows API call failed but no error information was available.
0xC00D0FC9 NS_E_WMP_RECORDING_NOT_ALLOWED	This file does not have burn rights. If you obtained this file from an online store, go to the online store to get burn rights.
0xC00D0FCA NS_E_DEVICE_NOT_READY	Windows Media Player no longer detects a connected portable device. Reconnect your portable

Return value/code	Description
	device, and then try to sync the file again.
0xC00D0FCB NS_E_DAMAGED_FILE	Windows Media Player cannot play the file because it is corrupted.
0xC00D0FCC NS_E_MPDB_GENERIC	Windows Media Player encountered an error while attempting to access information in the library. Try restarting the Player.
0xC00D0FCD NS_E_FILE_FAILED_CHECKS	The file cannot be added to the library because it is smaller than the "Skip files smaller than" setting. To add the file, change the setting on the Library tab. For additional assistance, click Web Help.
0xC00D0FCE NS_E_MEDIA_LIBRARY_FAILED	Windows Media Player cannot create the library. You must be logged on as an administrator or a member of the Administrators group to install the Player. For more information, contact your system administrator.
0xC00D0FCF NS_E_SHARING_VIOLATION	The file is already in use. Close other programs that might be using the file, or stop playing the file, and then try again.
0xC00D0FD0 NS_E_NO_ERROR_STRING_FOUND	Windows Media Player has encountered an unknown error.
0xC00D0FD1 NS_E_WMPOCX_NO_REMOTE_CORE	The Windows Media Player ActiveX control cannot connect to remote media services, but will continue with local media services.
0xC00D0FD2 NS_E_WMPOCX_NO_ACTIVE_CORE	The requested method or property is not available because the Windows Media Player ActiveX control has not been properly activated.
0xC00D0FD3 NS_E_WMPOCX_NOT_RUNNING_REMOTELY	The Windows Media Player ActiveX control is not running in remote mode.
0xC00D0FD4 NS_E_WMPOCX_NO_REMOTE_WINDOW	An error occurred while trying to get the remote Windows Media Player window.
0xC00D0FD5 NS_E_WMPOCX_ERRORMANAGERNOTAVAILABLE	Windows Media Player has encountered an unknown error.
0xC00D0FD6	Windows Media Player was not

<b>Return value/code</b>	<b>Description</b>
NS_E_PLUGIN_NOTSHUTDOWN	closed properly. A damaged or incompatible plug-in might have caused the problem to occur. As a precaution, all optional plug-ins have been disabled.
0xC00D0FD7 NS_E_WMP_CANNOT_FIND_FOLDER	Windows Media Player cannot find the specified path. Verify that the path is typed correctly. If it is, the path does not exist in the specified location, or the computer where the path is located is not available.
0xC00D0FD8 NS_E_WMP_STREAMING_RECORDING_NOT_ALLOWED	Windows Media Player cannot save a file that is being streamed.
0xC00D0FD9 NS_E_WMP_PLUGINDLL_NOTFOUND	Windows Media Player cannot find the selected plug-in. The Player will try to remove it from the menu. To use this plug-in, install it again.
0xC00D0FDA NS_E_NEED_TO_ASK_USER	Action requires input from the user.
0xC00D0FDB NS_E_WMPOCX_PLAYER_NOT_DOCKED	The Windows Media Player ActiveX control must be in a docked state for this action to be performed.
0xC00D0FDC NS_E_WMP_EXTERNAL_NOTREADY	The Windows Media Player external object is not ready.
0xC00D0FDD NS_E_WMP_MLS_STALE_DATA	Windows Media Player cannot perform the requested action. Your computer's time and date might not be set correctly.
0xC00D0FDE NS_E_WMP_UI_SUBCONTROLSNOTSUPPORTED	The control (%s) does not support creation of sub-controls, yet (%d) sub-controls have been specified.
0xC00D0FDF NS_E_WMP_UI_VERSIONMISMATCH	Version mismatch: (%.1f required, %.1f found).
0xC00D0FE0 NS_E_WMP_UI_NOTATHEMEFILE	The layout manager was given valid XML that wasn't a theme file.
0xC00D0FE1 NS_E_WMP_UI_SUBELEMENTNOTFOUND	The %s subelement could not be found on the %s object.
0xC00D0FE2 NS_E_WMP_UI_VERSIONPARSE	An error occurred parsing the version tag. Valid version tags are of the form: <?wmp version='1.0'?>.
0xC00D0FE3	The view specified in for the 'currentViewID' property (%s)

<b>Return value/code</b>	<b>Description</b>
NS_E_WMP_UI_VIEWIDNOTFOUND	was not found in this theme file.
0xC00D0FE4 NS_E_WMP_UI_PASSTHROUGH	This error used internally for hit testing.
0xC00D0FE5 NS_E_WMP_UI_OBJECTNOTFOUND	Attributes were specified for the %s object, but the object was not available to send them to.
0xC00D0FE6 NS_E_WMP_UI_SECONDHANDLER	The %s event already has a handler, the second handler was ignored.
0xC00D0FE7 NS_E_WMP_UI_NOSKININZIP	No .wms file found in skin archive.
0xC00D0FEA NS_E_WMP_URLDOWNLOADFAILED	Windows Media Player encountered a problem while downloading the file. For additional assistance, click Web Help.
0xC00D0FEB NS_E_WMPOCX_UNABLE_TO_LOAD_SKIN	The Windows Media Player ActiveX control cannot load the requested uiMode and cannot roll back to the existing uiMode.
0xC00D0FEC NS_E_WMP_INVALID_SKIN	Windows Media Player encountered a problem with the skin file. The skin file might not be valid.
0xC00D0FED NS_E_WMP_SENDEMAILFAILED	Windows Media Player cannot send the link because your email program is not responding. Verify that your email program is configured properly, and then try again. For more information about email, see Windows Help.
0xC00D0FEE NS_E_WMP_LOCKEDINSKINMODE	Windows Media Player cannot switch to full mode because your computer administrator has locked this skin.
0xC00D0FEF NS_E_WMP_FAILED_TO_SAVE_FILE	Windows Media Player encountered a problem while saving the file. For additional assistance, click Web Help.
0xC00D0FF0 NS_E_WMP_SAVEAS_READONLY	Windows Media Player cannot overwrite a read-only file. Try using a different file name.
0xC00D0FF1 NS_E_WMP_FAILED_TO_SAVE_PLAYLIST	Windows Media Player encountered a problem while creating or saving the playlist. For additional assistance, click Web Help.
0xC00D0FF2	Windows Media Player cannot

Return value/code	Description
NS_E_WMP_FAILED_TO_OPEN_WMD	open the Windows Media Download file. The file might be damaged.
0xC00D0FF3 NS_E_WMP_CANT_PLAY_PROTECTED	The file cannot be added to the library because it is a protected DVR-MS file. This content cannot be played back by Windows Media Player.
0xC00D0FF4 NS_E_SHARING_STATE_OUT_OF_SYNC	Media sharing has been turned off because a required Windows setting or component has changed. For additional assistance, click Web Help.
0xC00D0FFA NS_E_WMPOCX_REMOTE_PLAYER_ALREADY_RUNNING	Exclusive Services launch failed because the Windows Media Player is already running.
0xC00D1004 NS_E_WMP_RBC_JPGMAPPINGIMAGE	JPG Images are not recommended for use as a mappingImage.
0xC00D1005 NS_E_WMP_JPGTRANSPARENCY	JPG Images are not recommended when using a transparencyColor.
0xC00D1009 NS_E_WMP_INVALID_MAX_VAL	The Max property cannot be less than Min property.
0xC00D100A NS_E_WMP_INVALID_MIN_VAL	The Min property cannot be greater than Max property.
0xC00D100E NS_E_WMP_CS_JPGPOSITIONIMAGE	JPG Images are not recommended for use as a positionImage.
0xC00D100F NS_E_WMP_CS_NOTEVENLYDIVISIBLE	The (%s) image's size is not evenly divisible by the positionImage's size.
0xC00D1018 NS_E_WMPZIP_NOTAZIPFILE	The ZIP reader opened a file and its signature did not match that of the ZIP files.
0xC00D1019 NS_E_WMPZIP_CORRUPT	The ZIP reader has detected that the file is corrupted.
0xC00D101A NS_E_WMPZIP_FILENOTFOUND	GetFileStream, SaveToFile, or SaveTemp file was called on the ZIP reader with a file name that was not found in the ZIP file.
0xC00D1022 NS_E_WMP_IMAGE_FILETYPE_UNSUPPORTED	Image type not supported.
0xC00D1023 NS_E_WMP_IMAGE_INVALID_FORMAT	Image file <del>may</del> might be corrupt.
0xC00D1024	Unexpected end of file. GIF file

Return value/code	Description
NS_E_WMP_GIF_UNEXPECTED_ENDOFFILE	<del>may</del> might be corrupt.
0xC00D1025 NS_E_WMP_GIF_INVALID_FORMAT	Invalid GIF file.
0xC00D1026 NS_E_WMP_GIF_BAD_VERSION_NUMBER	Invalid GIF version. Only 87a or 89a supported.
0xC00D1027 NS_E_WMP_GIF_NO_IMAGE_IN_FILE	No images found in GIF file.
0xC00D1028 NS_E_WMP_PNG_INVALIDFORMAT	Invalid PNG image file format.
0xC00D1029 NS_E_WMP_PNG_UNSUPPORTED_BITDEPTH	PNG bitdepth not supported.
0xC00D102A NS_E_WMP_PNG_UNSUPPORTED_COMPRESSION	Compression format defined in PNG file not supported,
0xC00D102B NS_E_WMP_PNG_UNSUPPORTED_FILTER	Filter method defined in PNG file not supported.
0xC00D102C NS_E_WMP_PNG_UNSUPPORTED_INTERLACE	Interlace method defined in PNG file not supported.
0xC00D102D NS_E_WMP_PNG_UNSUPPORTED_BAD_CRC	Bad CRC in PNG file.
0xC00D102E NS_E_WMP_BMP_INVALID_BITMASK	Invalid bitmask in BMP file.
0xC00D102F NS_E_WMP_BMP_TOPDOWN_DIB_UNSUPPORTED	Topdown DIB not supported.
0xC00D1030 NS_E_WMP_BMP_BITMAP_NOT_CREATED	Bitmap could not be created.
0xC00D1031 NS_E_WMP_BMP_COMPRESSION_UNSUPPORTED	Compression format defined in BMP not supported.
0xC00D1032 NS_E_WMP_BMP_INVALID_FORMAT	Invalid Bitmap format.
0xC00D1033 NS_E_WMP_JPG_JERR_ARITHCODING_NOTIMPL	JPEG Arithmetic coding not supported.
0xC00D1034 NS_E_WMP_JPG_INVALID_FORMAT	Invalid JPEG format.
0xC00D1035 NS_E_WMP_JPG_BAD_DCTSIZE	Invalid JPEG format.
0xC00D1036 NS_E_WMP_JPG_BAD_VERSION_NUMBER	Internal version error. Unexpected JPEG library version.
0xC00D1037	Internal JPEG Library error.

<b>Return value/code</b>	<b>Description</b>
NS_E_WMP_JPG_BAD_PRECISION	Unsupported JPEG data precision.
0xC00D1038 NS_E_WMP_JPG_CCIR601_NOTIMPL	JPEG CCIR601 not supported.
0xC00D1039 NS_E_WMP_JPG_NO_IMAGE_IN_FILE	No image found in JPEG file.
0xC00D103A NS_E_WMP_JPG_READ_ERROR	Could not read JPEG file.
0xC00D103B NS_E_WMP_JPG_FRACT_SAMPLE_NOTIMPL	JPEG Fractional sampling not supported.
0xC00D103C NS_E_WMP_JPG_IMAGE_TOO_BIG	JPEG image too large. Maximum image size supported is 65500 X 65500.
0xC00D103D NS_E_WMP_JPG_UNEXPECTED_ENDOFFILE	Unexpected end of file reached in JPEG file.
0xC00D103E NS_E_WMP_JPG_SOF_UNSUPPORTED	Unsupported JPEG SOF marker found.
0xC00D103F NS_E_WMP_JPG_UNKNOWN_MARKER	Unknown JPEG marker found.
0xC00D1044 NS_E_WMP_FAILED_TO_OPEN_IMAGE	Windows Media Player cannot display the picture file. The player either does not support the picture type or the picture is corrupted.
0xC00D1049 NS_E_WMP_DAI_SONGTOOSHORT	Windows Media Player cannot compute a Digital Audio Id for the song. It is too short.
0xC00D104A NS_E_WMG_RATEUNAVAILABLE	Windows Media Player cannot play the file at the requested speed.
0xC00D104B NS_E_WMG_PLUGINUNAVAILABLE	The rendering or digital signal processing plug-in cannot be instantiated.
0xC00D104C NS_E_WMG_CANNOTQUEUE	The file cannot be queued for seamless playback.
0xC00D104D NS_E_WMG_PREROLLICENSEACQUISITIONNOTALLOWED	Windows Media Player cannot download media usage rights for a file in the playlist.
0xC00D104E NS_E_WMG_UNEXPECTEDPREROLLSTATUS	Windows Media Player encountered an error while trying to queue a file.
0xC00D1051 NS_E_WMG_INVALID_COPP_CERTIFICATE	Windows Media Player cannot play the protected file. The Player cannot verify that the connection to your video card is

Return value/code	Description
	secure. Try installing an updated device driver for your video card.
0xC00D1052 NS_E_WMG_COPP_SECURITY_INVALID	Windows Media Player cannot play the protected file. The Player detected that the connection to your hardware might not be secure.
0xC00D1053 NS_E_WMG_COPP_UNSUPPORTED	Windows Media Player output link protection is unsupported on this system.
0xC00D1054 NS_E_WMG_INVALIDSTATE	Operation attempted in an invalid graph state.
0xC00D1055 NS_E_WMG_SINKALREADYEXISTS	A renderer cannot be inserted in a stream while one already exists.
0xC00D1056 NS_E_WMG_NOSDKINTERFACE	The Windows Media SDK interface needed to complete the operation does not exist at this time.
0xC00D1057 NS_E_WMG_NOTALLOUTPUTSRENDERED	Windows Media Player cannot play a portion of the file because it requires a codec that either could not be downloaded or that is not supported by the Player.
0xC00D1058 NS_E_WMG_FILETRANSFERNOTALLOWED	File transfer streams are not allowed in the standalone Player.
0xC00D1059 NS_E_WMR_UNSUPPORTEDSTREAM	Windows Media Player cannot play the file. The Player does not support the format you are trying to play.
0xC00D105A NS_E_WMR_PINNOTFOUND	An operation was attempted on a pin that does not exist in the DirectShow filter graph.
0xC00D105B NS_E_WMR_WAITINGONFORMATSWITCH	Specified operation cannot be completed while waiting for a media format change from the SDK.
0xC00D105C NS_E_WMR_NOSOURCEFILTER	Specified operation cannot be completed because the source filter does not exist.
0xC00D105D NS_E_WMR_PINTYPENOMATCH	The specified type does not match this pin.
0xC00D105E NS_E_WMR_NOCALLBACKAVAILABLE	The WMR Source Filter does not have a callback available.
0xC00D1062	The specified property has not

<b>Return value/code</b>	<b>Description</b>
NS_E_WMR_SAMPLEPROPERTYNOTSET	been set on this sample.
0xC00D1063 NS_E_WMR_CANNOT_RENDER_BINARY_STREAM	A plug-in is required to correctly play the file. To determine if the plug-in is available to download, click Web Help.
0xC00D1064 NS_E_WMG_LICENSE_TAMPERED	Windows Media Player cannot play the file because your media usage rights are corrupted. If you previously backed up your media usage rights, try restoring them.
0xC00D1065 NS_E_WMR_WILLNOT_RENDER_BINARY_STREAM	Windows Media Player cannot play protected files that contain binary streams.
0xC00D1068 NS_E_WMX_UNRECOGNIZED_PLAYLIST_FORMAT	Windows Media Player cannot play the playlist because it is not valid.
0xC00D1069 NS_E_ASX_INVALIDFORMAT	Windows Media Player cannot play the playlist because it is not valid.
0xC00D106A NS_E_ASX_INVALIDVERSION	A later version of Windows Media Player might be required to play this playlist.
0xC00D106B NS_E_ASX_INVALID_REPEAT_BLOCK	The format of a REPEAT loop within the current playlist file is not valid.
0xC00D106C NS_E_ASX_NOTHING_TO_WRITE	Windows Media Player cannot save the playlist because it does not contain any items.
0xC00D106D NS_E_URLLIST_INVALIDFORMAT	Windows Media Player cannot play the playlist because it is not valid.
0xC00D106E NS_E_WMX_ATTRIBUTE_DOES_NOT_EXIST	The specified attribute does not exist.
0xC00D106F NS_E_WMX_ATTRIBUTE_ALREADY_EXISTS	The specified attribute already exists.
0xC00D1070 NS_E_WMX_ATTRIBUTE_UNRETRIEVABLE	Cannot retrieve the specified attribute.
0xC00D1071 NS_E_WMX_ITEM_DOES_NOT_EXIST	The specified item does not exist in the current playlist.
0xC00D1072 NS_E_WMX_ITEM_TYPE_ILLEGAL	Items of the specified type cannot be created within the current playlist.
0xC00D1073 NS_E_WMX_ITEM_UNSETTABLE	The specified item cannot be set in the current playlist.

<b>Return value/code</b>	<b>Description</b>
0xC00D1074 NS_E_WMX_PLAYLIST_EMPTY	Windows Media Player cannot perform the requested action because the playlist does not contain any items.
0xC00D1075 NS_E_MLS_SMARTPLAYLIST_FILTER_NOT_REGISTERED	The specified auto playlist contains a filter type that is either not valid or is not installed on this computer.
0xC00D1076 NS_E_WMX_INVALID_FORMAT_OVER_NESTING	Windows Media Player cannot play the file because the associated playlist contains too many nested playlists.
0xC00D107C NS_E_WMPCORE_NOSOURCEURLSTRING	Windows Media Player cannot find the file. Verify that the path is typed correctly. If it is, the file might not exist in the specified location, or the computer where the file is stored might not be available.
0xC00D107D NS_E_WMPCORE_COCREATEFAILEDFORGITOBJECT	Failed to create the Global Interface Table.
0xC00D107E NS_E_WMPCORE_FAILEDTOGETMARSHALLEVENTHANDLERINTERFACE	Failed to get the marshaled graph event handler interface.
0xC00D107F NS_E_WMPCORE_BUFFERTOOSMALL	Buffer is too small for copying media type.
0xC00D1080 NS_E_WMPCORE_UNAVAILABLE	The current state of the Player does not allow this operation.
0xC00D1081 NS_E_WMPCORE_INVALIDPLAYLISTMODE	The playlist manager does not understand the current play mode (for example, shuffle or normal).
0xC00D1086 NS_E_WMPCORE_ITEMNOTINPLAYLIST	Windows Media Player cannot play the file because it is not in the current playlist.
0xC00D1087 NS_E_WMPCORE_PLAYLISTEMPTY	There are no items in the playlist. Add items to the playlist, and then try again.
0xC00D1088 NS_E_WMPCORE_NOBROWSER	The web page cannot be displayed because no web browser is installed on your computer.
0xC00D1089 NS_E_WMPCORE_UNRECOGNIZED_MEDIA_URL	Windows Media Player cannot find the specified file. Verify the path is typed correctly. If it is, the file does not exist in the specified location, or the computer where the file is stored is not available.

<b>Return value/code</b>	<b>Description</b>
0xC00D108A NS_E_WMPCORE_GRAPH_NOT_IN_LIST	Graph with the specified URL was not found in the prerolled graph list.
0xC00D108B NS_E_WMPCORE_PLAYLIST_EMPTY_OR_SINGLE_MEDIA	Windows Media Player cannot perform the requested operation because there is only one item in the playlist.
0xC00D108C NS_E_WMPCORE_ERRORSINKNOTREGISTERED	An error sink was never registered for the calling object.
0xC00D108D NS_E_WMPCORE_ERRORMANAGERNOTAVAILABLE	The error manager is not available to respond to errors.
0xC00D108E NS_E_WMPCORE_WEBHELPPAILED	The Web Help URL cannot be opened.
0xC00D108F NS_E_WMPCORE_MEDIA_ERROR_RESUME_FAILED	Could not resume playing next item in playlist.
0xC00D1090 NS_E_WMPCORE_NO_REF_IN_ENTRY	Windows Media Player cannot play the file because the associated playlist does not contain any items or the playlist is not valid.
0xC00D1091 NS_E_WMPCORE_WMX_LIST_ATTRIBUTE_NAME_EMPTY	An empty string for playlist attribute name was found.
0xC00D1092 NS_E_WMPCORE_WMX_LIST_ATTRIBUTE_NAME_ILLEGAL	A playlist attribute name that is not valid was found.
0xC00D1093 NS_E_WMPCORE_WMX_LIST_ATTRIBUTE_VALUE_EMPTY	An empty string for a playlist attribute value was found.
0xC00D1094 NS_E_WMPCORE_WMX_LIST_ATTRIBUTE_VALUE_ILLEGAL	An illegal value for a playlist attribute was found.
0xC00D1095 NS_E_WMPCORE_WMX_LIST_ITEM_ATTRIBUTE_NAME_EMPTY	An empty string for a playlist item attribute name was found.
0xC00D1096 NS_E_WMPCORE_WMX_LIST_ITEM_ATTRIBUTE_NAME_ILLEGAL	An illegal value for a playlist item attribute name was found.
0xC00D1097 NS_E_WMPCORE_WMX_LIST_ITEM_ATTRIBUTE_VALUE_EMPTY	An illegal value for a playlist item attribute was found.
0xC00D1098 NS_E_WMPCORE_LIST_ENTRY_NO_REF	The playlist does not contain any items.
0xC00D1099 NS_E_WMPCORE_MISNAMED_FILE	Windows Media Player cannot play the file. The file is either corrupted or the Player does not support the format you are trying to play.
0xC00D109A NS_E_WMPCORE_CODEC_NOT_TRUSTED	The codec downloaded for this file does not appear to be

Return value/code	Description
	properly signed, so it cannot be installed.
0xC00D109B NS_E_WMPCORE_CODEEC_NOT_FOUND	Windows Media Player cannot play the file. One or more codecs required to play the file could not be found.
0xC00D109C NS_E_WMPCORE_CODEEC_DOWNLOAD_NOT_ALLOWED	Windows Media Player cannot play the file because a required codec is not installed on your computer. To try downloading the codec, turn on the "Download codecs automatically" option.
0xC00D109D NS_E_WMPCORE_ERROR_DOWNLOADING_PLAYLIST	Windows Media Player encountered a problem while downloading the playlist. For additional assistance, click Web Help.
0xC00D109E NS_E_WMPCORE_FAILED_TO_BUILD_PLAYLIST	Failed to build the playlist.
0xC00D109F NS_E_WMPCORE_PLAYLIST_ITEM_ALTERNATE_NONE	Playlist has no alternates to switch into.
0xC00D10A0 NS_E_WMPCORE_PLAYLIST_ITEM_ALTERNATE_EXHAUSTED	No more playlist alternates available to switch to.
0xC00D10A1 NS_E_WMPCORE_PLAYLIST_ITEM_ALTERNATE_NAME_NOT_FOUND	Could not find the name of the alternate playlist to switch into.
0xC00D10A2 NS_E_WMPCORE_PLAYLIST_ITEM_ALTERNATE_MORPH_FAILED	Failed to switch to an alternate for this media.
0xC00D10A3 NS_E_WMPCORE_PLAYLIST_ITEM_ALTERNATE_INIT_FAILED	Failed to initialize an alternate for the media.
0xC00D10A4 NS_E_WMPCORE_MEDIA_ALTERNATE_REF_EMPTY	No URL specified for the roll over Refs in the playlist file.
0xC00D10A5 NS_E_WMPCORE_PLAYLIST_NO_EVENT_NAME	Encountered a playlist with no name.
0xC00D10A6 NS_E_WMPCORE_PLAYLIST_EVENT_ATTRIBUTE_ABSENT	A required attribute in the event block of the playlist was not found.
0xC00D10A7 NS_E_WMPCORE_PLAYLIST_EVENT_EMPTY	No items were found in the event block of the playlist.
0xC00D10A8 NS_E_WMPCORE_PLAYLIST_STACK_EMPTY	No playlist was found while returning from a nested playlist.
0xC00D10A9 NS_E_WMPCORE_CURRENT_MEDIA_NOT_ACTIVE	The media item is not active currently.

<b>Return value/code</b>	<b>Description</b>
0xC00D10AB NS_E_WMPCORE_USER_CANCEL	Windows Media Player cannot perform the requested action because you chose to cancel it.
0xC00D10AC NS_E_WMPCORE_PLAYLIST_REPEAT_EMPTY	Windows Media Player encountered a problem with the playlist. The format of the playlist is not valid.
0xC00D10AD NS_E_WMPCORE_PLAYLIST_REPEAT_START_MEDIA_NONE	Media object corresponding to start of a playlist repeat block was not found.
0xC00D10AE NS_E_WMPCORE_PLAYLIST_REPEAT_END_MEDIA_NONE	Media object corresponding to the end of a playlist repeat block was not found.
0xC00D10AF NS_E_WMPCORE_INVALID_PLAYLIST_URL	The playlist URL supplied to the playlist manager is not valid.
0xC00D10B0 NS_E_WMPCORE_MISMATCHED_RUNTIME	Windows Media Player cannot play the file because it is corrupted.
0xC00D10B1 NS_E_WMPCORE_PLAYLIST_IMPORT_FAILED_NO_ITEMS	Windows Media Player cannot add the playlist to the library because the playlist does not contain any items.
0xC00D10B2 NS_E_WMPCORE_VIDEO_TRANSFORM_FILTER_INSERTION	An error has occurred that could prevent the changing of the video contrast on this media.
0xC00D10B3 NS_E_WMPCORE_MEDIA_UNAVAILABLE	Windows Media Player cannot play the file. If the file is located on the Internet, connect to the Internet. If the file is located on a removable storage card, insert the storage card.
0xC00D10B4 NS_E_WMPCORE_WMX_ENTRYREF_NO_REF	The playlist contains an ENTRYREF for which no href was parsed. Check the syntax of playlist file.
0xC00D10B5 NS_E_WMPCORE_NO_PLAYABLE_MEDIA_IN_PLAYLIST	Windows Media Player cannot play any items in the playlist. To find information about the problem, click the Now Playing tab, and then click the icon next to each file in the List pane.
0xC00D10B6 NS_E_WMPCORE_PLAYLIST_EMPTY_NESTED_PLAYLIST_SKIPPED_ITEMS	Windows Media Player cannot play some or all of the items in the playlist because the playlist is nested.
0xC00D10B7 NS_E_WMPCORE_BUSY	Windows Media Player cannot play the file at this time. Try again later.
0xC00D10B8	There is no child playlist

<b>Return value/code</b>	<b>Description</b>
NS_E_WMPCORE_MEDIA_CHILD_PLAYLIST_UNAVAILABLE	available for this media item at this time.
0xC00D10B9 NS_E_WMPCORE_MEDIA_NO_CHILD_PLAYLIST	There is no child playlist for this media item.
0xC00D10BA NS_E_WMPCORE_FILE_NOT_FOUND	Windows Media Player cannot find the file. The link from the item in the library to its associated digital media file might be broken. To fix the problem, try repairing the link or removing the item from the library.
0xC00D10BB NS_E_WMPCORE_TEMP_FILE_NOT_FOUND	The temporary file was not found.
0xC00D10BC NS_E_WMDM_REVOKED	Windows Media Player cannot sync the file because the device needs to be updated.
0xC00D10BD NS_E_DDRAW_GENERIC	Windows Media Player cannot play the video because there is a problem with your video card.
0xC00D10BE NS_E_DISPLAY_MODE_CHANGE_FAILED	Windows Media Player failed to change the screen mode for full-screen video playback.
0xC00D10BF NS_E_PLAYLIST_CONTAINS_ERRORS	Windows Media Player cannot play one or more files. For additional information, right-click an item that cannot be played, and then click Error Details.
0xC00D10C0 NS_E_CHANGING_PROXY_NAME	Cannot change the proxy name if the proxy setting is not set to custom.
0xC00D10C1 NS_E_CHANGING_PROXY_PORT	Cannot change the proxy port if the proxy setting is not set to custom.
0xC00D10C2 NS_E_CHANGING_PROXY_EXCEPTIONLIST	Cannot change the proxy exception list if the proxy setting is not set to custom.
0xC00D10C3 NS_E_CHANGING_PROXYBYPASS	Cannot change the proxy bypass flag if the proxy setting is not set to custom.
0xC00D10C4 NS_E_CHANGING_PROXY_PROTOCOL_NOT_FOUND	Cannot find the specified protocol.
0xC00D10C5 NS_E_GRAPH_NOAUDIOLANGUAGE	Cannot change the language settings. Either the graph has no audio or the audio only supports one language.
0xC00D10C6	The graph has no audio

<b>Return value/code</b>	<b>Description</b>
NS_E_GRAPH_NOAUDIOLANGUAGESELECTED	language selected.
0xC00D10C7 NS_E_CORECD_NOTAMEDIACD	This is not a media CD.
0xC00D10C8 NS_E_WMPCORE_MEDIA_URL_TOO_LONG	Windows Media Player cannot play the file because the URL is too long.
0xC00D10C9 NS_E_WMPFLASH_CANT_FIND_COM_SERVER	To play the selected item, you must install the Macromedia Flash Player. To download the Macromedia Flash Player, go to the Adobe website.
0xC00D10CA NS_E_WMPFLASH_INCOMPATIBLEVERSION	To play the selected item, you must install a later version of the Macromedia Flash Player. To download the Macromedia Flash Player, go to the Adobe website.
0xC00D10CB NS_E_WMPOCXGRAPH_IE_DISALLOWS_ACTIVEX_CONTROLS	Windows Media Player cannot play the file because your Internet security settings prohibit the use of ActiveX controls.
0xC00D10CC NS_E_NEED_CORE_REFERENCE	The use of this method requires an existing reference to the Player object.
0xC00D10CD NS_E_MEDIACD_READ_ERROR	Windows Media Player cannot play the CD. The disc might be dirty or damaged.
0xC00D10CE NS_E_IE_DISALLOWS_ACTIVEX_CONTROLS	Windows Media Player cannot play the file because your Internet security settings prohibit the use of ActiveX controls.
0xC00D10CF NS_E_FLASH_PLAYBACK_NOT_ALLOWED	Flash playback has been turned off in Windows Media Player.
0xC00D10D0 NS_E_UNABLE_TO_CREATE_RIP_LOCATION	Windows Media Player cannot rip the CD because a valid rip location cannot be created.
0xC00D10D1 NS_E_WMPCORE_SOME_CODECS_MISSING	Windows Media Player cannot play the file because a required codec is not installed on your computer.
0xC00D10D2 NS_E_WMP_RIP_FAILED	Windows Media Player cannot rip one or more tracks from the CD.
0xC00D10D3 NS_E_WMP_FAILED_TO_RIP_TRACK	Windows Media Player encountered a problem while ripping the track from the CD. For additional assistance, click

Return value/code	Description
	Web Help.
0xC00D10D4 NS_E_WMP_ERASE_FAILED	Windows Media Player encountered a problem while erasing the disc. For additional assistance, click Web Help.
0xC00D10D5 NS_E_WMP_FORMAT_FAILED	Windows Media Player encountered a problem while formatting the device. For additional assistance, click Web Help.
0xC00D10D6 NS_E_WMP_CANNOT_BURN_NON_LOCAL_FILE	This file cannot be burned to a CD because it is not located on your computer.
0xC00D10D7 NS_E_WMP_FILE_TYPE_CANNOT_BURN_TO_AUDIO_CD	It is not possible to burn this file type to an audio CD. Windows Media Player can burn the following file types to an audio CD: WMA, MP3, or WAV.
0xC00D10D8 NS_E_WMP_FILE_DOES_NOT_FIT_ON_CD	This file is too large to fit on a disc.
0xC00D10D9 NS_E_WMP_FILE_NO_DURATION	It is not possible to determine if this file can fit on a disc because Windows Media Player cannot detect the length of the file. Playing the file before burning <b>may</b> enable the Player to detect the file length.
0xC00D10DA NS_E_PDA_FAILED_TO_BURN	Windows Media Player encountered a problem while burning the file to the disc. For additional assistance, click Web Help.
0xC00D10DC NS_E_FAILED_DOWNLOAD_ABORT_BURN	Windows Media Player cannot burn the audio CD because some items in the list that you chose to buy could not be downloaded from the online store.
0xC00D10DD NS_E_WMPCORE_DEVICE_DRIVERS_MISSING	Windows Media Player cannot play the file. Try using Windows Update or Device Manager to update the device drivers for your audio and video cards. For information about using Windows Update or Device Manager, see Windows Help.
0xC00D1126 NS_E_WMPIM_USEROFFLINE	Windows Media Player has detected that you are not connected to the Internet. Connect to the Internet, and then try again.

<b>Return value/code</b>	<b>Description</b>
0xC00D1127 NS_E_WMPIM_USERCANCELED	The attempt to connect to the Internet was canceled.
0xC00D1128 NS_E_WMPIM_DIALUPFAILED	The attempt to connect to the Internet failed.
0xC00D1129 NS_E_WINSOCK_ERROR_STRING	Windows Media Player has encountered an unknown network error.
0xC00D1130 NS_E_WMPBR_NOLISTENER	No window is currently listening to Backup and Restore events.
0xC00D1131 NS_E_WMPBR_BACKUPCANCEL	Your media usage rights were not backed up because the backup was canceled.
0xC00D1132 NS_E_WMPBR_RESTORECANCEL	Your media usage rights were not restored because the restoration was canceled.
0xC00D1133 NS_E_WMPBR_ERRORWITHURL	An error occurred while backing up or restoring your media usage rights. A required web page cannot be displayed.
0xC00D1134 NS_E_WMPBR_NAMECOLLISION	Your media usage rights were not backed up because the backup was canceled.
0xC00D1137 NS_E_WMPBR_DRIVE_INVALID	Windows Media Player cannot restore your media usage rights from the specified location. Choose another location, and then try again.
0xC00D1138 NS_E_WMPBR_BACKUPRESTOREFAILED	Windows Media Player cannot backup or restore your media usage rights.
0xC00D1158 NS_E_WMP_CONVERT_FILE_FAILED	Windows Media Player cannot add the file to the library.
0xC00D1159 NS_E_WMP_CONVERT_NO_RIGHTS_ERRORURL	Windows Media Player cannot add the file to the library because the content provider prohibits it. For assistance, contact the company that provided the file.
0xC00D115A NS_E_WMP_CONVERT_NO_RIGHTS_NOERRORURL	Windows Media Player cannot add the file to the library because the content provider prohibits it. For assistance, contact the company that provided the file.
0xC00D115B NS_E_WMP_CONVERT_FILE_CORRUPT	Windows Media Player cannot add the file to the library. The file might not be valid.

Return value/code	Description
0xC00D115C NS_E_WMP_CONVERT_PLUGIN_UNAVAILABLE_ERRORURL	Windows Media Player cannot add the file to the library. The plug-in required to add the file is not installed properly. For assistance, click Web Help to display the website of the company that provided the file.
0xC00D115D NS_E_WMP_CONVERT_PLUGIN_UNAVAILABLE_NOERRORURL	Windows Media Player cannot add the file to the library. The plug-in required to add the file is not installed properly. For assistance, contact the company that provided the file.
0xC00D115E NS_E_WMP_CONVERT_PLUGIN_UNKNOWN_FILE_OWNER	Windows Media Player cannot add the file to the library. The plug-in required to add the file is not installed properly. For assistance, contact the company that provided the file.
0xC00D1160 NS_E_DVD_DISC_COPY_PROTECT_OUTPUT_NS	Windows Media Player cannot play this DVD. Try installing an updated driver for your video card or obtaining a newer video card.
0xC00D1161 NS_E_DVD_DISC_COPY_PROTECT_OUTPUT_FAILED	This DVD's resolution exceeds the maximum allowed by your component video outputs. Try reducing your screen resolution to 640 x 480, or turn off analog component outputs and use a VGA connection to your monitor.
0xC00D1162 NS_E_DVD_NO_SUBPICTURE_STREAM	Windows Media Player cannot display subtitles or highlights in DVD menus. Reinstall the DVD decoder or contact the DVD drive manufacturer to obtain an updated decoder.
0xC00D1163 NS_E_DVD_COPY_PROTECT	Windows Media Player cannot play this DVD because there is a problem with digital copy protection between your DVD drive, decoder, and video card. Try installing an updated driver for your video card.
0xC00D1164 NS_E_DVD_AUTHORIZING_PROBLEM	Windows Media Player cannot play the DVD. The disc was created in a manner that the Player does not support.
0xC00D1165 NS_E_DVD_INVALID_DISC_REGION	Windows Media Player cannot play the DVD because the disc prohibits playback in your region of the world. You must obtain a disc that is intended for

<b>Return value/code</b>	<b>Description</b>
	your geographic region.
0xC00D1166 NS_E_DVD_COMPATIBLE_VIDEO_CARD	Windows Media Player cannot play the DVD because your video card does not support DVD playback.
0xC00D1167 NS_E_DVD_MACROVISION	Windows Media Player cannot play this DVD because it is not possible to turn on analog copy protection on the output display. Try installing an updated driver for your video card.
0xC00D1168 NS_E_DVD_SYSTEM_DECODER_REGION	Windows Media Player cannot play the DVD because the region assigned to your DVD drive does not match the region assigned to your DVD decoder.
0xC00D1169 NS_E_DVD_DISC_DECODER_REGION	Windows Media Player cannot play the DVD because the disc prohibits playback in your region of the world. You must obtain a disc that is intended for your geographic region.
0xC00D116A NS_E_DVD_NO_VIDEO_STREAM	Windows Media Player cannot play DVD video. You might need to adjust your Windows display settings. Open display settings in Control Panel, and then try lowering your screen resolution and color quality settings.
0xC00D116B NS_E_DVD_NO_AUDIO_STREAM	Windows Media Player cannot play DVD audio. Verify that your sound card is set up correctly, and then try again.
0xC00D116C NS_E_DVD_GRAPH_BUILDING	Windows Media Player cannot play DVD video. Close any open files and quit any other programs, and then try again. If the problem persists, restart your computer.
0xC00D116D NS_E_DVD_NO_DECODER	Windows Media Player cannot play the DVD because a compatible DVD decoder is not installed on your computer.
0xC00D116E NS_E_DVD_PARENTAL	Windows Media Player cannot play the scene because it has a parental rating higher than the rating that you are authorized to view.
0xC00D116F NS_E_DVD_CANNOT_JUMP	Windows Media Player cannot skip to the requested location on the DVD.

Return value/code	Description
0xC00D1170 NS_E_DVD_DEVICE_CONTENTION	Windows Media Player cannot play the DVD because it is currently in use by another program. Quit the other program that is using the DVD, and then try again.
0xC00D1171 NS_E_DVD_NO_VIDEO_MEMORY	Windows Media Player cannot play DVD video. You might need to adjust your Windows display settings. Open display settings in Control Panel, and then try lowering your screen resolution and color quality settings.
0xC00D1172 NS_E_DVD_CANNOT_COPY_PROTECTED	Windows Media Player cannot rip the DVD because it is copy protected.
0xC00D1173 NS_E_DVD_REQUIRED_PROPERTY_NOT_SET	One of more of the required properties has not been set.
0xC00D1174 NS_E_DVD_INVALID_TITLE_CHAPTER	The specified title and/or chapter number does not exist on this DVD.
0xC00D1176 NS_E_NO_CD_BURNER	Windows Media Player cannot burn the files because the Player cannot find a burner. If the burner is connected properly, try using Windows Update to install the latest device driver.
0xC00D1177 NS_E_DEVICE_IS_NOT_READY	Windows Media Player does not detect storage media in the selected device. Insert storage media into the device, and then try again.
0xC00D1178 NS_E_PDA_UNSUPPORTED_FORMAT	Windows Media Player cannot sync this file. The Player might not support the file type.
0xC00D1179 NS_E_NO_PDA	Windows Media Player does not detect a portable device. Connect your portable device, and then try again.
0xC00D117A NS_E_PDA_UNSPECIFIED_ERROR	Windows Media Player encountered an error while communicating with the device. The storage card on the device might be full, the device might be turned off, or the device might not allow playlists or folders to be created on it.
0xC00D117B NS_E_MEMSTORAGE_BAD_DATA	Windows Media Player encountered an error while burning a CD.

<b>Return value/code</b>	<b>Description</b>
0xC00D117C NS_E_PDA_FAIL_SELECT_DEVICE	Windows Media Player encountered an error while communicating with a portable device or CD drive.
0xC00D117D NS_E_PDA_FAIL_READ_WAVE_FILE	Windows Media Player cannot open the WAV file.
0xC00D117E NS_E_IMAPI_LOSSOFSTREAMING	Windows Media Player failed to burn all the files to the CD. Select a slower recording speed, and then try again.
0xC00D117F NS_E_PDA_DEVICE_FULL	There is not enough storage space on the portable device to complete this operation. Delete some unneeded files on the portable device, and then try again.
0xC00D1180 NS_E_FAIL_LAUNCH_ROXIO_PLUGIN	Windows Media Player cannot burn the files. Verify that your burner is connected properly, and then try again. If the problem persists, reinstall the Player.
0xC00D1181 NS_E_PDA_DEVICE_FULL_IN_SESSION	Windows Media Player did not sync some files to the device because there is not enough storage space on the device.
0xC00D1182 NS_E_IMAPI_MEDIUM_INVALIDTYPE	The disc in the burner is not valid. Insert a blank disc into the burner, and then try again.
0xC00D1183 NS_E_PDA_MANUALDEVICE	Windows Media Player cannot perform the requested action because the device does not support sync.
0xC00D1184 NS_E_PDA_PARTNERSHIPNOTEXIST	To perform the requested action, you must first set up sync with the device.
0xC00D1185 NS_E_PDA_CANNOT_CREATE_ADDITIONAL_SYNC_RELATIONSHIP	You have already created sync partnerships with 16 devices. To create a new sync partnership, you must first end an existing partnership.
0xC00D1186 NS_E_PDA_NO_TRANSCODE_OF_DRM	Windows Media Player cannot sync the file because protected files cannot be converted to the required quality level or file format.
0xC00D1187 NS_E_PDA_TRANSCODECACHEFULL	The folder that stores converted files is full. Either empty the folder or increase its size, and then try again.

Return value/code	Description
0xC00D1188 NS_E_PDA_TOO_MANY_FILE_COLLISIONS	There are too many files with the same name in the folder on the device. Change the file name or sync to a different folder.
0xC00D1189 NS_E_PDA_CANNOT_TRANSCODE	Windows Media Player cannot convert the file to the format required by the device.
0xC00D118A NS_E_PDA_TOO_MANY_FILES_IN_DIRECTORY	You have reached the maximum number of files your device allows in a folder. If your device supports playback from subfolders, try creating subfolders on the device and storing some files in them.
0xC00D118B NS_E_PROCESSINGSHOWSYNCWIZARD	Windows Media Player is already trying to start the Device Setup Wizard.
0xC00D118C NS_E_PDA_TRANSCODE_NOT_PERMITTED	Windows Media Player cannot convert this file format. If an updated version of the codec used to compress this file is available, install it and then try to sync the file again.
0xC00D118D NS_E_PDA_INITIALIZINGDEVICES	Windows Media Player is busy setting up devices. Try again later.
0xC00D118E NS_E_PDA_OBSOLETE_SP	Your device is using an outdated driver that is no longer supported by Windows Media Player. For additional assistance, click Web Help.
0xC00D118F NS_E_PDA_TITLE_COLLISION	Windows Media Player cannot sync the file because a file with the same name already exists on the device. Change the file name or try to sync the file to a different folder.
0xC00D1190 NS_E_PDA_DEVICESUPPORTDISABLED	Automatic and manual sync have been turned off temporarily. To sync to a device, restart Windows Media Player.
0xC00D1191 NS_E_PDA_NO_LONGER_AVAILABLE	This device is not available. Connect the device to the computer, and then try again.
0xC00D1192 NS_E_PDA_ENCODER_NOT_RESPONDING	Windows Media Player cannot sync the file because an error occurred while converting the file to another quality level or format. If the problem persists, remove the file from the list of

Return value/code	Description
	files to sync.
0xC00D1193 NS_E_PDA_CANNOT_SYNC_FROM_LOCATION	Windows Media Player cannot sync the file to your device. The file might be stored in a location that is not supported. Copy the file from its current location to your hard disk, add it to your library, and then try to sync the file again.
0xC00D1194 NS_E_WMP_PROTOCOL_PROBLEM	Windows Media Player cannot open the specified URL. Verify that the Player is configured to use all available protocols, and then try again.
0xC00D1195 NS_E_WMP_NO_DISK_SPACE	Windows Media Player cannot perform the requested action because there is not enough storage space on your computer. Delete some unneeded files on your hard disk, and then try again.
0xC00D1196 NS_E_WMP_LOGON_FAILURE	The server denied access to the file. Verify that you are using the correct user name and password.
0xC00D1197 NS_E_WMP_CANNOT_FIND_FILE	Windows Media Player cannot find the file. If you are trying to play, burn, or sync an item that is in your library, the item might point to a file that has been moved, renamed, or deleted.
0xC00D1198 NS_E_WMP_SERVER_INACCESSIBLE	Windows Media Player cannot connect to the server. The server name might not be correct, the server might not be available, or your proxy settings might not be correct.
0xC00D1199 NS_E_WMP_UNSUPPORTED_FORMAT	Windows Media Player cannot play the file. The Player might not support the file type or might not support the codec that was used to compress the file.
0xC00D119A NS_E_WMP_DSHOW_UNSUPPORTED_FORMAT	Windows Media Player cannot play the file. The Player might not support the file type or a required codec might not be installed on your computer.
0xC00D119B NS_E_WMP_PLAYLIST_EXISTS	Windows Media Player cannot create the playlist because the name already exists. Type a different playlist name.

Return value/code	Description
0xC00D119C NS_E_WMP_NONMEDIA_FILES	Windows Media Player cannot delete the playlist because it contains items that are not digital media files. Any digital media files in the playlist were deleted.
0xC00D119D NS_E_WMP_INVALID_ASX	The playlist cannot be opened because it is stored in a shared folder on another computer. If possible, move the playlist to the playlists folder on your computer.
0xC00D119E NS_E_WMP_ALREADY_IN_USE	Windows Media Player is already in use. Stop playing any items, close all Player dialog boxes, and then try again.
0xC00D119F NS_E_WMP_IMAPI_FAILURE	Windows Media Player encountered an error while burning. Verify that the burner is connected properly and that the disc is clean and not damaged.
0xC00D11A0 NS_E_WMP_WMDM_FAILURE	Windows Media Player has encountered an unknown error with your portable device. Reconnect your portable device, and then try again.
0xC00D11A1 NS_E_WMP_CODEC_NEEDED_WITH_4CC	A codec is required to play this file. To determine if this codec is available to download from the web, click Web Help.
0xC00D11A2 NS_E_WMP_CODEC_NEEDED_WITH_FORMATTAG	An audio codec is needed to play this file. To determine if this codec is available to download from the web, click Web Help.
0xC00D11A3 NS_E_WMP_MSSAP_NOT_AVAILABLE	To play the file, you must install the latest Windows service pack. To install the service pack from the Windows Update website, click Web Help.
0xC00D11A4 NS_E_WMP_WMDM_INTERFACEDead	Windows Media Player no longer detects a portable device. Reconnect your portable device, and then try again.
0xC00D11A5 NS_E_WMP_WMDM_NOTCERTIFIED	Windows Media Player cannot sync the file because the portable device does not support protected files.
0xC00D11A6 NS_E_WMP_WMDM_LICENSE_NOTEXIST	This file does not have sync rights. If you obtained this file from an online store, go to the

Return value/code	Description
	online store to get sync rights.
0xC00D11A7 NS_E_WMP_WMDM_LICENSE_EXPIRED	Windows Media Player cannot sync the file because the sync rights have expired. Go to the content provider's online store to get new sync rights.
0xC00D11A8 NS_E_WMP_WMDM_BUSY	The portable device is already in use. Wait until the current task finishes or quit other programs that might be using the portable device, and then try again.
0xC00D11A9 NS_E_WMP_WMDM_NORIGHTS	Windows Media Player cannot sync the file because the content provider or device prohibits it. You might be able to resolve this problem by going to the content provider's online store to get sync rights.
0xC00D11AA NS_E_WMP_WMDM_INCORRECT_RIGHTS	The content provider has not granted you the right to sync this file. Go to the content provider's online store to get sync rights.
0xC00D11AB NS_E_WMP_IMAPI_GENERIC	Windows Media Player cannot burn the files to the CD. Verify that the disc is clean and not damaged. If necessary, select a slower recording speed or try a different brand of blank discs.
0xC00D11AD NS_E_WMP_IMAPI_DEVICE_NOTPRESENT	Windows Media Player cannot burn the files. Verify that the burner is connected properly, and then try again.
0xC00D11AE NS_E_WMP_IMAPI_DEVICE_BUSY	Windows Media Player cannot burn the files. Verify that the burner is connected properly and that the disc is clean and not damaged. If the burner is already in use, wait until the current task finishes or quit other programs that might be using the burner.
0xC00D11AF NS_E_WMP_IMAPI_LOSS_OF_STREAMING	Windows Media Player cannot burn the files to the CD.
0xC00D11B0 NS_E_WMP_SERVER_UNAVAILABLE	Windows Media Player cannot play the file. The server might not be available or there might be a problem with your network or firewall settings.
0xC00D11B1 NS_E_WMP_FILE_OPEN_FAILED	Windows Media Player encountered a problem while playing the file. For additional

Return value/code	Description
	assistance, click Web Help.
0xC00D11B2 NS_E_WMP_VERIFY_ONLINE	Windows Media Player must connect to the Internet to verify the file's media usage rights. Connect to the Internet, and then try again.
0xC00D11B3 NS_E_WMP_SERVER_NOT_RESPONDING	Windows Media Player cannot play the file because a network error occurred. The server might not be available. Verify that you are connected to the network and that your proxy settings are correct.
0xC00D11B4 NS_E_WMP_DRM_CORRUPT_BACKUP	Windows Media Player cannot restore your media usage rights because it could not find any backed up rights on your computer.
0xC00D11B5 NS_E_WMP_DRM_LICENSE_SERVER_UNAVAILABLE	Windows Media Player cannot download media usage rights because the server is not available (for example, the server might be busy or not online).
0xC00D11B6 NS_E_WMP_NETWORK_FIREWALL	Windows Media Player cannot play the file. A network firewall might be preventing the Player from opening the file by using the UDP transport protocol. If you typed a URL in the Open URL dialog box, try using a different transport protocol (for example, "http:").
0xC00D11B7 NS_E_WMP_NO_REMOVABLE_MEDIA	Insert the removable media, and then try again.
0xC00D11B8 NS_E_WMP_PROXY_CONNECT_TIMEOUT	Windows Media Player cannot play the file because the proxy server is not responding. The proxy server might be temporarily unavailable or your Player proxy settings might not be valid.
0xC00D11B9 NS_E_WMP_NEED_UPGRADE	To play the file, you might need to install a later version of Windows Media Player. On the Help menu, click Check for Updates, and then follow the instructions. For additional assistance, click Web Help.
0xC00D11BA NS_E_WMP_AUDIO_HW_PROBLEM	Windows Media Player cannot play the file because there is a problem with your sound device. There might not be a sound device installed on your

Return value/code	Description
	computer, it might be in use by another program, or it might not be functioning properly.
0xC00D11BB NS_E_WMP_INVALID_PROTOCOL	Windows Media Player cannot play the file because the specified protocol is not supported. If you typed a URL in the Open URL dialog box, try using a different transport protocol (for example, "http:" or "rtsp:").
0xC00D11BC NS_E_WMP_INVALID_LIBRARY_ADD	Windows Media Player cannot add the file to the library because the file format is not supported.
0xC00D11BD NS_E_WMP_MMS_NOT_SUPPORTED	Windows Media Player cannot play the file because the specified protocol is not supported. If you typed a URL in the Open URL dialog box, try using a different transport protocol (for example, "mms:").
0xC00D11BE NS_E_WMP_NO_PROTOCOLS_SELECTED	Windows Media Player cannot play the file because there are no streaming protocols selected. Select one or more protocols, and then try again.
0xC00D11BF NS_E_WMP_GOFULLSCREEN_FAILED	Windows Media Player cannot switch to Full Screen. You might need to adjust your Windows display settings. Open display settings in Control Panel, and then try setting Hardware acceleration to Full.
0xC00D11C0 NS_E_WMP_NETWORK_ERROR	Windows Media Player cannot play the file because a network error occurred. The server might not be available (for example, the server is busy or not online) or you might not be connected to the network.
0xC00D11C1 NS_E_WMP_CONNECT_TIMEOUT	Windows Media Player cannot play the file because the server is not responding. Verify that you are connected to the network, and then try again later.
0xC00D11C2 NS_E_WMP_MULTICAST_DISABLED	Windows Media Player cannot play the file because the multicast protocol is not enabled. On the Tools menu, click Options, click the Network tab, and then select the Multicast check box. For additional assistance, click Web

Return value/code	Description
	Help.
0xC00D11C3 NS_E_WMP_SERVER_DNS_TIMEOUT	Windows Media Player cannot play the file because a network problem occurred. Verify that you are connected to the network, and then try again later.
0xC00D11C4 NS_E_WMP_PROXY_NOT_FOUND	Windows Media Player cannot play the file because the network proxy server cannot be found. Verify that your proxy settings are correct, and then try again.
0xC00D11C5 NS_E_WMP_TAMPERED_CONTENT	Windows Media Player cannot play the file because it is corrupted.
0xC00D11C6 NS_E_WMP_OUTOFMEMORY	Your computer is running low on memory. Quit other programs, and then try again.
0xC00D11C7 NS_E_WMP_AUDIO_CODEC_NOT_INSTALLED	Windows Media Player cannot play, burn, rip, or sync the file because a required audio codec is not installed on your computer.
0xC00D11C8 NS_E_WMP_VIDEO_CODEC_NOT_INSTALLED	Windows Media Player cannot play the file because the required video codec is not installed on your computer.
0xC00D11C9 NS_E_WMP_IMAPI_DEVICE_INVALIDTYPE	Windows Media Player cannot burn the files. If the burner is busy, wait for the current task to finish. If necessary, verify that the burner is connected properly and that you have installed the latest device driver.
0xC00D11CA NS_E_WMP_DRM_DRIVER_AUTH_FAILURE	Windows Media Player cannot play the protected file because there is a problem with your sound device. Try installing a new device driver or use a different sound device.
0xC00D11CB NS_E_WMP_NETWORK_RESOURCE_FAILURE	Windows Media Player encountered a network error. Restart the Player.
0xC00D11CC NS_E_WMP_UPGRADE_APPLICATION	Windows Media Player is not installed properly. Reinstall the Player.
0xC00D11CD NS_E_WMP_UNKNOWN_ERROR	Windows Media Player encountered an unknown error. For additional assistance, click Web Help.

Return value/code	Description
0xC00D11CE NS_E_WMP_INVALID_KEY	Windows Media Player cannot play the file because the required codec is not valid.
0xC00D11CF NS_E_WMP_CD_ANOTHER_USER	The CD drive is in use by another user. Wait for the task to complete, and then try again.
0xC00D11D0 NS_E_WMP_DRM_NEEDS_AUTHORIZATION	Windows Media Player cannot play, sync, or burn the protected file because a problem occurred with the Windows Media Digital Rights Management (DRM) system. You might need to connect to the Internet to update your DRM components. For additional assistance, click Web Help.
0xC00D11D1 NS_E_WMP_BAD_DRIVER	Windows Media Player cannot play the file because there might be a problem with your sound or video device. Try installing an updated device driver.
0xC00D11D2 NS_E_WMP_ACCESS_DENIED	Windows Media Player cannot access the file. The file might be in use, you might not have access to the computer where the file is stored, or your proxy settings might not be correct.
0xC00D11D3 NS_E_WMP_LICENSE_RESTRICTS	The content provider prohibits this action. Go to the content provider's online store to get new media usage rights.
0xC00D11D4 NS_E_WMP_INVALID_REQUEST	Windows Media Player cannot perform the requested action at this time.
0xC00D11D5 NS_E_WMP_CD_STASH_NO_SPACE	Windows Media Player cannot burn the files because there is not enough free disk space to store the temporary files. Delete some unneeded files on your hard disk, and then try again.
0xC00D11D6 NS_E_WMP_DRM_NEW_HARDWARE	Your media usage rights have become corrupted or are no longer valid. This might happen if you have replaced hardware components in your computer.
0xC00D11D7 NS_E_WMP_DRM_INVALID_SIG	The required Windows Media Digital Rights Management (DRM) component cannot be validated. You might be able to resolve the problem by reinstalling the Player.

Return value/code	Description
0xC00D11D8 NS_E_WMP_DRM_CANNOT_RESTORE	You have exceeded your restore limit for the day. Try restoring your media usage rights tomorrow.
0xC00D11D9 NS_E_WMP_BURN_DISC_OVERFLOW	Some files might not fit on the CD. The required space cannot be calculated accurately because some files might be missing duration information. To ensure the calculation is accurate, play the files that are missing duration information.
0xC00D11DA NS_E_WMP_DRM_GENERIC_LICENSE_FAILURE	Windows Media Player cannot verify the file's media usage rights. If you obtained this file from an online store, go to the online store to get the necessary rights.
0xC00D11DB NS_E_WMP_DRM_NO_SECURE_CLOCK	It is not possible to sync because this device's internal clock is not set correctly. To set the clock, select the option to set the device clock on the Privacy tab of the Options dialog box, connect to the Internet, and then sync the device again. For additional assistance, click Web Help.
0xC00D11DC NS_E_WMP_DRM_NO_RIGHTS	Windows Media Player cannot play, burn, rip, or sync the protected file because you do not have the appropriate rights.
0xC00D11DD NS_E_WMP_DRM_INDIV_FAILED	Windows Media Player encountered an error during upgrade.
0xC00D11DE NS_E_WMP_SERVER_NONEWCONNECTIONS	Windows Media Player cannot connect to the server because it is not accepting any new connections. This could be because it has reached its maximum connection limit. Please try again later.
0xC00D11DF NS_E_WMP_MULTIPLE_ERROR_IN_PLAYLIST	A number of queued files cannot be played. To find information about the problem, click the Now Playing tab, and then click the icon next to each file in the List pane.
0xC00D11E0 NS_E_WMP_IMAPI2_ERASE_FAIL	Windows Media Player encountered an error while erasing the rewritable CD or DVD. Verify that the CD or DVD burner is connected properly and that the disc is clean and

Return value/code	Description
	not damaged.
0xC00D11E1 NS_E_WMP_IMAPI2_ERASE_DEVICE_BUSY	Windows Media Player cannot erase the rewritable CD or DVD. Verify that the CD or DVD burner is connected properly and that the disc is clean and not damaged. If the burner is already in use, wait until the current task finishes or quit other programs that might be using the burner.
0xC00D11E2 NS_E_WMP_DRM_COMPONENT_FAILURE	A Windows Media Digital Rights Management (DRM) component encountered a problem. If you are trying to use a file that you obtained from an online store, try going to the online store and getting the appropriate usage rights.
0xC00D11E3 NS_E_WMP_DRM_NO_DEVICE_CERT	It is not possible to obtain device's certificate. Please contact the device manufacturer for a firmware update or for other steps to resolve this problem.
0xC00D11E4 NS_E_WMP_SERVER_SECURITY_ERROR	Windows Media Player encountered an error when connecting to the server. The security information from the server could not be validated.
0xC00D11E5 NS_E_WMP_AUDIO_DEVICE_LOST	An audio device was disconnected or reconfigured. Verify that the audio device is connected, and then try to play the item again.
0xC00D11E6 NS_E_WMP_IMAPI_MEDIA_INCOMPATIBLE	Windows Media Player could not complete burning because the disc is not compatible with your drive. Try inserting a different kind of recordable media or use a disc that supports a write speed that is compatible with your drive.
0xC00D11EE NS_E_SYNCWIZ_DEVICE_FULL	Windows Media Player cannot save the sync settings because your device is full. Delete some unneeded files on your device and then try again.
0xC00D11EF NS_E_SYNCWIZ_CANNOT_CHANGE_SETTINGS	It is not possible to change sync settings at this time. Try again later.
0xC00D11F0 NS_E_TRANSCODE_DELETECACHEERROR	Windows Media Player cannot delete these files currently. If the Player is synchronizing, wait

Return value/code	Description
	until it is complete and then try again.
0xC00D11F8 NS_E_CD_NO_BUFFERS_READ	Windows Media Player could not use digital mode to read the CD. The Player has automatically switched the CD drive to analog mode. To switch back to digital mode, use the Devices tab. For additional assistance, click Web Help.
0xC00D11F9 NS_E_CD_EMPTY_TRACK_QUEUE	No CD track was specified for playback.
0xC00D11FA NS_E_CD_NO_READER	The CD filter was not able to create the CD reader.
0xC00D11FB NS_E_CD_ISRC_INVALID	Invalid ISRC code.
0xC00D11FC NS_E_CD_MEDIA_CATALOG_NUMBER_INVALID	Invalid Media Catalog Number.
0xC00D11FD NS_E_SLOW_READ_DIGITAL_WITH_ERRORCORRECTION	Windows Media Player cannot play audio CDs correctly because the CD drive is slow and error correction is turned on. To increase performance, turn off playback error correction for this drive.
0xC00D11FE NS_E_CD_SPEEDDETECT_NOT_ENOUGH_READS	Windows Media Player cannot estimate the CD drive's playback speed because the CD track is too short.
0xC00D11FF NS_E_CD_QUEUEING_DISABLED	Cannot queue the CD track because queuing is not enabled.
0xC00D1202 NS_E_WMP_DRM_ACQUIRING_LICENSE	Windows Media Player cannot download additional media usage rights until the current download is complete.
0xC00D1203 NS_E_WMP_DRM_LICENSE_EXPIRED	The media usage rights for this file have expired or are no longer valid. If you obtained the file from an online store, sign in to the store, and then try again.
0xC00D1204 NS_E_WMP_DRM_LICENSE_NOTACQUIRED	Windows Media Player cannot download the media usage rights for the file. If you obtained the file from an online store, sign in to the store, and then try again.
0xC00D1205 NS_E_WMP_DRM_LICENSE_NOTENABLED	The media usage rights for this file are not yet valid. To see when they will become valid, right-click the file in the library,

Return value/code	Description
	click Properties, and then click the Media Usage Rights tab.
0xC00D1206 NS_E_WMP_DRM_LICENSE_UNUSABLE	The media usage rights for this file are not valid. If you obtained this file from an online store, contact the store for assistance.
0xC00D1207 NS_E_WMP_DRM_LICENSE_CONTENT_REVOKED	The content provider has revoked the media usage rights for this file. If you obtained this file from an online store, ask the store if a new version of the file is available.
0xC00D1208 NS_E_WMP_DRM_LICENSE_NOSAP	The media usage rights for this file require a feature that is not supported in your current version of Windows Media Player or your current version of Windows. Try installing the latest version of the Player. If you obtained this file from an online store, contact the store for further assistance.
0xC00D1209 NS_E_WMP_DRM_UNABLE_TO_ACQUIRE_LICENSE	Windows Media Player cannot download media usage rights at this time. Try again later.
0xC00D120A NS_E_WMP_LICENSE_REQUIRED	Windows Media Player cannot play, burn, or sync the file because the media usage rights are missing. If you obtained the file from an online store, sign in to the store, and then try again.
0xC00D120B NS_E_WMP_PROTECTED_CONTENT	Windows Media Player cannot play, burn, or sync the file because the media usage rights are missing. If you obtained the file from an online store, sign in to the store, and then try again.
0xC00D122A NS_E_WMP_POLICY_VALUE_NOT_CONFIGURED	Windows Media Player cannot read a policy. This can occur when the policy does not exist in the registry or when the registry cannot be read.
0xC00D1234 NS_E_PDA_CANNOT_SYNC_FROM_INTERNET	Windows Media Player cannot sync content streamed directly from the Internet. If possible, download the file to your computer, and then try to sync the file.
0xC00D1235 NS_E_PDA_CANNOT_SYNC_INVALID_PLAYLIST	This playlist is not valid or is corrupted. Create a new playlist using Windows Media Player, then sync the new playlist instead.

Return value/code	Description
0xC00D1236 NS_E_PDA_FAILED_TO_SYNCHRONIZE_FILE	Windows Media Player encountered a problem while synchronizing the file to the device. For additional assistance, click Web Help.
0xC00D1237 NS_E_PDA_SYNC_FAILED	Windows Media Player encountered an error while synchronizing to the device.
0xC00D1238 NS_E_PDA_DELETE_FAILED	Windows Media Player cannot delete a file from the device.
0xC00D1239 NS_E_PDA_FAILED_TO_RETRIEVE_FILE	Windows Media Player cannot copy a file from the device to your library.
0xC00D123A NS_E_PDA_DEVICE_NOT_RESPONDING	Windows Media Player cannot communicate with the device because the device is not responding. Try reconnecting the device, resetting the device, or contacting the device manufacturer for updated firmware.
0xC00D123B NS_E_PDA_FAILED_TO_TRANSCODE_PHOTO	Windows Media Player cannot sync the picture to the device because a problem occurred while converting the file to another quality level or format. The original file might be damaged or corrupted.
0xC00D123C NS_E_PDA_FAILED_TO_ENCRYPT_TRANSCODED_FILE	Windows Media Player cannot convert the file. The file might have been encrypted by the Encrypted File System (EFS). Try decrypting the file first and then synchronizing it. For information about how to decrypt a file, see Windows Help and Support.
0xC00D123D NS_E_PDA_CANNOT_TRANSCODE_TO_AUDIO	Your device requires that this file be converted in order to play on the device. However, the device either does not support playing audio, or Windows Media Player cannot convert the file to an audio format that is supported by the device.
0xC00D123E NS_E_PDA_CANNOT_TRANSCODE_TO_VIDEO	Your device requires that this file be converted in order to play on the device. However, the device either does not support playing video, or Windows Media Player cannot convert the file to a video format that is supported by the

Return value/code	Description
	device.
0xC00D123F NS_E_PDA_CANNOT_TRANSCODE_TO_IMAGE	Your device requires that this file be converted in order to play on the device. However, the device either does not support displaying pictures, or Windows Media Player cannot convert the file to a picture format that is supported by the device.
0xC00D1240 NS_E_PDA_RETRIEVED_FILE_FILENAME_TOO_LONG	Windows Media Player cannot sync the file to your computer because the file name is too long. Try renaming the file on the device.
0xC00D1241 NS_E_PDA_CEWMDM_DRM_ERROR	Windows Media Player cannot sync the file because the device is not responding. This typically occurs when there is a problem with the device firmware. For additional assistance, click Web Help.
0xC00D1242 NS_E_INCOMPLETE_PLAYLIST	Incomplete playlist.
0xC00D1243 NS_E_PDA_SYNC_RUNNING	It is not possible to perform the requested action because sync is in progress. You can either stop sync or wait for it to complete, and then try again.
0xC00D1244 NS_E_PDA_SYNC_LOGIN_ERROR	Windows Media Player cannot sync the subscription content because you are not signed in to the online store that provided it. Sign in to the online store, and then try again.
0xC00D1245 NS_E_PDA_TRANSCODE_CODEC_NOT_FOUND	Windows Media Player cannot convert the file to the format required by the device. One or more codecs required to convert the file could not be found.
0xC00D1246 NS_E_CANNOT_SYNC_DRM_TO_NON_JANUS_DEVICE	It is not possible to sync subscription files to this device.
0xC00D1247 NS_E_CANNOT_SYNC_PREVIOUS_SYNC_RUNNING	Your device is operating slowly or is not responding. Until the device responds, it is not possible to sync again. To return the device to normal operation, try disconnecting it from the computer or resetting it.
0xC00D125C NS_E_WMP_HWND_NOTFOUND	The Windows Media Player download manager cannot

Return value/code	Description
	function properly because the Player main window cannot be found. Try restarting the Player.
0xC00D125D NS_E_BKGDOWNLOAD_WRONG_NO_FILES	Windows Media Player encountered a download that has the wrong number of files. This might occur if another program is trying to create jobs with the same signature as the Player.
0xC00D125E NS_E_BKGDOWNLOAD_COMPLETECANCELLEDJOB	Windows Media Player tried to complete a download that was already canceled. The file will not be available.
0xC00D125F NS_E_BKGDOWNLOAD_CANCELCOMPLETEDJOB	Windows Media Player tried to cancel a download that was already completed. The file will not be removed.
0xC00D1260 NS_E_BKGDOWNLOAD_NOJOBPOINTER	Windows Media Player is trying to access a download that is not valid.
0xC00D1261 NS_E_BKGDOWNLOAD_INVALIDJOBSIGNATURE	This download was not created by Windows Media Player.
0xC00D1262 NS_E_BKGDOWNLOAD_FAILED_TO_CREATE_TEMPFILE	The Windows Media Player download manager cannot create a temporary file name. This might occur if the path is not valid or if the disk is full.
0xC00D1263 NS_E_BKGDOWNLOAD_PLUGIN_FAILEDINITIALIZE	The Windows Media Player download manager plug-in cannot start. This might occur if the system is out of resources.
0xC00D1264 NS_E_BKGDOWNLOAD_PLUGIN_FAILEDTOMOVEFILE	The Windows Media Player download manager cannot move the file.
0xC00D1265 NS_E_BKGDOWNLOAD_CALLFUNCFAILED	The Windows Media Player download manager cannot perform a task because the system has no resources to allocate.
0xC00D1266 NS_E_BKGDOWNLOAD_CALLFUNCTIMEOUT	The Windows Media Player download manager cannot perform a task because the task took too long to run.
0xC00D1267 NS_E_BKGDOWNLOAD_CALLFUNCENDED	The Windows Media Player download manager cannot perform a task because the Player is terminating the service. The task will be recovered when the Player restarts.

Return value/code	Description
0xC00D1268 NS_E_BKGDOWNLOAD_WMDUNPACKFAILED	The Windows Media Player download manager cannot expand a WMD file. The file will be deleted and the operation will not be completed successfully.
0xC00D1269 NS_E_BKGDOWNLOAD_FAILEDINITIALIZE	The Windows Media Player download manager cannot start. This might occur if the system is out of resources.
0xC00D126A NS_E_INTERFACE_NOT_REGISTERED_IN_GIT	Windows Media Player cannot access a required functionality. This might occur if the wrong system files or Player DLLs are loaded.
0xC00D126B NS_E_BKGDOWNLOAD_INVALID_FILE_NAME	Windows Media Player cannot get the file name of the requested download. The requested download will be canceled.
0xC00D128E NS_E_IMAGE_DOWNLOAD_FAILED	Windows Media Player encountered an error while downloading an image.
0xC00D12C0 NS_E_WMP_UDRM_NOUSERLIST	Windows Media Player cannot update your media usage rights because the Player cannot verify the list of activated users of this computer.
0xC00D12C1 NS_E_WMP_DRM_NOT_ACQUIRING	Windows Media Player is trying to acquire media usage rights for a file that is no longer being used. Rights acquisition will stop.
0xC00D12F2 NS_E_WMP_BSTR_TOO_LONG	The parameter is not valid.
0xC00D12FC NS_E_WMP_AUTOPLAY_INVALID_STATE	The state is not valid for this request.
0xC00D1306 NS_E_WMP_COMPONENT_REVOKED	Windows Media Player cannot play this file until you complete the software component upgrade. After the component has been upgraded, try to play the file again.
0xC00D1324 NS_E_CURL_NOTSAFE	The URL is not safe for the operation specified.
0xC00D1325 NS_E_CURL_INVALIDCHAR	The URL contains one or more characters that are not valid.
0xC00D1326 NS_E_CURL_INVALIDHOSTNAME	The URL contains a host name that is not valid.

<b>Return value/code</b>	<b>Description</b>
0xC00D1327 NS_E_CURL_INVALIDPATH	The URL contains a path that is not valid.
0xC00D1328 NS_E_CURL_INVALIDSCHEME	The URL contains a scheme that is not valid.
0xC00D1329 NS_E_CURL_INVALIDURL	The URL is not valid.
0xC00D132B NS_E_CURL_CANTWALK	Windows Media Player cannot play the file. If you clicked a link on a web page, the link might not be valid.
0xC00D132C NS_E_CURL_INVALIDPORT	The URL port is not valid.
0xC00D132D NS_E_CURLHELPER_NOTADIRECTORY	The URL is not a directory.
0xC00D132E NS_E_CURLHELPER_NOTAFILE	The URL is not a file.
0xC00D132F NS_E_CURL_CANTDECODE	The URL contains characters that cannot be decoded. The URL might be truncated or incomplete.
0xC00D1330 NS_E_CURLHELPER_NOTRELATIVE	The specified URL is not a relative URL.
0xC00D1331 NS_E_CURL_INVALIDBUFFERSIZE	The buffer is smaller than the size specified.
0xC00D1356 NS_E_SUBSCRIPTIONSERVICE_PLAYBACK_DISALLOWED	The content provider has not granted you the right to play this file. Go to the content provider's online store to get play rights.
0xC00D1357 NS_E_CANNOT_BUY_OR_DOWNLOAD_FROM_MULTIPLE_SERVICES	Windows Media Player cannot purchase or download content from multiple online stores.
0xC00D1358 NS_E_CANNOT_BUY_OR_DOWNLOAD_CONTENT	The file cannot be purchased or downloaded. The file might not be available from the online store.
0xC00D135A NS_E_NOT_CONTENT_PARTNER_TRACK	The provider of this file cannot be identified.
0xC00D135B NS_E_TRACK_DOWNLOAD_REQUIRES_ALBUM_PURCHASE	The file is only available for download when you buy the entire album.
0xC00D135C NS_E_TRACK_DOWNLOAD_REQUIRES_PURCHASE	You must buy the file before you can download it.

Return value/code	Description
0xC00D135D NS_E_TRACK_PURCHASE_MAXIMUM_EXCEEDED	You have exceeded the maximum number of files that can be purchased in a single transaction.
0xC00D135F NS_E_SUBSCRIPTIONSERVICE_LOGIN_FAILED	Windows Media Player cannot sign in to the online store. Verify that you are using the correct user name and password. If the problem persists, the store <b>may</b> be temporarily unavailable.
0xC00D1360 NS_E_SUBSCRIPTIONSERVICE_DOWNLOAD_TIMEOUT	Windows Media Player cannot download this item because the server is not responding. The server might be temporarily unavailable or <b>you may have lost your</b> Internet connection <b>might be lost</b> .
0xC00D1362 NS_E_CONTENT_PARTNER_STILL_INITIALIZING	Content Partner still initializing.
0xC00D1363 NS_E_OPEN_CONTAINING_FOLDER_FAILED	The folder could not be opened. The folder <b>may</b> have been moved or deleted.
0xC00D136A NS_E_ADVANCEDEDIT_TOO_MANY_PICTURES	Windows Media Player could not add all of the images to the file because the images exceeded the 7 megabyte (MB) limit.
0xC00D1388 NS_E_REDIRECT	The client redirected to another server.
0xC00D1389 NS_E_STALE_PRESENTATION	The streaming media description is no longer current.
0xC00D138A NS_E_NAMESPACE_WRONG_PERSIST	It is not possible to create a persistent namespace node under a transient parent node.
0xC00D138B NS_E_NAMESPACE_WRONG_TYPE	It is not possible to store a value in a namespace node that has a different value type.
0xC00D138C NS_E_NAMESPACE_NODE_CONFLICT	It is not possible to remove the root namespace node.
0xC00D138D NS_E_NAMESPACE_NODE_NOT_FOUND	The specified namespace node could not be found.
0xC00D138E NS_E_NAMESPACE_BUFFER_TOO_SMALL	The buffer supplied to hold namespace node string is too small.
0xC00D138F NS_E_NAMESPACE_TOO_MANY_CALLBACKS	The callback list on a namespace node is at the maximum size.

<b>Return value/code</b>	<b>Description</b>
0xC00D1390 NS_E_NAMESPACE_DUPLICATE_CALLBACK	It is not possible to register an already-registered callback on a namespace node.
0xC00D1391 NS_E_NAMESPACE_CALLBACK_NOT_FOUND	Cannot find the callback in the namespace when attempting to remove the callback.
0xC00D1392 NS_E_NAMESPACE_NAME_TOO_LONG	The namespace node name exceeds the allowed maximum length.
0xC00D1393 NS_E_NAMESPACE_DUPLICATE_NAME	Cannot create a namespace node that already exists.
0xC00D1394 NS_E_NAMESPACE_EMPTY_NAME	The namespace node name cannot be a null string.
0xC00D1395 NS_E_NAMESPACE_INDEX_TOO_LARGE	Finding a child namespace node by index failed because the index exceeded the number of children.
0xC00D1396 NS_E_NAMESPACE_BAD_NAME	The namespace node name is invalid.
0xC00D1397 NS_E_NAMESPACE_WRONG_SECURITY	It is not possible to store a value in a namespace node that has a different security type.
0xC00D13EC NS_E_CACHE_ARCHIVE_CONFLICT	The archive request conflicts with other requests in progress.
0xC00D13ED NS_E_CACHE_ORIGIN_SERVER_NOT_FOUND	The specified origin server cannot be found.
0xC00D13EE NS_E_CACHE_ORIGIN_SERVER_TIMEOUT	The specified origin server is not responding.
0xC00D13EF NS_E_CACHE_NOT_BROADCAST	The internal code for HTTP status code 412 Precondition Failed due to not broadcast type.
0xC00D13F0 NS_E_CACHE_CANNOT_BE_CACHED	The internal code for HTTP status code 403 Forbidden due to not cacheable.
0xC00D13F1 NS_E_CACHE_NOT_MODIFIED	The internal code for HTTP status code 304 Not Modified.
0xC00D1450 NS_E_CANNOT_REMOVE_PUBLISHING_POINT	It is not possible to remove a cache or proxy publishing point.
0xC00D1451 NS_E_CANNOT_REMOVE_PLUGIN	It is not possible to remove the last instance of a type of plugin.
0xC00D1452 NS_E_WRONG_PUBLISHING_POINT_TYPE	Cache and proxy publishing points do not support this

<b>Return value/code</b>	<b>Description</b>
	property or method.
0xC00D1453 NS_E_UNSUPPORTED_LOAD_TYPE	The plug-in does not support the specified load type.
0xC00D1454 NS_E_INVALID_PLUGIN_LOAD_TYPE_CONFIGURATION	The plug-in does not support any load types. The plug-in must support at least one load type.
0xC00D1455 NS_E_INVALID_PUBLISHING_POINT_NAME	The publishing point name is invalid.
0xC00D1456 NS_E_TOO_MANY_MULTICAST_SINKS	Only one multicast data writer plug-in can be enabled for a publishing point.
0xC00D1457 NS_E_PUBLISHING_POINT_INVALID_REQUEST_WHILE_STARTED	The requested operation cannot be completed while the publishing point is started.
0xC00D1458 NS_E_MULTICAST_PLUGIN_NOT_ENABLED	A multicast data writer plug-in must be enabled in order for this operation to be completed.
0xC00D1459 NS_E_INVALID_OPERATING_SYSTEM_VERSION	This feature requires Windows Server 2003, Enterprise Edition.
0xC00D145A NS_E_PUBLISHING_POINT_REMOVED	The requested operation cannot be completed because the specified publishing point has been removed.
0xC00D145B NS_E_INVALID_PUSH_PUBLISHING_POINT_START_REQUEST	Push publishing points are started when the encoder starts pushing the stream. This publishing point cannot be started by the server administrator.
0xC00D145C NS_E_UNSUPPORTED_LANGUAGE	The specified language is not supported.
0xC00D145D NS_E_WRONG_OS_VERSION	Windows Media Services will only run on Windows Server 2003, Standard Edition and Windows Server 2003, Enterprise Edition.
0xC00D145E NS_E_PUBLISHING_POINT_STOPPED	The operation cannot be completed because the publishing point has been stopped.
0xC00D14B4 NS_E_PLAYLIST_ENTRY_ALREADY_PLAYING	The playlist entry is already playing.
0xC00D14B5 NS_E_EMPTY_PLAYLIST	The playlist or directory you are requesting does not contain content.

<b>Return value/code</b>	<b>Description</b>
0xC00D14B6 NS_E_PLAYLIST_PARSE_FAILURE	The server was unable to parse the requested playlist file.
0xC00D14B7 NS_E_PLAYLIST_UNSUPPORTED_ENTRY	The requested operation is not supported for this type of playlist entry.
0xC00D14B8 NS_E_PLAYLIST_ENTRY_NOT_IN_PLAYLIST	Cannot jump to a playlist entry that is not inserted in the playlist.
0xC00D14B9 NS_E_PLAYLIST_ENTRY_SEEK	Cannot seek to the desired playlist entry.
0xC00D14BA NS_E_PLAYLIST_RECURSIVE_PLAYLISTS	Cannot play recursive playlist.
0xC00D14BB NS_E_PLAYLIST_TOO_MANY_NESTED_PLAYLISTS	The number of nested playlists exceeded the limit the server can handle.
0xC00D14BC NS_E_PLAYLIST_SHUTDOWN	Cannot execute the requested operation because the playlist has been shut down by the Media Server.
0xC00D14BD NS_E_PLAYLIST_END_RECEDING	The playlist has ended while receding.
0xC00D1518 NS_E_DATAPATH_NO_SINK	The data path does not have an associated data writer plug-in.
0xC00D151A NS_E_INVALID_PUSH_TEMPLATE	The specified push template is invalid.
0xC00D151B NS_E_INVALID_PUSH_PUBLISHING_POINT	The specified push publishing point is invalid.
0xC00D151C NS_E_CRITICAL_ERROR	The requested operation cannot be performed because the server or publishing point is in a critical error state.
0xC00D151D NS_E_NO_NEW_CONNECTIONS	The content cannot be played because the server is not currently accepting connections. Try connecting at a later time.
0xC00D151E NS_E_WSX_INVALID_VERSION	The version of this playlist is not supported by the server.
0xC00D151F NS_E_HEADER_MISMATCH	The command does not apply to the current media header user by a server component.
0xC00D1520 NS_E_PUSH_DUPLICATE_PUBLISHING_POINT_NAME	The specified publishing point name is already in use.
0xC00D157C	There is no script engine available for this file.

<b>Return value/code</b>	<b>Description</b>
NS_E_NO_SCRIPT_ENGINE	
0xC00D157D NS_E_PLUGIN_ERROR_REPORTED	The plug-in has reported an error. See the Troubleshooting tab or the NT Application Event Log for details.
0xC00D157E NS_E_SOURCE_PLUGIN_NOT_FOUND	No enabled data source plug-in is available to access the requested content.
0xC00D157F NS_E_PLAYLIST_PLUGIN_NOT_FOUND	No enabled playlist parser plug-in is available to access the requested content.
0xC00D1580 NS_E_DATA_SOURCE_ENUMERATION_NOT_SUPPORTED	The data source plug-in does not support enumeration.
0xC00D1581 NS_E_MEDIA_PARSER_INVALID_FORMAT	The server cannot stream the selected file because it is either damaged or corrupt. Select a different file.
0xC00D1582 NS_E_SCRIPT_DEBUGGER_NOT_INSTALLED	The plug-in cannot be enabled because a compatible script debugger is not installed on this system. Install a script debugger, or disable the script debugger option on the general tab of the plug-in's properties page and try again.
0xC00D1583 NS_E_FEATURE_REQUIRES_ENTERPRISE_SERVER	The plug-in cannot be loaded because it requires Windows Server 2003, Enterprise Edition.
0xC00D1584 NS_E_WIZARD_RUNNING	Another wizard is currently running. Please close the other wizard or wait until it finishes before attempting to run this wizard again.
0xC00D1585 NS_E_INVALID_LOG_URL	Invalid log URL. Multicast logging URL must look like "http://servername/isapibackend.dll".
0xC00D1586 NS_E_INVALID_MTU_RANGE	Invalid MTU specified. The valid range for maximum packet size is between 36 and 65507 bytes.
0xC00D1587 NS_E_INVALID_PLAY_STATISTICS	Invalid play statistics for logging.
0xC00D1588 NS_E_LOG_NEED_TO_BE_SKIPPED	The log needs to be skipped.
0xC00D1589 NS_E_HTTP_TEXT_DATACONTAINER_SIZE_LIMIT_EXCEEDED	The size of the data exceeded the limit the WMS HTTP Download Data Source plugin can handle.

<b>Return value/code</b>	<b>Description</b>
0xC00D158A NS_E_PORT_IN_USE	One usage of each socket address (protocol/network address/port) is permitted. Verify that other services or applications are not attempting to use the same port and then try to enable the plug-in again.
0xC00D158B NS_E_PORT_IN_USE_HTTP	One usage of each socket address (protocol/network address/port) is permitted. Verify that other services (such as IIS) or applications are not attempting to use the same port and then try to enable the plug-in again.
0xC00D158C NS_E_HTTP_TEXT_DATACONTAINER_INVALID_SERVER_RESPONSE	The WMS HTTP Download Data Source plugin was unable to receive the remote server's response.
0xC00D158D NS_E_ARCHIVE_REACH_QUOTA	The archive plug-in has reached its quota.
0xC00D158E NS_E_ARCHIVE_ABORT_DUE_TO_BCAST	The archive plug-in aborted because the source was from broadcast.
0xC00D158F NS_E_ARCHIVE_GAP_DETECTED	The archive plug-in detected an interrupt in the source.
0xC00D1590 NS_E_AUTHORIZATION_FILE_NOT_FOUND	The system cannot find the file specified.
0xC00D1B58 NS_E_BAD_MARKIN	The mark-in time should be greater than 0 and less than the mark-out time.
0xC00D1B59 NS_E_BAD_MARKOUT	The mark-out time should be greater than the mark-in time and less than the file duration.
0xC00D1B5A NS_E_NOMATCHING_MEDIASOURCE	No matching media type is found in the source %1.
0xC00D1B5B NS_E_UNSUPPORTED_SOURCETYPE	The specified source type is not supported.
0xC00D1B5C NS_E_TOO_MANY_AUDIO	It is not possible to specify more than one audio input.
0xC00D1B5D NS_E_TOO_MANY_VIDEO	It is not possible to specify more than two video inputs.
0xC00D1B5E NS_E_NOMATCHING_ELEMENT	No matching element is found in the list.
0xC00D1B5F NS_E_MISMATCHED_MEDIACONTENT	The profile's media types must match the media types defined

<b>Return value/code</b>	<b>Description</b>
	for the session.
0xC00D1B60 NS_E_CANNOT_DELETE_ACTIVE_SOURCEGROUP	It is not possible to remove an active source while encoding.
0xC00D1B61 NS_E_AUDIODEVICE_BUSY	It is not possible to open the specified audio capture device because it is currently in use.
0xC00D1B62 NS_E_AUDIODEVICE_UNEXPECTED	It is not possible to open the specified audio capture device because an unexpected error has occurred.
0xC00D1B63 NS_E_AUDIODEVICE_BADFORMAT	The audio capture device does not support the specified audio format.
0xC00D1B64 NS_E_VIDEODEVICE_BUSY	It is not possible to open the specified video capture device because it is currently in use.
0xC00D1B65 NS_E_VIDEODEVICE_UNEXPECTED	It is not possible to open the specified video capture device because an unexpected error has occurred.
0xC00D1B66 NS_E_INVALIDCALL_WHILE_ENCODER_RUNNING	This operation is not allowed while encoding.
0xC00D1B67 NS_E_NO_PROFILE_IN_SOURCEGROUP	No profile is set for the source.
0xC00D1B68 NS_E_VIDEODRIVER_UNSTABLE	The video capture driver returned an unrecoverable error. It is now in an unstable state.
0xC00D1B69 NS_E_VIDCAPSTARTFAILED	It was not possible to start the video device.
0xC00D1B6A NS_E_VIDSOURCECOMPRESSION	The video source does not support the requested output format or color depth.
0xC00D1B6B NS_E_VIDSOURCESIZE	The video source does not support the requested capture size.
0xC00D1B6C NS_E_ICMQUERYFORMAT	It was not possible to obtain output information from the video compressor.
0xC00D1B6D NS_E_VIDCAPCREATEWINDOW	It was not possible to create a video capture window.
0xC00D1B6E NS_E_VIDCAPDRVINUSE	There is already a stream active on this video device.
0xC00D1B6F NS_E_NO_MEDIAFORMAT_IN_SOURCE	No media format is set in source.

<b>Return value/code</b>	<b>Description</b>
0xC00D1B70 NS_E_NO_VALID_OUTPUT_STREAM	Cannot find a valid output stream from the source.
0xC00D1B71 NS_E_NO_VALID_SOURCE_PLUGIN	It was not possible to find a valid source plug-in for the specified source.
0xC00D1B72 NS_E_NO_ACTIVE_SOURCEGROUP	No source is currently active.
0xC00D1B73 NS_E_NO_SCRIPT_STREAM	No script stream is set in the current source.
0xC00D1B74 NS_E_INVALIDCALL_WHILE_ARCHIVAL_RUNNING	This operation is not allowed while archiving.
0xC00D1B75 NS_E_INVALIDPACKETSIZE	The setting for the maximum packet size is not valid.
0xC00D1B76 NS_E_PLUGIN_CLSID_INVALID	The plug-in CLSID specified is not valid.
0xC00D1B77 NS_E_UNSUPPORTED_ARCHIVETYPE	This archive type is not supported.
0xC00D1B78 NS_E_UNSUPPORTED_ARCHIVEOPERATION	This archive operation is not supported.
0xC00D1B79 NS_E_ARCHIVE_FILENAME_NOTSET	The local archive file name was not set.
0xC00D1B7A NS_E_SOURCEGROUP_NOTPREPARED	The source is not yet prepared.
0xC00D1B7B NS_E_PROFILE_MISMATCH	Profiles on the sources do not match.
0xC00D1B7C NS_E_INCORRECTCLIPSETTINGS	The specified crop values are not valid.
0xC00D1B7D NS_E_NOSTATSAVAILABLE	No statistics are available at this time.
0xC00D1B7E NS_E_NOTARCHIVING	The encoder is not archiving.
0xC00D1B7F NS_E_INVALIDCALL_WHILE_ENCODER_STOPPED	This operation is only allowed during encoding.
0xC00D1B80 NS_E_NOSOURCEGROUPS	This SourceGroupCollection doesn't contain any SourceGroups.
0xC00D1B81 NS_E_INVALIDINPUTFPS	This source does not have a frame rate of 30 fps. Therefore, it is not possible to apply the inverse telecine filter to the source.

<b>Return value/code</b>	<b>Description</b>
0xC00D1B82 NS_E_NO_DATAVIEW_SUPPORT	It is not possible to display your source or output video in the Video panel.
0xC00D1B83 NS_E_CODEC_UNAVAILABLE	One or more codecs required to open this content could not be found.
0xC00D1B84 NS_E_ARCHIVE_SAME_AS_INPUT	The archive file has the same name as an input file. Change one of the names before continuing.
0xC00D1B85 NS_E_SOURCE_NOTSPECIFIED	The source has not been set up completely.
0xC00D1B86 NS_E_NO_REALTIME_TIMECOMPRESSION	It is not possible to apply time compression to a broadcast session.
0xC00D1B87 NS_E_UNSUPPORTED_ENCODER_DEVICE	It is not possible to open this device.
0xC00D1B88 NS_E_UNEXPECTED_DISPLAY_SETTINGS	It is not possible to start encoding because the display size or color has changed since the current session was defined. Restore the previous settings or create a new session.
0xC00D1B89 NS_E_NO_AUDIODATA	No audio data has been received for several seconds. Check the audio source and restart the encoder.
0xC00D1B8A NS_E_INPUTSOURCE_PROBLEM	One or all of the specified sources are not working properly. Check that the sources are configured correctly.
0xC00D1B8B NS_E_WME_VERSION_MISMATCH	The supplied configuration file is not supported by this version of the encoder.
0xC00D1B8C NS_E_NO_REALTIME_PREPROCESS	It is not possible to use image preprocessing with live encoding.
0xC00D1B8D NS_E_NO_REPEAT_PREPROCESS	It is not possible to use two-pass encoding when the source is set to loop.
0xC00D1B8E NS_E_CANNOT_PAUSE_LIVEBROADCAST	It is not possible to pause encoding during a broadcast.
0xC00D1B8F NS_E_DRM_PROFILE_NOT_SET	A DRM profile has not been set for the current session.
0xC00D1B90 NS_E_DUPLICATE_DRMPROFILE	The profile ID is already used by a DRM profile. Specify a

<b>Return value/code</b>	<b>Description</b>
	different profile ID.
0xC00D1B91 NS_E_INVALID_DEVICE	The setting of the selected device does not support control for playing back tapes.
0xC00D1B92 NS_E_SPEECHEDL_ON_NON_MIXEDMODE	You must specify a mixed voice and audio mode in order to use an optimization definition file.
0xC00D1B93 NS_E_DRM_PASSWORD_TOO_LONG	The specified password is too long. Type a password with fewer than 8 characters.
0xC00D1B94 NS_E_DEVCONTROL_FAILED_SEEK	It is not possible to seek to the specified mark-in point.
0xC00D1B95 NS_E_INTERLACE_REQUIRE_SAMESIZE	When you choose to maintain the interlacing in your video, the output video size must match the input video size.
0xC00D1B96 NS_E_TOO_MANY_DEVICECONTROL	Only one device control plug-in can control a device.
0xC00D1B97 NS_E_NO_MULTIPASS_FOR_LIVEDEVICE	You must also enable storing content to hard disk temporarily in order to use two-pass encoding with the input device.
0xC00D1B98 NS_E_MISSING_AUDIENCE	An audience is missing from the output stream configuration.
0xC00D1B99 NS_E_AUDIENCE_CONTENTTYPE_MISMATCH	All audiences in the output tree must have the same content type.
0xC00D1B9A NS_E_MISSING_SOURCE_INDEX	A source index is missing from the output stream configuration.
0xC00D1B9B NS_E_NUM_LANGUAGE_MISMATCH	The same source index in different audiences should have the same number of languages.
0xC00D1B9C NS_E_LANGUAGE_MISMATCH	The same source index in different audiences should have the same languages.
0xC00D1B9D NS_E_VBRMODE_MISMATCH	The same source index in different audiences should use the same VBR encoding mode.
0xC00D1B9E NS_E_INVALID_INPUT_AUDIENCE_INDEX	The bit rate index specified is not valid.
0xC00D1B9F NS_E_INVALID_INPUT_LANGUAGE	The specified language is not valid.
0xC00D1BA0 NS_E_INVALID_INPUT_STREAM	The specified source type is not valid.

<b>Return value/code</b>	<b>Description</b>
0xC00D1BA1 NS_E_EXPECT_MONO_WAV_INPUT	The source must be a mono channel .wav file.
0xC00D1BA2 NS_E_INPUT_WAVFORMAT_MISMATCH	All the source .wav files must have the same format.
0xC00D1BA3 NS_E_RECORDQ_DISK_FULL	The hard disk being used for temporary storage of content has reached the minimum allowed disk space. Create more space on the hard disk and restart encoding.
0xC00D1BA4 NS_E_NO_PAL_INVERSE_TELECINE	It is not possible to apply the inverse telecine feature to PAL content.
0xC00D1BA5 NS_E_ACTIVE_SG_DEVICE_DISCONNECTED	A capture device in the current active source is no longer available.
0xC00D1BA6 NS_E_ACTIVE_SG_DEVICE_CONTROL_DISCONNECTED	A device used in the current active source for device control is no longer available.
0xC00D1BA7 NS_E_NO_FRAMES_SUBMITTED_TO_ANALYZER	No frames have been submitted to the analyzer for analysis.
0xC00D1BA8 NS_E_INPUT_DOESNOT_SUPPORT_SMPTE	The source video does not support time codes.
0xC00D1BA9 NS_E_NO_SMPTE_WITH_MULTIPLE_SOURCEGROUPS	It is not possible to generate a time code when there are multiple sources in a session.
0xC00D1BAA NS_E_BAD_CONTENTEDL	The voice codec optimization definition file cannot be found or is corrupted.
0xC00D1BAB NS_E_INTERLACEMODE_MISMATCH	The same source index in different audiences should have the same interlace mode.
0xC00D1BAC NS_E_NONSQUAREPIXELMODE_MISMATCH	The same source index in different audiences should have the same nonsquare pixel mode.
0xC00D1BAD NS_E_SMPTEMODE_MISMATCH	The same source index in different audiences should have the same time code mode.
0xC00D1BAE NS_E_END_OF_TAPE	Either the end of the tape has been reached or there is no tape. Check the device and tape.
0xC00D1BAF NS_E_NO_MEDIA_IN_AUDIENCE	No audio or video input has been specified.
0xC00D1BB0	The profile must contain a bit

<b>Return value/code</b>	<b>Description</b>
NS_E_NO_AUDIENCES	rate.
0xC00D1BB1 NS_E_NO_AUDIO_COMPAT	You must specify at least one audio stream to be compatible with Windows Media Player 7.1.
0xC00D1BB2 NS_E_INVALID_VBR_COMPAT	Using a VBR encoding mode is not compatible with Windows Media Player 7.1.
0xC00D1BB3 NS_E_NO_PROFILE_NAME	You must specify a profile name.
0xC00D1BB4 NS_E_INVALID_VBR_WITH_UNCOMP	It is not possible to use a VBR encoding mode with uncompressed audio or video.
0xC00D1BB5 NS_E_MULTIPLE_VBR_AUDIENCES	It is not possible to use MBR encoding with VBR encoding.
0xC00D1BB6 NS_E_UNCOMP_COMP_COMBINATION	It is not possible to mix uncompressed and compressed content in a session.
0xC00D1BB7 NS_E_MULTIPLE_AUDIO_CODECS	All audiences must use the same audio codec.
0xC00D1BB8 NS_E_MULTIPLE_AUDIO_FORMATS	All audiences should use the same audio format to be compatible with Windows Media Player 7.1.
0xC00D1BB9 NS_E_AUDIO_BITRATE_STEPDOWN	The audio bit rate for an audience with a higher total bit rate must be greater than one with a lower total bit rate.
0xC00D1BBA NS_E_INVALID_AUDIO_PEAKRATE	The audio peak bit rate setting is not valid.
0xC00D1BBB NS_E_INVALID_AUDIO_PEAKRATE_2	The audio peak bit rate setting must be greater than the audio bit rate setting.
0xC00D1BBC NS_E_INVALID_AUDIO_BUFFERMAX	The setting for the maximum buffer size for audio is not valid.
0xC00D1BBD NS_E_MULTIPLE_VIDEO_CODECS	All audiences must use the same video codec.
0xC00D1BBE NS_E_MULTIPLE_VIDEO_SIZES	All audiences should use the same video size to be compatible with Windows Media Player 7.1.
0xC00D1BBF NS_E_INVALID_VIDEO_BITRATE	The video bit rate setting is not valid.
0xC00D1BC0 NS_E_VIDEO_BITRATE_STEPDOWN	The video bit rate for an audience with a higher total bit rate must be greater than one

<b>Return value/code</b>	<b>Description</b>
	with a lower total bit rate.
0xC00D1BC1 NS_E_INVALID_VIDEO_PEAKRATE	The video peak bit rate setting is not valid.
0xC00D1BC2 NS_E_INVALID_VIDEO_PEAKRATE_2	The video peak bit rate setting must be greater than the video bit rate setting.
0xC00D1BC3 NS_E_INVALID_VIDEO_WIDTH	The video width setting is not valid.
0xC00D1BC4 NS_E_INVALID_VIDEO_HEIGHT	The video height setting is not valid.
0xC00D1BC5 NS_E_INVALID_VIDEO_FPS	The video frame rate setting is not valid.
0xC00D1BC6 NS_E_INVALID_VIDEO_KEYFRAME	The video key frame setting is not valid.
0xC00D1BC7 NS_E_INVALID_VIDEO_IQUALITY	The video image quality setting is not valid.
0xC00D1BC8 NS_E_INVALID_VIDEO_CQUALITY	The video codec quality setting is not valid.
0xC00D1BC9 NS_E_INVALID_VIDEO_BUFFER	The video buffer setting is not valid.
0xC00D1BCA NS_E_INVALID_VIDEO_BUFFERMAX	The setting for the maximum buffer size for video is not valid.
0xC00D1BCB NS_E_INVALID_VIDEO_BUFFERMAX_2	The value of the video maximum buffer size setting must be greater than the video buffer size setting.
0xC00D1BCC NS_E_INVALID_VIDEO_WIDTH_ALIGN	The alignment of the video width is not valid.
0xC00D1BCD NS_E_INVALID_VIDEO_HEIGHT_ALIGN	The alignment of the video height is not valid.
0xC00D1BCE NS_E_MULTIPLE_SCRIPT_BITRATES	All bit rates must have the same script bit rate.
0xC00D1BCF NS_E_INVALID_SCRIPT_BITRATE	The script bit rate specified is not valid.
0xC00D1BD0 NS_E_MULTIPLE_FILE_BITRATES	All bit rates must have the same file transfer bit rate.
0xC00D1BD1 NS_E_INVALID_FILE_BITRATE	The file transfer bit rate is not valid.
0xC00D1BD2 NS_E_SAME_AS_INPUT_COMBINATION	All audiences in a profile should either be same as input or have video width and height

Return value/code	Description
	specified.
0xC00D1BD3 NS_E_SOURCE_CANNOT_LOOP	This source type does not support looping.
0xC00D1BD4 NS_E_INVALID_FOLDDOWN_COEFFICIENTS	The fold-down value needs to be between -144 and 0.
0xC00D1BD5 NS_E_DRMPROFILE_NOTFOUND	The specified DRM profile does not exist in the system.
0xC00D1BD6 NS_E_INVALID_TIMECODE	The specified time code is not valid.
0xC00D1BD7 NS_E_NO_AUDIO_TIMECOMPRESSION	It is not possible to apply time compression to a video-only session.
0xC00D1BD8 NS_E_NO_TWOPASS_TIMECOMPRESSION	It is not possible to apply time compression to a session that is using two-pass encoding.
0xC00D1BD9 NS_E_TIMECODE_REQUIRES_VIDEOSTREAM	It is not possible to generate a time code for an audio-only session.
0xC00D1BDA NS_E_NO_MBR_WITH_TIMECODE	It is not possible to generate a time code when you are encoding content at multiple bit rates.
0xC00D1BDB NS_E_INVALID_INTERLACEMODE	The video codec selected does not support maintaining interlacing in video.
0xC00D1BDC NS_E_INVALID_INTERLACE_COMPAT	Maintaining interlacing in video is not compatible with Windows Media Player 7.1.
0xC00D1BDD NS_E_INVALID_NONSQUAREPIXEL_COMPAT	Allowing nonsquare pixel output is not compatible with Windows Media Player 7.1.
0xC00D1BDE NS_E_INVALID_SOURCE_WITH_DEVICE_CONTROL	Only capture devices can be used with device control.
0xC00D1BDF NS_E_CANNOT_GENERATE_BROADCAST_INFO_FOR_QUALITYVBR	It is not possible to generate the stream format file if you are using quality-based VBR encoding for the audio or video stream. Instead use the Windows Media file generated after encoding to create the announcement file.
0xC00D1BE0 NS_E_EXCEED_MAX_DRM_PROFILE_LIMIT	It is not possible to create a DRM profile because the maximum number of profiles has been reached. You must delete some DRM profiles before creating new ones.

Return value/code	Description
0xC00D1BE1 NS_E_DEVICECONTROL_UNSTABLE	The device is in an unstable state. Check that the device is functioning properly and a tape is in place.
0xC00D1BE2 NS_E_INVALID_PIXEL_ASPECT_RATIO	The pixel aspect ratio value must be between 1 and 255.
0xC00D1BE3 NS_E_AUDIENCE__LANGUAGE_CONTENTTYPE_MISMATCH	All streams with different languages in the same audience must have same properties.
0xC00D1BE4 NS_E_INVALID_PROFILE_CONTENTTYPE	The profile must contain at least one audio or video stream.
0xC00D1BE5 NS_E_TRANSFORM_PLUGIN_NOT_FOUND	The transform plug-in could not be found.
0xC00D1BE6 NS_E_TRANSFORM_PLUGIN_INVALID	The transform plug-in is not valid. It <b>may</b> be damaged or you <b>may</b> not have the required permissions to access the plug-in.
0xC00D1BE7 NS_E_EDL_REQUIRED_FOR_DEVICE_MULTIPASS	To use two-pass encoding, you must enable device control and setup an edit decision list (EDL) that has at least one entry.
0xC00D1BE8 NS_E_INVALID_VIDEO_WIDTH_FOR_INTERLACED_ENCODING	When you choose to maintain the interlacing in your video, the output video size must be a multiple of 4.
0xC00D1BE9 NS_E_MARKIN_UNSUPPORTED	Markin/Markout is unsupported with this source type.
0xC00D2711 NS_E_DRM_INVALID_APPLICATION	A problem has occurred in the Digital Rights Management component. Contact product support for this application.
0xC00D2712 NS_E_DRM_LICENSE_STORE_ERROR	License storage is not working. Contact Microsoft product support.
0xC00D2713 NS_E_DRM_SECURE_STORE_ERROR	Secure storage is not working. Contact Microsoft product support.
0xC00D2714 NS_E_DRM_LICENSE_STORE_SAVE_ERROR	License acquisition did not work. Acquire a new license or contact the content provider for further assistance.
0xC00D2715 NS_E_DRM_SECURE_STORE_UNLOCK_ERROR	A problem has occurred in the Digital Rights Management component. Contact Microsoft product support.
0xC00D2716	The media file is corrupted. Contact the content provider to

<b>Return value/code</b>	<b>Description</b>
NS_E_DRM_INVALID_CONTENT	get a new file.
0xC00D2717 NS_E_DRM_UNABLE_TO_OPEN_LICENSE	The license is corrupted. Acquire a new license.
0xC00D2718 NS_E_DRM_INVALID_LICENSE	The license is corrupted or invalid. Acquire a new license
0xC00D2719 NS_E_DRM_INVALID_MACHINE	Licenses cannot be copied from one computer to another. Use License Management to transfer licenses, or get a new license for the media file.
0xC00D271B NS_E_DRM_ENUM_LICENSE_FAILED	License storage is not working. Contact Microsoft product support.
0xC00D271C NS_E_DRM_INVALID_LICENSE_REQUEST	The media file is corrupted. Contact the content provider to get a new file.
0xC00D271D NS_E_DRM_UNABLE_TO_INITIALIZE	A problem has occurred in the Digital Rights Management component. Contact Microsoft product support.
0xC00D271E NS_E_DRM_UNABLE_TO_ACQUIRE_LICENSE	The license could not be acquired. Try again later.
0xC00D271F NS_E_DRM_INVALID_LICENSE_ACQUIRED	License acquisition did not work. Acquire a new license or contact the content provider for further assistance.
0xC00D2720 NS_E_DRM_NO_RIGHTS	The requested operation cannot be performed on this file.
0xC00D2721 NS_E_DRM_KEY_ERROR	The requested action cannot be performed because a problem occurred with the Windows Media Digital Rights Management (DRM) components on your computer.
0xC00D2722 NS_E_DRM_ENCRYPT_ERROR	A problem has occurred in the Digital Rights Management component. Contact Microsoft product support.
0xC00D2723 NS_E_DRM_DECRYPT_ERROR	The media file is corrupted. Contact the content provider to get a new file.
0xC00D2725 NS_E_DRM_LICENSE_INVALID_XML	The license is corrupted. Acquire a new license.
0xC00D2728 NS_E_DRM_NEEDS_INDIVIDUALIZATION	A security upgrade is required to perform the operation on this media file.

<b>Return value/code</b>	<b>Description</b>
0xC00D2729 NS_E_DRM_ALREADY_INDIVIDUALIZED	You already have the latest security components. No upgrade is necessary at this time.
0xC00D272A NS_E_DRM_ACTION_NOT_QUERIED	The application cannot perform this action. Contact product support for this application.
0xC00D272B NS_E_DRM_ACQUIRING_LICENSE	You cannot begin a new license acquisition process until the current one has been completed.
0xC00D272C NS_E_DRM_INDIVIDUALIZING	You cannot begin a new security upgrade until the current one has been completed.
0xC00D272D NS_E_BACKUP_RESTORE_FAILURE	Failure in Backup-Restore.
0xC00D272E NS_E_BACKUP_RESTORE_BAD_REQUEST_ID	Bad Request ID in Backup-Restore.
0xC00D272F NS_E_DRM_PARAMETERS_MISMATCHED	A problem has occurred in the Digital Rights Management component. Contact Microsoft product support.
0xC00D2730 NS_E_DRM_UNABLE_TO_CREATE_LICENSE_OBJECT	A license cannot be created for this media file. Reinstall the application.
0xC00D2731 NS_E_DRM_UNABLE_TO_CREATE_INDI_OBJECT	A problem has occurred in the Digital Rights Management component. Contact Microsoft product support.
0xC00D2732 NS_E_DRM_UNABLE_TO_CREATE_ENCRYPT_OBJECT	A problem has occurred in the Digital Rights Management component. Contact Microsoft product support.
0xC00D2733 NS_E_DRM_UNABLE_TO_CREATE_DECRYPT_OBJECT	A problem has occurred in the Digital Rights Management component. Contact Microsoft product support.
0xC00D2734 NS_E_DRM_UNABLE_TO_CREATE_PROPERTIES_OBJECT	A problem has occurred in the Digital Rights Management component. Contact Microsoft product support.
0xC00D2735 NS_E_DRM_UNABLE_TO_CREATE_BACKUP_OBJECT	A problem has occurred in the Digital Rights Management component. Contact Microsoft product support.
0xC00D2736 NS_E_DRM_INDIVIDUALIZE_ERROR	The security upgrade failed. Try again later.
0xC00D2737	License storage is not working.

<b>Return value/code</b>	<b>Description</b>
NS_E_DRM_LICENSE_OPEN_ERROR	Contact Microsoft product support.
0xC00D2738 NS_E_DRM_LICENSE_CLOSE_ERROR	License storage is not working. Contact Microsoft product support.
0xC00D2739 NS_E_DRM_GET_LICENSE_ERROR	License storage is not working. Contact Microsoft product support.
0xC00D273A NS_E_DRM_QUERY_ERROR	A problem has occurred in the Digital Rights Management component. Contact Microsoft product support.
0xC00D273B NS_E_DRM_REPORT_ERROR	A problem has occurred in the Digital Rights Management component. Contact product support for this application.
0xC00D273C NS_E_DRM_GET_LICENSESTRING_ERROR	License storage is not working. Contact Microsoft product support.
0xC00D273D NS_E_DRM_GET_CONTENTSTRING_ERROR	The media file is corrupted. Contact the content provider to get a new file.
0xC00D273E NS_E_DRM_MONITOR_ERROR	A problem has occurred in the Digital Rights Management component. Try again later.
0xC00D273F NS_E_DRM_UNABLE_TO_SET_PARAMETER	The application has made an invalid call to the Digital Rights Management component. Contact product support for this application.
0xC00D2740 NS_E_DRM_INVALID_APPDATA	A problem has occurred in the Digital Rights Management component. Contact Microsoft product support.
0xC00D2741 NS_E_DRM_INVALID_APPDATA_VERSION	A problem has occurred in the Digital Rights Management component. Contact product support for this application.
0xC00D2742 NS_E_DRM_BACKUP_EXISTS	Licenses are already backed up in this location.
0xC00D2743 NS_E_DRM_BACKUP_CORRUPT	One or more backed-up licenses are missing or corrupt.
0xC00D2744 NS_E_DRM_BACKUPRESTORE_BUSY	You cannot begin a new backup process until the current process has been completed.
0xC00D2745 NS_E_BACKUP_RESTORE_BAD_DATA	Bad Data sent to Backup-Restore.

<b>Return value/code</b>	<b>Description</b>
0xC00D2748 NS_E_DRM_LICENSE_UNUSABLE	The license is invalid. Contact the content provider for further assistance.
0xC00D2749 NS_E_DRM_INVALID_PROPERTY	A required property was not set by the application. Contact product support for this application.
0xC00D274A NS_E_DRM_SECURE_STORE_NOT_FOUND	A problem has occurred in the Digital Rights Management component of this application. Try to acquire a license again.
0xC00D274B NS_E_DRM_CACHED_CONTENT_ERROR	A license cannot be found for this media file. Use License Management to transfer a license for this file from the original computer, or acquire a new license.
0xC00D274C NS_E_DRM_INDIVIDUALIZATION_INCOMPLETE	A problem occurred during the security upgrade. Try again later.
0xC00D274D NS_E_DRM_DRIVER_AUTH_FAILURE	Certified driver components are required to play this media file. Contact Windows Update to see whether updated drivers are available for your hardware.
0xC00D274E NS_E_DRM_NEED_UPGRADE_MSSAP	One or more of the Secure Audio Path components were not found or an entry point in those components was not found.
0xC00D274F NS_E_DRM_REOPEN_CONTENT	Status message: Reopen the file.
0xC00D2750 NS_E_DRM_DRIVER_DIGIOUT_FAILURE	Certain driver functionality is required to play this media file. Contact Windows Update to see whether updated drivers are available for your hardware.
0xC00D2751 NS_E_DRM_INVALID_SECURESTORE_PASSWORD	A problem has occurred in the Digital Rights Management component. Contact Microsoft product support.
0xC00D2752 NS_E_DRM_APPCERT_REVOKED	A problem has occurred in the Digital Rights Management component. Contact Microsoft product support.
0xC00D2753 NS_E_DRM_RESTORE_FRAUD	You cannot restore your license(s).
0xC00D2754 NS_E_DRM_HARDWARE_INCONSISTENT	The licenses for your media files are corrupted. Contact Microsoft product support.

<b>Return value/code</b>	<b>Description</b>
0xC00D2755 NS_E_DRM_SDMI_TRIGGER	To transfer this media file, you must upgrade the application.
0xC00D2756 NS_E_DRM_SDMI_NOMORECOPIES	You cannot make any more copies of this media file.
0xC00D2757 NS_E_DRM_UNABLE_TO_CREATE_HEADER_OBJECT	A problem has occurred in the Digital Rights Management component. Contact Microsoft product support.
0xC00D2758 NS_E_DRM_UNABLE_TO_CREATE_KEYS_OBJECT	A problem has occurred in the Digital Rights Management component. Contact Microsoft product support.
0xC00D2759 NS_E_DRM_LICENSE_NOTACQUIRED	Unable to obtain license.
0xC00D275A NS_E_DRM_UNABLE_TO_CREATE_CODING_OBJECT	A problem has occurred in the Digital Rights Management component. Contact Microsoft product support.
0xC00D275B NS_E_DRM_UNABLE_TO_CREATE_STATE_DATA_OBJECT	A problem has occurred in the Digital Rights Management component. Contact Microsoft product support.
0xC00D275C NS_E_DRM_BUFFER_TOO_SMALL	The buffer supplied is not sufficient.
0xC00D275D NS_E_DRM_UNSUPPORTED_PROPERTY	The property requested is not supported.
0xC00D275E NS_E_DRM_ERROR_BAD_NET_RESP	The specified server cannot perform the requested operation.
0xC00D275F NS_E_DRM_STORE_NOTALLSTORED	Some of the licenses could not be stored.
0xC00D2760 NS_E_DRM_SECURITY_COMPONENT_SIGNATURE_INVALID	The Digital Rights Management security upgrade component could not be validated. Contact Microsoft product support.
0xC00D2761 NS_E_DRM_INVALID_DATA	Invalid or corrupt data was encountered.
0xC00D2762 NS_E_DRM_POLICY_DISABLE_ONLINE	The Windows Media Digital Rights Management system cannot perform the requested action because your computer or network administrator has enabled the group policy Prevent Windows Media DRM Internet Access. For assistance, contact your administrator.

Return value/code	Description
0xC00D2763 NS_E_DRM_UNABLE_TO_CREATE_AUTHENTICATION_OBJECT	A problem has occurred in the Digital Rights Management component. Contact Microsoft product support.
0xC00D2764 NS_E_DRM_NOT_CONFIGURED	Not all of the necessary properties for DRM have been set.
0xC00D2765 NS_E_DRM_DEVICE_ACTIVATION_CANCELED	The portable device does not have the security required to copy protected files to it. To obtain the additional security, try to copy the file to your portable device again. When a message appears, click OK.
0xC00D2766 NS_E_BACKUP_RESTORE_TOO_MANY_RESETS	Too many resets in Backup-Restore.
0xC00D2767 NS_E_DRM_DEBUGGING_NOT_ALLOWED	Running this process under a debugger while using DRM content is not allowed.
0xC00D2768 NS_E_DRM_OPERATION_CANCELED	The user canceled the DRM operation.
0xC00D2769 NS_E_DRM_RESTRICTIONS_NOT_RETRIEVED	The license you are using has associated output restrictions. This license is unusable until these restrictions are queried.
0xC00D276A NS_E_DRM_UNABLE_TO_CREATE_PLAYLIST_OBJECT	A problem has occurred in the Digital Rights Management component. Contact Microsoft product support.
0xC00D276B NS_E_DRM_UNABLE_TO_CREATE_PLAYLIST_BURN_OBJECT	A problem has occurred in the Digital Rights Management component. Contact Microsoft product support.
0xC00D276C NS_E_DRM_UNABLE_TO_CREATE_DEVICE_REGISTRATION_OBJECT	A problem has occurred in the Digital Rights Management component. Contact Microsoft product support.
0xC00D276D NS_E_DRM_UNABLE_TO_CREATE_METERING_OBJECT	A problem has occurred in the Digital Rights Management component. Contact Microsoft product support.
0xC00D2770 NS_E_DRM_TRACK_EXCEEDED_PLAYLIST_RESTICTION	The specified track has exceeded it's specified playlist burn limit in this playlist.
0xC00D2771 NS_E_DRM_TRACK_EXCEEDED_TRACKBURN_RESTRICTION	The specified track has exceeded it's track burn limit.
0xC00D2772 NS_E_DRM_UNABLE_TO_GET_DEVICE_CERT	A problem has occurred in obtaining the device's certificate. Contact Microsoft

Return value/code	Description
	product support.
0xC00D2773 NS_E_DRM_UNABLE_TO_GET_SECURE_CLOCK	A problem has occurred in obtaining the device's secure clock. Contact Microsoft product support.
0xC00D2774 NS_E_DRM_UNABLE_TO_SET_SECURE_CLOCK	A problem has occurred in setting the device's secure clock. Contact Microsoft product support.
0xC00D2775 NS_E_DRM_UNABLE_TO_GET_SECURE_CLOCK_FROM_SERVER	A problem has occurred in obtaining the secure clock from server. Contact Microsoft product support.
0xC00D2776 NS_E_DRM_POLICY_METERING_DISABLED	This content requires the metering policy to be enabled.
0xC00D2777 NS_E_DRM_TRANSFER_CHAINED_LICENSES_UNSUPPORTED	Transfer of chained licenses unsupported.
0xC00D2778 NS_E_DRM_SDK_VERSIONMISMATCH	The Digital Rights Management component is not installed properly. Reinstall the Player.
0xC00D2779 NS_E_DRM_LIC_NEEDS_DEVICE_CLOCK_SET	The file could not be transferred because the device clock is not set.
0xC00D277A NS_E_LICENSE_HEADER_MISSING_URL	The content header is missing an acquisition URL.
0xC00D277B NS_E_DEVICE_NOT_WMDRM_DEVICE	The current attached device does not support WMDRM.
0xC00D277C NS_E_DRM_INVALID_APPCERT	A problem has occurred in the Digital Rights Management component. Contact Microsoft product support.
0xC00D277D NS_E_DRM_PROTOCOL_FORCEFUL_TERMINATION_ON_PETITION	The client application has been forcefully terminated during a DRM petition.
0xC00D277E NS_E_DRM_PROTOCOL_FORCEFUL_TERMINATION_ON_CHALLENGE	The client application has been forcefully terminated during a DRM challenge.
0xC00D277F NS_E_DRM_CHECKPOINT_FAILED	Secure storage protection error. Restore your licenses from a previous backup and try again.
0xC00D2780 NS_E_DRM_BB_UNABLE_TO_INITIALIZE	A problem has occurred in the Digital Rights Management root of trust. Contact Microsoft product support.
0xC00D2781 NS_E_DRM_UNABLE_TO_LOAD_HARDWARE_ID	A problem has occurred in retrieving the Digital Rights Management machine

Return value/code	Description
	identification. Contact Microsoft product support.
0xC00D2782 NS_E_DRM_UNABLE_TO_OPEN_DATA_STORE	A problem has occurred in opening the Digital Rights Management data storage file. Contact Microsoft product.
0xC00D2783 NS_E_DRM_DATASTORE_CORRUPT	The Digital Rights Management data storage is not functioning properly. Contact Microsoft product support.
0xC00D2784 NS_E_DRM_UNABLE_TO_CREATE_INMEMORYSTORE_OBJECT	A problem has occurred in the Digital Rights Management component. Contact Microsoft product support.
0xC00D2785 NS_E_DRM_STUBLIB_REQUIRED	A secured library is required to access the requested functionality.
0xC00D2786 NS_E_DRM_UNABLE_TO_CREATE_CERTIFICATE_OBJECT	A problem has occurred in the Digital Rights Management component. Contact Microsoft product support.
0xC00D2787 NS_E_DRM_MIGRATION_TARGET_NOT_ONLINE	A problem has occurred in the Digital Rights Management component during license migration. Contact Microsoft product support.
0xC00D2788 NS_E_DRM_INVALID_MIGRATION_IMAGE	A problem has occurred in the Digital Rights Management component during license migration. Contact Microsoft product support.
0xC00D2789 NS_E_DRM_MIGRATION_TARGET_STATES_CORRUPTED	A problem has occurred in the Digital Rights Management component during license migration. Contact Microsoft product support.
0xC00D278A NS_E_DRM_MIGRATION_IMPORTER_NOT_AVAILABLE	A problem has occurred in the Digital Rights Management component during license migration. Contact Microsoft product support.
0xC00D278B NS_DRM_E_MIGRATION_UPGRADE_WITH_DIFF_SID	A problem has occurred in the Digital Rights Management component during license migration. Contact Microsoft product support.
0xC00D278C NS_DRM_E_MIGRATION_SOURCE_MACHINE_IN_USE	The Digital Rights Management component is in use during license migration. Contact Microsoft product support.
0xC00D278D	Licenses are being migrated to

<b>Return value/code</b>	<b>Description</b>
NS_DRM_E_MIGRATION_TARGET_MACHINE_LESS_THAN_LH	a machine running XP or downlevel OS. This operation can only be performed on Windows Vista or a later OS. Contact Microsoft product support.
0xC00D278E NS_DRM_E_MIGRATION_IMAGE_ALREADY_EXISTS	Migration Image already exists. Contact Microsoft product support.
0xC00D278F NS_E_DRM_HARDWAREID_MISMATCH	The requested action cannot be performed because a hardware configuration change has been detected by the Windows Media Digital Rights Management (DRM) components on your computer.
0xC00D2790 NS_E_INVALID_DRMV2CLT_STUBLIB	The wrong stublib has been linked to an application or DLL using drmv2clt.dll.
0xC00D2791 NS_E_DRM_MIGRATION_INVALID_LEGACYV2_DATA	The legacy V2 data being imported is invalid.
0xC00D2792 NS_E_DRM_MIGRATION_LICENSE_ALREADY_EXISTS	The license being imported already exists.
0xC00D2793 NS_E_DRM_MIGRATION_INVALID_LEGACYV2_SST_PASSWORD	The password of the Legacy V2 SST entry being imported is incorrect.
0xC00D2794 NS_E_DRM_MIGRATION_NOT_SUPPORTED	Migration is not supported by the plugin.
0xC00D2795 NS_E_DRM_UNABLE_TO_CREATE_MIGRATION_IMPORTER_OBJECT	A migration importer cannot be created for this media file. Reinstall the application.
0xC00D2796 NS_E_DRM_CHECKPOINT_MISMATCH	The requested action cannot be performed because a problem occurred with the Windows Media Digital Rights Management (DRM) components on your computer.
0xC00D2797 NS_E_DRM_CHECKPOINT_CORRUPT	The requested action cannot be performed because a problem occurred with the Windows Media Digital Rights Management (DRM) components on your computer.
0xC00D2798 NS_E_REG_FLUSH_FAILURE	The requested action cannot be performed because a problem occurred with the Windows Media Digital Rights Management (DRM) components on your computer.
0xC00D2799	The requested action cannot be

<b>Return value/code</b>	<b>Description</b>
NS_E_HDS_KEY_MISMATCH	performed because a problem occurred with the Windows Media Digital Rights Management (DRM) components on your computer.
0xC00D279A NS_E_DRM_MIGRATION_OPERATION_CANCELLED	Migration was canceled by the user.
0xC00D279B NS_E_DRM_MIGRATION_OBJECT_IN_USE	Migration object is already in use and cannot be called until the current operation completes.
0xC00D279C NS_E_DRM_MALFORMED_CONTENT_HEADER	The content header does not comply with DRM requirements and cannot be used.
0xC00D27D8 NS_E_DRM_LICENSE_EXPIRED	The license for this file has expired and is no longer valid. Contact your content provider for further assistance.
0xC00D27D9 NS_E_DRM_LICENSE_NOTENABLED	The license for this file is not valid yet, but will be at a future date.
0xC00D27DA NS_E_DRM_LICENSE_APPSECLOW	The license for this file requires a higher level of security than the player you are currently using has. Try using a different player or download a newer version of your current player.
0xC00D27DB NS_E_DRM_STORE_NEEDINDI	The license cannot be stored as it requires security upgrade of Digital Rights Management component.
0xC00D27DC NS_E_DRM_STORE_NOTALLOWED	Your machine does not meet the requirements for storing the license.
0xC00D27DD NS_E_DRM_LICENSE_APP_NOTALLOWED	The license for this file requires an upgraded version of your player or a different player.
0xC00D27DF NS_E_DRM_LICENSE_CERT_EXPIRED	The license server's certificate expired. Make sure your system clock is set correctly. Contact your content provider for further assistance.
0xC00D27E0 NS_E_DRM_LICENSE_SECLow	The license for this file requires a higher level of security than the player you are currently using has. Try using a different player or download a newer version of your current player.
0xC00D27E1 NS_E_DRM_LICENSE_CONTENT_REVOKED	The content owner for the license you just acquired is no longer supporting their content.

Return value/code	Description
	Contact the content owner for a newer version of the content.
0xC00D27E2 NS_E_DRM_DEVICE_NOT_REGISTERED	The content owner for the license you just acquired requires your device to register to the current machine.
0xC00D280A NS_E_DRM_LICENSE_NOSAP	The license for this file requires a feature that is not supported in your current player or operating system. You can try with newer version of your current player or contact your content provider for further assistance.
0xC00D280B NS_E_DRM_LICENSE_NOSVP	The license for this file requires a feature that is not supported in your current player or operating system. You can try with newer version of your current player or contact your content provider for further assistance.
0xC00D280C NS_E_DRM_LICENSE_NOWDM	The license for this file requires Windows Driver Model (WDM) audio drivers. Contact your sound card manufacturer for further assistance.
0xC00D280D NS_E_DRM_LICENSE_NOTRUSTEDCODEC	The license for this file requires a higher level of security than the player you are currently using has. Try using a different player or download a newer version of your current player.
0xC00D280E NS_E_DRM_SOURCEID_NOT_SUPPORTED	The license for this file is not supported by your current player. You can try with newer version of your current player or contact your content provider for further assistance.
0xC00D283D NS_E_DRM_NEEDS_UPGRADE_TEMPFILE	An updated version of your media player is required to play the selected content.
0xC00D283E NS_E_DRM_NEED_UPGRADE_PD	A new version of the Digital Rights Management component is required. Contact product support for this application to get the latest version.
0xC00D283F NS_E_DRM_SIGNATURE_FAILURE	Failed to either create or verify the content header.
0xC00D2840 NS_E_DRM_LICENSE_SERVER_INFO_MISSING	Could not read the necessary information from the system registry.

<b>Return value/code</b>	<b>Description</b>
0xC00D2841 NS_E_DRM_BUSY	The DRM subsystem is currently locked by another application or user. Try again later.
0xC00D2842 NS_E_DRM_PD_TOO_MANY_DEVICES	There are too many target devices registered on the portable media.
0xC00D2843 NS_E_DRM_INDIV_FRAUD	The security upgrade cannot be completed because the allowed number of daily upgrades has been exceeded. Try again tomorrow.
0xC00D2844 NS_E_DRM_INDIV_NO_CABS	The security upgrade cannot be completed because the server is unable to perform the operation. Try again later.
0xC00D2845 NS_E_DRM_INDIV_SERVICE_UNAVAILABLE	The security upgrade cannot be performed because the server is not available. Try again later.
0xC00D2846 NS_E_DRM_RESTORE_SERVICE_UNAVAILABLE	Windows Media Player cannot restore your licenses because the server is not available. Try again later.
0xC00D2847 NS_E_DRM_CLIENT_CODE_EXPIRED	Windows Media Player cannot play the protected file. Verify that your computer's date is set correctly. If it is correct, on the Help menu, click Check for Player Updates to install the latest version of the Player.
0xC00D2848 NS_E_DRM_NO_UPLINK_LICENSE	The chained license cannot be created because the referenced uplink license does not exist.
0xC00D2849 NS_E_DRM_INVALID_KID	The specified KID is invalid.
0xC00D284A NS_E_DRM_LICENSE_INITIALIZATION_ERROR	License initialization did not work. Contact Microsoft product support.
0xC00D284C NS_E_DRM_CHAIN_TOO_LONG	The uplink license of a chained license cannot itself be a chained license.
0xC00D284D NS_E_DRM_UNSUPPORTED_ALGORITHM	The specified encryption algorithm is unsupported.
0xC00D284E NS_E_DRM_LICENSE_DELETION_ERROR	License deletion did not work. Contact Microsoft product support.
0xC00D28A0 NS_E_DRM_INVALID_CERTIFICATE	The client's certificate is corrupted or the signature cannot be verified.

<b>Return value/code</b>	<b>Description</b>
0xC00D28A1 NS_E_DRM_CERTIFICATE_REVOKED	The client's certificate has been revoked.
0xC00D28A2 NS_E_DRM_LICENSE_UNAVAILABLE	There is no license available for the requested action.
0xC00D28A3 NS_E_DRM_DEVICE_LIMIT_REACHED	The maximum number of devices in use has been reached. Unable to open additional devices.
0xC00D28A4 NS_E_DRM_UNABLE_TO_VERIFY_PROXIMITY	The proximity detection procedure could not confirm that the receiver is near the transmitter in the network.
0xC00D28A5 NS_E_DRM_MUST_REGISTER	The client must be registered before executing the intended operation.
0xC00D28A6 NS_E_DRM_MUST_APPROVE	The client must be approved before executing the intended operation.
0xC00D28A7 NS_E_DRM_MUST_REVALIDATE	The client must be revalidated before executing the intended operation.
0xC00D28A8 NS_E_DRM_INVALID_PROXIMITY_RESPONSE	The response to the proximity detection challenge is invalid.
0xC00D28A9 NS_E_DRM_INVALID_SESSION	The requested session is invalid.
0xC00D28AA NS_E_DRM_DEVICE_NOT_OPEN	The device must be opened before it can be used to receive content.
0xC00D28AB NS_E_DRM_DEVICE_ALREADY_REGISTERED	Device registration failed because the device is already registered.
0xC00D28AC NS_E_DRM_UNSUPPORTED_PROTOCOL_VERSION	Unsupported WMDRM-ND protocol version.
0xC00D28AD NS_E_DRM_UNSUPPORTED_ACTION	The requested action is not supported.
0xC00D28AE NS_E_DRM_CERTIFICATE_SECURITY_LEVEL_INADEQUATE	The certificate does not have an adequate security level for the requested action.
0xC00D28AF NS_E_DRM_UNABLE_TO_OPEN_PORT	Unable to open the specified port for receiving Proximity messages.
0xC00D28B0 NS_E_DRM_BAD_REQUEST	The message format is invalid.
0xC00D28B1	The Certificate Revocation List

<b>Return value/code</b>	<b>Description</b>
NS_E_DRM_INVALID_CRL	is invalid or corrupted.
0xC00D28B2 NS_E_DRM_ATTRIBUTE_TOO_LONG	The length of the attribute name or value is too long.
0xC00D28B3 NS_E_DRM_EXPIRED_LICENSEBLOB	The license blob passed in the cardea request is expired.
0xC00D28B4 NS_E_DRM_INVALID_LICENSEBLOB	The license blob passed in the cardea request is invalid. Contact Microsoft product support.
0xC00D28B5 NS_E_DRM_INCLUSION_LIST_REQUIRED	The requested operation cannot be performed because the license does not contain an inclusion list.
0xC00D28B6 NS_E_DRM_DRMV2CLT_REVOKED	A problem has occurred in the Digital Rights Management component. Contact Microsoft product support.
0xC00D28B7 NS_E_DRM_RIV_TOO_SMALL	A problem has occurred in the Digital Rights Management component. Contact Microsoft product support.
0xC00D2904 NS_E_OUTPUT_PROTECTION_LEVEL_UNSUPPORTED	Windows Media Player does not support the level of output protection required by the content.
0xC00D2905 NS_E_COMPRESSED_DIGITAL_VIDEO_PROTECTION_LEVEL_UNSUPPORTED	Windows Media Player does not support the level of protection required for compressed digital video.
0xC00D2906 NS_E_UNCOMPRESSED_DIGITAL_VIDEO_PROTECTION_LEVEL_UNSUPPORTED	Windows Media Player does not support the level of protection required for uncompressed digital video.
0xC00D2907 NS_E_ANALOG_VIDEO_PROTECTION_LEVEL_UNSUPPORTED	Windows Media Player does not support the level of protection required for analog video.
0xC00D2908 NS_E_COMPRESSED_DIGITAL_AUDIO_PROTECTION_LEVEL_UNSUPPORTED	Windows Media Player does not support the level of protection required for compressed digital audio.
0xC00D2909 NS_E_UNCOMPRESSED_DIGITAL_AUDIO_PROTECTION_LEVEL_UNSUPPORTED	Windows Media Player does not support the level of protection required for uncompressed digital audio.
0xC00D290A NS_E_OUTPUT_PROTECTION_SCHEME_UNSUPPORTED	Windows Media Player does not support the scheme of output protection required by the content.

<b>Return value/code</b>	<b>Description</b>
0xC00D2AFA NS_E_REBOOT_RECOMMENDED	Installation was not successful and some file cleanup is not complete. For best results, restart your computer.
0xC00D2AFB NS_E_REBOOT_REQUIRED	Installation was not successful. To continue, you must restart your computer.
0xC00D2AFC NS_E_SETUP_INCOMPLETE	Installation was not successful.
0xC00D2AFD NS_E_SETUP_DRM_MIGRATION_FAILED	Setup cannot migrate the Windows Media Digital Rights Management (DRM) components.
0xC00D2AFE NS_E_SETUP_IGNOREABLE_FAILURE	Some skin or playlist components cannot be installed.
0xC00D2AFF NS_E_SETUP_DRM_MIGRATION_FAILED_AND_IGNOREABLE_FAILURE	Setup cannot migrate the Windows Media Digital Rights Management (DRM) components. In addition, some skin or playlist components cannot be installed.
0xC00D2B00 NS_E_SETUP_BLOCKED	Installation is blocked because your computer does not meet one or more of the setup requirements.
0xC00D2EE0 NS_E_UNKNOWN_PROTOCOL	The specified protocol is not supported.
0xC00D2EE1 NS_E_REDIRECT_TO_PROXY	The client is redirected to a proxy server.
0xC00D2EE2 NS_E_INTERNAL_SERVER_ERROR	The server encountered an unexpected condition which prevented it from fulfilling the request.
0xC00D2EE3 NS_E_BAD_REQUEST	The request could not be understood by the server.
0xC00D2EE4 NS_E_ERROR_FROM_PROXY	The proxy experienced an error while attempting to contact the media server.
0xC00D2EE5 NS_E_PROXY_TIMEOUT	The proxy did not receive a timely response while attempting to contact the media server.
0xC00D2EE6 NS_E_SERVER_UNAVAILABLE	The server is currently unable to handle the request due to a temporary overloading or maintenance of the server.
0xC00D2EE7	The server is refusing to fulfill

<b>Return value/code</b>	<b>Description</b>
NS_E_REFUSED_BY_SERVER	the requested operation.
0xC00D2EE8 NS_E_INCOMPATIBLE_SERVER	The server is not a compatible streaming media server.
0xC00D2EE9 NS_E_MULTICAST_DISABLED	The content cannot be streamed because the Multicast protocol has been disabled.
0xC00D2EEA NS_E_INVALID_REDIRECT	The server redirected the player to an invalid location.
0xC00D2EEB NS_E_ALL_PROTOCOLS_DISABLED	The content cannot be streamed because all protocols have been disabled.
0xC00D2EEC NS_E_MSBD_NO_LONGER_SUPPORTED	The MSBD protocol is no longer supported. Please use HTTP to connect to the Windows Media stream.
0xC00D2EED NS_E_PROXY_NOT_FOUND	The proxy server could not be located. Please check your proxy server configuration.
0xC00D2EEE NS_E_CANNOT_CONNECT_TO_PROXY	Unable to establish a connection to the proxy server. Please check your proxy server configuration.
0xC00D2EEF NS_E_SERVER_DNS_TIMEOUT	Unable to locate the media server. The operation timed out.
0xC00D2EF0 NS_E_PROXY_DNS_TIMEOUT	Unable to locate the proxy server. The operation timed out.
0xC00D2EF1 NS_E_CLOSED_ON_SUSPEND	Media closed because Windows was shut down.
0xC00D2EF2 NS_E_CANNOT_READ_PLAYLIST_FROM_MEDIASERVER	Unable to read the contents of a playlist file from a media server.
0xC00D2EF3 NS_E_SESSION_NOT_FOUND	Session not found.
0xC00D2EF4 NS_E_REQUIRE_STREAMING_CLIENT	Content requires a streaming media client.
0xC00D2EF5 NS_E_PLAYLIST_ENTRY_HAS_CHANGED	A command applies to a previous playlist entry.
0xC00D2EF6 NS_E_PROXY_ACCESSDENIED	The proxy server is denying access. The username and/or password might be incorrect.
0xC00D2EF7 NS_E_PROXY_SOURCE_ACCESSDENIED	The proxy could not provide valid authentication credentials to the media server.

Return value/code	Description
0xC00D2EF8 NS_E_NETWORK_SINK_WRITE	The network sink failed to write data to the network.
0xC00D2EF9 NS_E_FIREWALL	Packets are not being received from the server. The packets might be blocked by a filtering device, such as a network firewall.
0xC00D2EFA NS_E_MMS_NOT_SUPPORTED	The MMS protocol is not supported. Please use HTTP or RTSP to connect to the Windows Media stream.
0xC00D2EFB NS_E_SERVER_ACCESSDENIED	The Windows Media server is denying access. The username and/or password might be incorrect.
0xC00D2EFC NS_E_RESOURCE_GONE	The Publishing Point or file on the Windows Media Server is no longer available.
0xC00D2EFD NS_E_NO_EXISTING_PACKETIZER	There is no existing packetizer plugin for a stream.
0xC00D2EFE NS_E_BAD_SYNTAX_IN_SERVER_RESPONSE	The response from the media server could not be understood. This might be caused by an incompatible proxy server or media server.
0xC00D2F00 NS_E_RESET_SOCKET_CONNECTION	The Windows Media Server reset the network connection.
0xC00D2F02 NS_E_TOO_MANY_HOPS	The request could not reach the media server (too many hops).
0xC00D2F05 NS_E_TOO_MUCH_DATA_FROM_SERVER	The server is sending too much data. The connection has been terminated.
0xC00D2F06 NS_E_CONNECT_TIMEOUT	It was not possible to establish a connection to the media server in a timely manner. The media server <b>may</b> be down for maintenance, or it <b>might</b> be necessary to use a proxy server to access this media server.
0xC00D2F07 NS_E_PROXY_CONNECT_TIMEOUT	It was not possible to establish a connection to the proxy server in a timely manner. Please check your proxy server configuration.
0xC00D2F08 NS_E_SESSION_INVALID	Session not found.
0xC00D2F0A	Unknown packet sink stream.

Return value/code	Description
NS_E_PACKETSINK_UNKNOWN_FEC_STREAM	
0xC00D2F0B NS_E_PUSH_CANNOTCONNECT	Unable to establish a connection to the server. Ensure Windows Media Services is started and the HTTP Server control protocol is properly enabled.
0xC00D2F0C NS_E_INCOMPATIBLE_PUSH_SERVER	The Server service that received the HTTP push request is not a compatible version of Windows Media Services (WMS). This error <b>may</b> indicate the push request was received by IIS instead of WMS. Ensure WMS is started and has the HTTP Server control protocol properly enabled and try again.
0xC00D32C8 NS_E_END_OF_PLAYLIST	The playlist has reached its end.
0xC00D32C9 NS_E_USE_FILE_SOURCE	Use file source.
0xC00D32CA NS_E_PROPERTY_NOT_FOUND	The property was not found.
0xC00D32CC NS_E_PROPERTY_READ_ONLY	The property is read only.
0xC00D32CD NS_E_TABLE_KEY_NOT_FOUND	The table key was not found.
0xC00D32CF NS_E_INVALID_QUERY_OPERATOR	Invalid query operator.
0xC00D32D0 NS_E_INVALID_QUERY_PROPERTY	Invalid query property.
0xC00D32D2 NS_E_PROPERTY_NOT_SUPPORTED	The property is not supported.
0xC00D32D4 NS_E_SCHEMA_CLASSIFY_FAILURE	Schema classification failure.
0xC00D32D5 NS_E_METADATA_FORMAT_NOT_SUPPORTED	The metadata format is not supported.
0xC00D32D6 NS_E_METADATA_NO_EDITING_CAPABILITY	Cannot edit the metadata.
0xC00D32D7 NS_E_METADATA_CANNOT_SET_LOCALE	Cannot set the locale id.
0xC00D32D8 NS_E_METADATA_LANGUAGE_NOT_SUPPORTED	The language is not supported in the format.
0xC00D32D9	There is no RFC1766 name

<b>Return value/code</b>	<b>Description</b>
NS_E_METADATA_NO_RFC1766_NAME_FOR_LOCALE	translation for the supplied locale id.
0xC00D32DA NS_E_METADATA_NOT_AVAILABLE	The metadata (or metadata item) is not available.
0xC00D32DB NS_E_METADATA_CACHE_DATA_NOT_AVAILABLE	The cached metadata (or metadata item) is not available.
0xC00D32DC NS_E_METADATA_INVALID_DOCUMENT_TYPE	The metadata document is invalid.
0xC00D32DD NS_E_METADATA_IDENTIFIER_NOT_AVAILABLE	The metadata content identifier is not available.
0xC00D32DE NS_E_METADATA_CANNOT_RETRIEVE_FROM_OFFLINE_CACHE	Cannot retrieve metadata from the offline metadata cache.
0xC0261003 ERROR_MONITOR_INVALID_DESCRIPTOR_CHECKSUM	Checksum of the obtained monitor descriptor is invalid.
0xC0261004 ERROR_MONITOR_INVALID_STANDARD_TIMING_BLOCK	Monitor descriptor contains an invalid standard timing block.
0xC0261005 ERROR_MONITOR_WMI_DATABLOCK_REGISTRATION_FAILED	Windows Management Instrumentation (WMI) data block registration failed for one of the MSMonitorClass WMI subclasses.
0xC0261006 ERROR_MONITOR_INVALID_SERIAL_NUMBER_MONDSC_BLOCK	Provided monitor descriptor block is either corrupted or does not contain the monitor's detailed serial number.
0xC0261007 ERROR_MONITOR_INVALID_USER_FRIENDLY_MONDSC_BLOCK	Provided monitor descriptor block is either corrupted or does not contain the monitor's user-friendly name.
0xC0261008 ERROR_MONITOR_NO_MORE_DESCRIPTOR_DATA	There is no monitor descriptor data at the specified (offset, size) region.
0xC0261009 ERROR_MONITOR_INVALID_DETAILED_TIMING_BLOCK	Monitor descriptor contains an invalid detailed timing block.
0xC0262000 ERROR_GRAPHICS_NOT_EXCLUSIVE_MODE_OWNER	Exclusive mode ownership is needed to create unmanaged primary allocation.
0xC0262001 ERROR_GRAPHICS_INSUFFICIENT_DMA_BUFFER	The driver needs more direct memory access (DMA) buffer space to complete the requested operation.
0xC0262002 ERROR_GRAPHICS_INVALID_DISPLAY_ADAPTER	Specified display adapter handle is invalid.
0xC0262003	Specified display adapter and all

<b>Return value/code</b>	<b>Description</b>
ERROR_GRAPHICS_ADAPTER_WAS_RESET	of its state has been reset.
0xC0262004 ERROR_GRAPHICS_INVALID_DRIVER_MODEL	The driver stack does not match the expected driver model.
0xC0262005 ERROR_GRAPHICS_PRESENT_MODE_CHANGED	Present happened but ended up into the changed desktop mode.
0xC0262006 ERROR_GRAPHICS_PRESENT_OCCLUDED	Nothing to present due to desktop occlusion.
0xC0262007 ERROR_GRAPHICS_PRESENT_DENIED	Not able to present due to denial of desktop access.
0xC0262008 ERROR_GRAPHICS_CANNOTCOLORCONVERT	Not able to present with color conversion.
0xC0262100 ERROR_GRAPHICS_NO_VIDEO_MEMORY	Not enough video memory available to complete the operation.
0xC0262101 ERROR_GRAPHICS_CANT_LOCK_MEMORY	Could not probe and lock the underlying memory of an allocation.
0xC0262102 ERROR_GRAPHICS_ALLOCATION_BUSY	The allocation is currently busy.
0xC0262103 ERROR_GRAPHICS_TOO_MANY_REFERENCES	An object being referenced has reach the maximum reference count already and cannot be referenced further.
0xC0262104 ERROR_GRAPHICS_TRY_AGAIN_LATER	A problem could not be solved due to some currently existing condition. The problem should be tried again later.
0xC0262105 ERROR_GRAPHICS_TRY_AGAIN_NOW	A problem could not be solved due to some currently existing condition. The problem should be tried again immediately.
0xC0262106 ERROR_GRAPHICS_ALLOCATION_INVALID	The allocation is invalid.
0xC0262107 ERROR_GRAPHICS_UNSWIZZLING_APERTURE_UNAVAILABLE	No more unswizzling apertures are currently available.
0xC0262108 ERROR_GRAPHICS_UNSWIZZLING_APERTURE_UNSUPPORTED	The current allocation cannot be unswizzled by an aperture.
0xC0262109 ERROR_GRAPHICS_CANT_EVICT_PINNED_ALLOCATION	The request failed because a pinned allocation cannot be evicted.
0xC0262110 ERROR_GRAPHICS_INVALID_ALLOCATION_USAGE	The allocation cannot be used from its current segment location for the specified operation.

<b>Return value/code</b>	<b>Description</b>
0xC0262111 ERROR_GRAPHICS_CANT_RENDER_LOCKED_ALLOCATION	A locked allocation cannot be used in the current command buffer.
0xC0262112 ERROR_GRAPHICS_ALLOCATION_CLOSED	The allocation being referenced has been closed permanently.
0xC0262113 ERROR_GRAPHICS_INVALID_ALLOCATION_INSTANCE	An invalid allocation instance is being referenced.
0xC0262114 ERROR_GRAPHICS_INVALID_ALLOCATION_HANDLE	An invalid allocation handle is being referenced.
0xC0262115 ERROR_GRAPHICS_WRONG_ALLOCATION_DEVICE	The allocation being referenced does not belong to the current device.
0xC0262116 ERROR_GRAPHICS_ALLOCATION_CONTENT_LOST	The specified allocation lost its content.
0xC0262200 ERROR_GRAPHICS_GPU_EXCEPTION_ON_DEVICE	Graphics processing unit (GPU) exception is detected on the given device. The device is not able to be scheduled.
0xC0262300 ERROR_GRAPHICS_INVALID_VIDPN_TOPOLOGY	Specified video present network (VidPN) topology is invalid.
0xC0262301 ERROR_GRAPHICS_VIDPN_TOPOLOGY_NOT_SUPPORTED	Specified VidPN topology is valid but is not supported by this model of the display adapter.
0xC0262302 ERROR_GRAPHICS_VIDPN_TOPOLOGY_CURRENTLY_NOT_SUPPORTED	Specified VidPN topology is valid but is not supported by the display adapter at this time, due to current allocation of its resources.
0xC0262303 ERROR_GRAPHICS_INVALID_VIDPN	Specified VidPN handle is invalid.
0xC0262304 ERROR_GRAPHICS_INVALID_VIDEO_PRESENT_SOURCE	Specified video present source is invalid.
0xC0262305 ERROR_GRAPHICS_INVALID_VIDEO_PRESENT_TARGET	Specified video present target is invalid.
0xC0262306 ERROR_GRAPHICS_VIDPN_MODALITY_NOT_SUPPORTED	Specified VidPN modality is not supported (for example, at least two of the pinned modes are not cofunctional).
0xC0262308 ERROR_GRAPHICS_INVALID_VIDPN_SOURCEMODESET	Specified VidPN source mode set is invalid.
0xC0262309 ERROR_GRAPHICS_INVALID_VIDPN_TARGETMODESET	Specified VidPN target mode set is invalid.
0xC026230A	Specified video signal frequency

<b>Return value/code</b>	<b>Description</b>
ERROR_GRAPHICS_INVALID_FREQUENCY	is invalid.
0xC026230B ERROR_GRAPHICS_INVALID_ACTIVE_REGION	Specified video signal active region is invalid.
0xC026230C ERROR_GRAPHICS_INVALID_TOTAL_REGION	Specified video signal total region is invalid.
0xC0262310 ERROR_GRAPHICS_INVALID_VIDEO_PRESENT_SOURCE_MODE	Specified video present source mode is invalid.
0xC0262311 ERROR_GRAPHICS_INVALID_VIDEO_PRESENT_TARGET_MODE	Specified video present target mode is invalid.
0xC0262312 ERROR_GRAPHICS_PINNED_MODE_MUST_REMAIN_IN_SET	Pinned mode must remain in the set on VidPN's cofunctional modality enumeration.
0xC0262313 ERROR_GRAPHICS_PATH_ALREADY_IN_TOPOLOGY	Specified video present path is already in the VidPN topology.
0xC0262314 ERROR_GRAPHICS_MODE_ALREADY_IN_MODESET	Specified mode is already in the mode set.
0xC0262315 ERROR_GRAPHICS_INVALID_VIDEPRESENTSOURCESET	Specified video present source set is invalid.
0xC0262316 ERROR_GRAPHICS_INVALID_VIDEPRESENTTARGETSET	Specified video present target set is invalid.
0xC0262317 ERROR_GRAPHICS_SOURCE_ALREADY_IN_SET	Specified video present source is already in the video present source set.
0xC0262318 ERROR_GRAPHICS_TARGET_ALREADY_IN_SET	Specified video present target is already in the video present target set.
0xC0262319 ERROR_GRAPHICS_INVALID_VIDPN_PRESENT_PATH	Specified VidPN present path is invalid.
0xC026231A ERROR_GRAPHICS_NO_RECOMMENDED_VIDPN_TOPOLOGY	Miniport has no recommendation for augmentation of the specified VidPN topology.
0xC026231B ERROR_GRAPHICS_INVALID_MONITOR_FREQUENCYRANGESSET	Specified monitor frequency range set is invalid.
0xC026231C ERROR_GRAPHICS_INVALID_MONITOR_FREQUENCYRANGE	Specified monitor frequency range is invalid.
0xC026231D ERROR_GRAPHICS_FREQUENCYRANGE_NOT_IN_SET	Specified frequency range is not in the specified monitor frequency range set.
0xC026231F ERROR_GRAPHICS_FREQUENCYRANGE_ALREADY_IN_SET	Specified frequency range is already in the specified monitor frequency range set.

<b>Return value/code</b>	<b>Description</b>
0xC0262320 ERROR_GRAPHICS_STALE_MODESET	Specified mode set is stale. Reacquire the new mode set.
0xC0262321 ERROR_GRAPHICS_INVALID_MONITOR_SOURCEMODESET	Specified monitor source mode set is invalid.
0xC0262322 ERROR_GRAPHICS_INVALID_MONITOR_SOURCE_MODE	Specified monitor source mode is invalid.
0xC0262323 ERROR_GRAPHICS_NO_RECOMMENDED_FUNCTIONAL_VIDPN	Miniport does not have any recommendation regarding the request to provide a functional VidPN given the current display adapter configuration.
0xC0262324 ERROR_GRAPHICS_MODE_ID_MUST_BE_UNIQUE	ID of the specified mode is already used by another mode in the set.
0xC0262325 ERROR_GRAPHICS_EMPTY_ADAPTER_MONITOR_MODE_SUPPORT_INTERSECTION	System failed to determine a mode that is supported by both the display adapter and the monitor connected to it.
0xC0262326 ERROR_GRAPHICS_VIDEO_PRESENT_TARGETS_LESS_THAN_SOURCES	Number of video present targets must be greater than or equal to the number of video present sources.
0xC0262327 ERROR_GRAPHICS_PATH_NOT_IN_TOPOLOGY	Specified present path is not in the VidPN topology.
0xC0262328 ERROR_GRAPHICS_ADAPTER_MUST_HAVE_AT_LEAST_ONE_SOURCE	Display adapter must have at least one video present source.
0xC0262329 ERROR_GRAPHICS_ADAPTER_MUST_HAVE_AT_LEAST_ONE_TARGET	Display adapter must have at least one video present target.
0xC026232A ERROR_GRAPHICS_INVALID_MONITORDESCRIPTORSET	Specified monitor descriptor set is invalid.
0xC026232B ERROR_GRAPHICS_INVALID_MONITORDESCRIPTOR	Specified monitor descriptor is invalid.
0xC026232C ERROR_GRAPHICS_MONITORDESCRIPTOR_NOT_IN_SET	Specified descriptor is not in the specified monitor descriptor set.
0xC026232D ERROR_GRAPHICS_MONITORDESCRIPTOR_ALREADY_IN_SET	Specified descriptor is already in the specified monitor descriptor set.
0xC026232E ERROR_GRAPHICS_MONITORDESCRIPTOR_ID_MUST_BE_UNIQUE	ID of the specified monitor descriptor is already used by another descriptor in the set.
0xC026232F ERROR_GRAPHICS_INVALID_VIDPN_TARGET_SUBSET_TYPE	Specified video present target subset type is invalid.
0xC0262330	Two or more of the specified resources are not related to

<b>Return value/code</b>	<b>Description</b>
ERROR_GRAPHICS_RESOURCES_NOT_RELATED	each other, as defined by the interface semantics.
0xC0262331 ERROR_GRAPHICS_SOURCE_ID_MUST_BE_UNIQUE	ID of the specified video present source is already used by another source in the set.
0xC0262332 ERROR_GRAPHICS_TARGET_ID_MUST_BE_UNIQUE	ID of the specified video present target is already used by another target in the set.
0xC0262333 ERROR_GRAPHICS_NO_AVAILABLE_VIDPN_TARGET	Specified VidPN source cannot be used because there is no available VidPN target to connect it to.
0xC0262334 ERROR_GRAPHICS_MONITOR_COULD_NOT_BE_ASSOCIATED_WITH_ADAPTER	Newly arrived monitor could not be associated with a display adapter.
0xC0262335 ERROR_GRAPHICS_NO_VIDPNMGR	Display adapter in question does not have an associated VidPN manager.
0xC0262336 ERROR_GRAPHICS_NO_ACTIVE_VIDPN	VidPN manager of the display adapter in question does not have an active VidPN.
0xC0262337 ERROR_GRAPHICS_STALE_VIDPN_TOPOLOGY	Specified VidPN topology is stale. Re-acquire the new topology.
0xC0262338 ERROR_GRAPHICS_MONITOR_NOT_CONNECTED	There is no monitor connected on the specified video present target.
0xC0262339 ERROR_GRAPHICS_SOURCE_NOT_IN_TOPOLOGY	Specified source is not part of the specified VidPN topology.
0xC026233A ERROR_GRAPHICS_INVALID_PRIMARYSURFACE_SIZE	Specified primary surface size is invalid.
0xC026233B ERROR_GRAPHICS_INVALID_VISIBLEREGION_SIZE	Specified visible region size is invalid.
0xC026233C ERROR_GRAPHICS_INVALID_STRIDE	Specified stride is invalid.
0xC026233D ERROR_GRAPHICS_INVALID_PIXELFORMAT	Specified pixel format is invalid.
0xC026233E ERROR_GRAPHICS_INVALID_COLORBASIS	Specified color basis is invalid.
0xC026233F ERROR_GRAPHICS_INVALID_PIXELVALUEACCESSMODE	Specified pixel value access mode is invalid.
0xC0262340 ERROR_GRAPHICS_TARGET_NOT_IN_TOPOLOGY	Specified target is not part of the specified VidPN topology.

<b>Return value/code</b>	<b>Description</b>
0xC0262341 ERROR_GRAPHICS_NO_DISPLAY_MODE_MANAGEMENT_SUPPORT	Failed to acquire display mode management interface.
0xC0262342 ERROR_GRAPHICS_VIDPN_SOURCE_IN_USE	Specified VidPN source is already owned by a display mode manager (DMM) client and cannot be used until that client releases it.
0xC0262343 ERROR_GRAPHICS_CANT_ACCESS_ACTIVE_VIDPN	Specified VidPN is active and cannot be accessed.
0xC0262344 ERROR_GRAPHICS_INVALID_PATH_IMPORTANCE_ORDINAL	Specified VidPN present path importance ordinal is invalid.
0xC0262345 ERROR_GRAPHICS_INVALID_PATH_CONTENT_GEOMETRY_TRANSFORMATION	Specified VidPN present path content geometry transformation is invalid.
0xC0262346 ERROR_GRAPHICS_PATH_CONTENT_GEOMETRY_TRANSFORMATION_NOT_SUPPORTED	Specified content geometry transformation is not supported on the respective VidPN present path.
0xC0262347 ERROR_GRAPHICS_INVALID_GAMMA_RAMP	Specified gamma ramp is invalid.
0xC0262348 ERROR_GRAPHICS_GAMMA_RAMP_NOT_SUPPORTED	Specified gamma ramp is not supported on the respective VidPN present path.
0xC0262349 ERROR_GRAPHICS_MULTISAMPLING_NOT_SUPPORTED	Multisampling is not supported on the respective VidPN present path.
0xC026234A ERROR_GRAPHICS_MODE_NOT_IN_MODESET	Specified mode is not in the specified mode set.
0xC026234D ERROR_GRAPHICS_INVALID_VIDPN_TOPOLOGY_RECOMMENDATION_REASON	Specified VidPN topology recommendation reason is invalid.
0xC026234E ERROR_GRAPHICS_INVALID_PATH_CONTENT_TYPE	Specified VidPN present path content type is invalid.
0xC026234F ERROR_GRAPHICS_INVALID_COPYPROTECTION_TYPE	Specified VidPN present path copy protection type is invalid.
0xC0262350 ERROR_GRAPHICS_UNASSIGNED_MODESET_ALREADY_EXISTS	No more than one unassigned mode set can exist at any given time for a given VidPN source or target.
0xC0262352 ERROR_GRAPHICS_INVALID_SCANLINE_ORDERING	The specified scan line ordering type is invalid.
0xC0262353 ERROR_GRAPHICS_TOPOLOGY_CHANGES_NOT_ALLOWED	Topology changes are not allowed for the specified VidPN.
0xC0262354	All available importance ordinals

<b>Return value/code</b>	<b>Description</b>
ERROR_GRAPHICS_NO_AVAILABLE_IMPORTANCE_ORDINALS	are already used in the specified topology.
0xC0262355 ERROR_GRAPHICS_INCOMPATIBLE_PRIVATE_FORMAT	Specified primary surface has a different private format attribute than the current primary surface.
0xC0262356 ERROR_GRAPHICS_INVALID_MODE_PRUNING_ALGORITHM	Specified mode pruning algorithm is invalid.
0xC0262400 ERROR_GRAPHICS_SPECIFIED_CHILD_ALREADY_CONNECTED	Specified display adapter child device already has an external device connected to it.
0xC0262401 ERROR_GRAPHICS_CHILD_DESCRIPTOR_NOT_SUPPORTED	The display adapter child device does not support reporting a descriptor.
0xC0262430 ERROR_GRAPHICS_NOT_A_LINKED_ADAPTER	The display adapter is not linked to any other adapters.
0xC0262431 ERROR_GRAPHICS_LEADLINK_NOT_ENUMERATED	Lead adapter in a linked configuration was not enumerated yet.
0xC0262432 ERROR_GRAPHICS_CHAINLINKS_NOT_ENUMERATED	Some chain adapters in a linked configuration were not enumerated yet.
0xC0262433 ERROR_GRAPHICS_ADAPTER_CHAIN_NOT_READY	The chain of linked adapters is not ready to start because of an unknown failure.
0xC0262434 ERROR_GRAPHICS_CHAINLINKS_NOT_STARTED	An attempt was made to start a lead link display adapter when the chain links were not started yet.
0xC0262435 ERROR_GRAPHICS_CHAINLINKS_NOT_POWERED_ON	An attempt was made to turn on a lead link display adapter when the chain links were turned off.
0xC0262436 ERROR_GRAPHICS_INCONSISTENT_DEVICE_LINK_STATE	The adapter link was found to be in an inconsistent state. Not all adapters are in an expected PNP or power state.
0xC0262438 ERROR_GRAPHICS_NOT_POST_DEVICE_DRIVER	The driver trying to start is not the same as the driver for the posted display adapter.
0xC0262500 ERROR_GRAPHICS_OPM_NOT_SUPPORTED	The driver does not support Output Protection Manager (OPM).
0xC0262501 ERROR_GRAPHICS_COPP_NOT_SUPPORTED	The driver does not support Certified Output Protection Protocol (COPP).
0xC0262502	The driver does not support a

<b>Return value/code</b>	<b>Description</b>
ERROR_GRAPHICS_UAB_NOT_SUPPORTED	user-accessible bus (UAB).
0xC0262503 ERROR_GRAPHICS_OPM_INVALID_ENCRYPTED_PARAMETERS	The specified encrypted parameters are invalid.
0xC0262504 ERROR_GRAPHICS_OPM_PARAMETER_ARRAY_TOO_SMALL	An array passed to a function cannot hold all of the data that the function wants to put in it.
0xC0262505 ERROR_GRAPHICS_OPM_NO_VIDEO_OUTPUTS_EXIST	The GDI display device passed to this function does not have any active video outputs.
0xC0262506 ERROR_GRAPHICS_PVP_NO_DISPLAY_DEVICE_CORRESPONDS_TO_NAME	The protected video path (PVP) cannot find an actual GDI display device that corresponds to the passed-in GDI display device name.
0xC0262507 ERROR_GRAPHICS_PVP_DISPLAY_DEVICE_NOT_ATTACHED_TO_DESKTOP	This function failed because the GDI display device passed to it was not attached to the Windows desktop.
0xC0262508 ERROR_GRAPHICS_PVP_MIRRORING_DEVICES_NOT_SUPPORTED	The PVP does not support mirroring display devices because they do not have video outputs.
0xC026250A ERROR_GRAPHICS_OPM_INVALID_POINTER	The function failed because an invalid pointer parameter was passed to it. A pointer parameter is invalid if it is null, it points to an invalid address, it points to a kernel mode address, or it is not correctly aligned.
0xC026250B ERROR_GRAPHICS_OPM_INTERNAL_ERROR	An internal error caused this operation to fail.
0xC026250C ERROR_GRAPHICS_OPM_INVALID_HANDLE	The function failed because the caller passed in an invalid OPM user mode handle.
0xC026250D ERROR_GRAPHICS_PVP_NO_MONITORS_CORRESPOND_TO_DISPLAY_DEVICE	This function failed because the GDI device passed to it did not have any monitors associated with it.
0xC026250E ERROR_GRAPHICS_PVP_INVALID_CERTIFICATE_LENGTH	A certificate could not be returned because the certificate buffer passed to the function was too small.
0xC026250F ERROR_GRAPHICS_OPM_SPANNING_MODE_ENABLED	A video output could not be created because the frame buffer is in spanning mode.
0xC0262510 ERROR_GRAPHICS_OPM_THEATER_MODE_ENABLED	A video output could not be created because the frame buffer is in theater mode.

Return value/code	Description
0xC0262511 ERROR_GRAPHICS_PVP_HFS_FAILED	The function call failed because the display adapter's hardware functionality scan failed to validate the graphics hardware.
0xC0262512 ERROR_GRAPHICS_OPM_INVALID_SRM	The High-Bandwidth Digital Content Protection (HDCP) System Renewability Message (SRM) passed to this function did not comply with section 5 of the HDCP 1.1 specification.
0xC0262513 ERROR_GRAPHICS_OPM_OUTPUT_DOES_NOT_SUPPORT_HDCP	The video output cannot enable the HDCP system because it does not support it.
0xC0262514 ERROR_GRAPHICS_OPM_OUTPUT_DOES_NOT_SUPPORT_ACP	The video output cannot enable analog copy protection because it does not support it.
0xC0262515 ERROR_GRAPHICS_OPM_OUTPUT_DOES_NOT_SUPPORT_CGMSA	The video output cannot enable the Content Generation Management System Analog (CGMS-A) protection technology because it does not support it.
0xC0262516 ERROR_GRAPHICS_OPM_HDCP_SRM_NEVER_SET	IOPMVideoOutput's GetInformation() method cannot return the version of the SRM being used because the application never successfully passed an SRM to the video output.
0xC0262517 ERROR_GRAPHICS_OPM_RESOLUTION_TOO_HIGH	IOPMVideoOutput's Configure() method cannot enable the specified output protection technology because the output's screen resolution is too high.
0xC0262518 ERROR_GRAPHICS_OPM_ALL_HDCP_HARDWARE_ALREADY_IN_USE	IOPMVideoOutput's Configure() method cannot enable HDCP because the display adapter's HDCP hardware is already being used by other physical outputs.
0xC0262519 ERROR_GRAPHICS_OPM_VIDEO_OUTPUT_NO_LONGER_EXISTS	The operating system asynchronously destroyed this OPM video output because the operating system's state changed. This error typically occurs because the monitor physical device object (PDO) associated with this video output was removed, the monitor PDO associated with this video output was stopped, the video output's session became a nonconsole session or the video output's desktop became an inactive desktop.

Return value/code	Description
0xC026251A ERROR_GRAPHICS_OPM_SESSION_TYPE_CHANGE_IN_PROGRESS	IOPMVideoOutput's methods cannot be called when a session is changing its type. There are currently three types of sessions: console, disconnected and remote (remote desktop protocol [RDP] or Independent Computing Architecture [ICA]).
0xC0262580 ERROR_GRAPHICS_I2C_NOT_SUPPORTED	The monitor connected to the specified video output does not have an I2C bus.
0xC0262581 ERROR_GRAPHICS_I2C_DEVICE_DOES_NOT_EXIST	No device on the I2C bus has the specified address.
0xC0262582 ERROR_GRAPHICS_I2C_ERROR_TRANSMITTING_DATA	An error occurred while transmitting data to the device on the I2C bus.
0xC0262583 ERROR_GRAPHICS_I2C_ERROR_RECEIVING_DATA	An error occurred while receiving data from the device on the I2C bus.
0xC0262584 ERROR_GRAPHICS_DDCCI_VCP_NOT_SUPPORTED	The monitor does not support the specified Virtual Control Panel (VCP) code.
0xC0262585 ERROR_GRAPHICS_DDCCI_INVALID_DATA	The data received from the monitor is invalid.
0xC0262586 ERROR_GRAPHICS_DDCCI_MONITOR_RETURNED_INVALID_TIMING_STATUS_BYTE	A function call failed because a monitor returned an invalid Timing Status byte when the operating system used the Display Data Channel Command Interface (DDC/CI) Get Timing Report and Timing Message command to get a timing report from a monitor.
0xC0262587 ERROR_GRAPHICS_MCA_INVALID_CAPABILITIES_STRING	The monitor returned a DDC/CI capabilities string that did not comply with the ACCESS.bus 3.0, DDC/CI 1.1 or MCCS 2 Revision 1 specification.
0xC0262588 ERROR_GRAPHICS_MCA_INTERNAL_ERROR	An internal Monitor Configuration API error occurred.
0xC0262589 ERROR_GRAPHICS_DDCCI_INVALID_MESSAGE_COMMAND	An operation failed because a DDC/CI message had an invalid value in its command field.
0xC026258A ERROR_GRAPHICS_DDCCI_INVALID_MESSAGE_LENGTH	This error occurred because a DDC/CI message length field contained an invalid value.
0xC026258B ERROR_GRAPHICS_DDCCI_INVALID_MESSAGE_CHECKSUM	This error occurred because the value in a DDC/CI message checksum field did not match

Return value/code	Description
	the message's computed checksum value. This error implies that the data was corrupted while it was being transmitted from a monitor to a computer.
0xC02625D6 ERROR_GRAPHICS_PMEA_INVALID_MONITOR	The HMONITOR no longer exists, is not attached to the desktop, or corresponds to a mirroring device.
0xC02625D7 ERROR_GRAPHICS_PMEA_INVALID_D3D_DEVICE	The Direct3D (D3D) device's GDI display device no longer exists, is not attached to the desktop, or is a mirroring display device.
0xC02625D8 ERROR_GRAPHICS_DDCCI_CURRENT_CURRENT_VALUE_GREATER_THAN_MAXIMUM_VALUE	A continuous VCP code's current value is greater than its maximum value. This error code indicates that a monitor returned an invalid value.
0xC02625D9 ERROR_GRAPHICS_MCA_INVALID_VCP_VERSION	The monitor's VCP Version (0xDF) VCP code returned an invalid version value.
0xC02625DA ERROR_GRAPHICS_MCA_MONITOR_VIOLATES_MCCS_SPECIFICATION	The monitor does not comply with the Monitor Control Command Set (MCCS) specification it claims to support.
0xC02625DB ERROR_GRAPHICS_MCA_MCCS_VERSION_MISMATCH	The MCCS version in a monitor's mcs_ver capability does not match the MCCS version the monitor reports when the VCP Version (0xDF) VCP code is used.
0xC02625DC ERROR_GRAPHICS_MCA_UNSUPPORTED_MCCS_VERSION	The Monitor Configuration API only works with monitors that support the MCCS 1.0 specification, the MCCS 2.0 specification, or the MCCS 2.0 Revision 1 specification.
0xC02625DE ERROR_GRAPHICS_MCA_INVALID_TECHNOLOGY_TYPE_RETURNED	The monitor returned an invalid monitor technology type. CRT, plasma, and LCD (TFT) are examples of monitor technology types. This error implies that the monitor violated the MCCS 2.0 or MCCS 2.0 Revision 1 specification.
0xC02625DF ERROR_GRAPHICS_MCA_UNSUPPORTED_COLOR_TEMPERATURE	The SetMonitorColorTemperature() caller passed a color temperature to it that the current monitor did not support. CRT, plasma, and LCD (TFT) are

Return value/code	Description
	examples of monitor technology types. This error implies that the monitor violated the M CCS 2.0 or M CCS 2.0 Revision 1 specification.
0xC02625E0 ERROR_GRAPHICS_ONLY_CONSOLE_SESSION_SUPPORTED	This function can be used only if a program is running in the local console session. It cannot be used if the program is running on a remote desktop session or on a <b>terminal server</b> session.

## 2.1.2 HRESULT From WIN32 Error Code Macro

The HRESULT From WIN32 Error Code Macro converts a Win32 error code to an HRESULT using the pattern 0x8007XXXX, where XXXX is the first two bytes of the Win32 hex value 0x0000XXXX.

The macro is as follows:

```
#define FACILITY_WIN32 0x0007

#define __HRESULT_FROM_WIN32(x) ((HRESULT)(x) <= 0 ? ((HRESULT)(x)) : ((HRESULT)((x) & 0x0000FFFF) | (FACILITY_WIN32 << 16) | 0x80000000))
```

## 2.2 Win32 Error Codes

All Win32 error codes MUST be in the range 0x0000 to 0xFFFF, although Win32 error codes can be used both in 16-bit fields (such as within the HRESULT type specified in section 2.1) as well as 32-bit fields. Most values also have a default message defined, which can be used to map the value to a human-readable text message; when this is done, the Win32 error code is also known as a message identifier.

~~Vendors SHOULD reuse the values in the~~ The following table ~~with their indicated~~ specifies the values and corresponding meanings. ~~Choosing any of the Win32 error codes. Vendors SHOULD NOT assign other value runs meanings to these values, to avoid~~ the risk of a collision in the future. <3>.

This document provides the common usage details of the Win32 error codes; individual protocol specifications may provide expanded or modified definitions.

**Note** In the following descriptions, a percentage sign followed by one or more alphanumeric characters (for example, "%1" or "%hs") indicates a variable that will be replaced by text at the time the value is returned.

Win32 error codes	Description
0x00000000 ERROR_SUCCESS	The operation completed successfully.
0x00000000 NERR_Success	The operation completed successfully.
0x00000001	Incorrect function.

<b>Win32 error codes</b>	<b>Description</b>
ERROR_INVALID_FUNCTION	
0x00000002 ERROR_FILE_NOT_FOUND	The system cannot find the file specified.
0x00000003 ERROR_PATH_NOT_FOUND	The system cannot find the path specified.
0x00000004 ERROR_TOO_MANY_OPEN_FILES	The system cannot open the file.
0x00000005 ERROR_ACCESS_DENIED	Access is denied.
0x00000006 ERROR_INVALID_HANDLE	The handle is invalid.
0x00000007 ERROR_ARENA_TRASHED	The storage control blocks were destroyed.
0x00000008 ERROR_NOT_ENOUGH_MEMORY	Not enough storage is available to process this command.
0x00000009 ERROR_INVALID_BLOCK	The storage control block address is invalid.
0x0000000A ERROR_BAD_ENVIRONMENT	The environment is incorrect.
0x0000000B ERROR_BAD_FORMAT	An attempt was made to load a program with an incorrect format.
0x0000000C ERROR_INVALID_ACCESS	The access code is invalid.
0x0000000D ERROR_INVALID_DATA	The data is invalid.
0x0000000E ERROR_OUTOFMEMORY	Not enough storage is available to complete this operation.
0x0000000F ERROR_INVALID_DRIVE	The system cannot find the drive specified.
0x00000010 ERROR_CURRENT_DIRECTORY	The directory cannot be removed.
0x00000011 ERROR_NOT_SAME_DEVICE	The system cannot move the file to a different disk drive.
0x00000012 ERROR_NO_MORE_FILES	There are no more files.
0x00000013 ERROR_WRITE_PROTECT	The media is write-protected.
0x00000014	The system cannot find the

<b>Win32 error codes</b>	<b>Description</b>
ERROR_BAD_UNIT	device specified.
0x00000015 ERROR_NOT_READY	The device is not ready.
0x00000016 ERROR_BAD_COMMAND	The device does not recognize the command.
0x00000017 ERROR_CRC	Data error (cyclic redundancy check).
0x00000018 ERROR_BAD_LENGTH	The program issued a command but the command length is incorrect.
0x00000019 ERROR_SEEK	The drive cannot locate a specific area or track on the disk.
0x0000001A ERROR_NOT_DOS_DISK	The specified disk cannot be accessed.
0x0000001B ERROR_SECTOR_NOT_FOUND	The drive cannot find the sector requested.
0x0000001C ERROR_OUT_OF_PAPER	The printer is out of paper.
0x0000001D ERROR_WRITE_FAULT	The system cannot write to the specified device.
0x0000001E ERROR_READ_FAULT	The system cannot read from the specified device.
0x0000001F ERROR_GEN_FAILURE	A device attached to the system is not functioning.
0x00000020 ERROR_SHARING_VIOLATION	The process cannot access the file because it is being used by another process.
0x00000021 ERROR_LOCK_VIOLATION	The process cannot access the file because another process has locked a portion of the file.
0x00000022 ERROR_WRONG_DISK	The wrong disk is in the drive. Insert %2 (Volume Serial Number: %3) into drive %1.
0x00000024 ERROR_SHARING_BUFFER_EXCEEDED	Too many files opened for sharing.
0x00000026 ERROR_HANDLE_EOF	Reached the end of the file.
0x00000027 ERROR_HANDLE_DISK_FULL	The disk is full.
0x00000032 ERROR_NOT_SUPPORTED	The request is not supported.

<b>Win32 error codes</b>	<b>Description</b>
0x00000033 ERROR_REM_NOT_LIST	Windows cannot find the network path. Verify that the network path is correct and the destination computer is not busy or turned off. If Windows still cannot find the network path, contact your network administrator.
0x00000034 ERROR_DUP_NAME	You were not connected because a duplicate name exists on the network. Go to System in Control Panel to change the computer name, and then try again.
0x00000035 ERROR_BAD_NETPATH	The network path was not found.
0x00000036 ERROR_NETWORK_BUSY	The network is busy.
0x00000037 ERROR_DEV_NOT_EXIST	The specified network resource or device is no longer available.
0x00000038 ERROR_TOO_MANY_CMDS	The network BIOS command limit has been reached.
0x00000039 ERROR_ADAP_HDW_ERR	A network adapter hardware error occurred.
0x0000003A ERROR_BAD_NET_RESP	The specified server cannot perform the requested operation.
0x0000003B ERROR_UNEXP_NET_ERR	An unexpected network error occurred.
0x0000003C ERROR_BAD_REM_ADAP	The remote adapter is not compatible.
0x0000003D ERROR_PRINTQ_FULL	The print queue is full.
0x0000003E ERROR_NO_SPOOL_SPACE	Space to store the file waiting to be printed is not available on the server.
0x0000003F ERROR_PRINT_CANCELLED	Your file waiting to be printed was deleted.
0x00000040 ERROR_NETNAME_DELETED	The specified network name is no longer available.
0x00000041 ERROR_NETWORK_ACCESS_DENIED	Network access is denied.
0x00000042 ERROR_BAD_DEV_TYPE	The network resource type is not correct.

<b>Win32 error codes</b>	<b>Description</b>
0x00000043 ERROR_BAD_NET_NAME	The network name cannot be found.
0x00000044 ERROR_TOO_MANY_NAMES	The name limit for the local computer network adapter card was exceeded.
0x00000045 ERROR_TOO_MANY_SESS	The network BIOS session limit was exceeded.
0x00000046 ERROR_SHARING_PAUSED	The remote server has been paused or is in the process of being started.
0x00000047 ERROR_REQ_NOT_ACCEP	No more connections can be made to this remote computer at this time because the computer has accepted the maximum number of connections.
0x00000048 ERROR_REDIR_PAUSED	The specified printer or disk device has been paused.
0x00000050 ERROR_FILE_EXISTS	The file exists.
0x00000052 ERROR_CANNOT_MAKE	The directory or file cannot be created.
0x00000053 ERROR_FAIL_I24	Fail on INT 24.
0x00000054 ERROR_OUT_OF_STRUCTURES	Storage to process this request is not available.
0x00000055 ERROR_ALREADY_ASSIGNED	The local device name is already in use.
0x00000056 ERROR_INVALID_PASSWORD	The specified network password is not correct.
0x00000057 ERROR_INVALID_PARAMETER	The parameter is incorrect.
0x00000058 ERROR_NET_WRITE_FAULT	A write fault occurred on the network.
0x00000059 ERROR_NO_PROC_SLOTS	The system cannot start another process at this time.
0x00000064 ERROR_TOO_MANY_SEMAPHORES	Cannot create another system semaphore.
0x00000065 ERROR_EXCL_SEM_ALREADY_OWNED	The exclusive semaphore is owned by another process.
0x00000066 ERROR_SEM_IS_SET	The semaphore is set and cannot be closed.

<b>Win32 error codes</b>	<b>Description</b>
0x00000067 ERROR_TOO_MANY_SEM_REQUESTS	The semaphore cannot be set again.
0x00000068 ERROR_INVALID_AT_INTERRUPT_TIME	Cannot request exclusive semaphores at interrupt time.
0x00000069 ERROR_SEM_OWNER_DIED	The previous ownership of this semaphore has ended.
0x0000006A ERROR_SEM_USER_LIMIT	Insert the disk for drive %1.
0x0000006B ERROR_DISK_CHANGE	The program stopped because an alternate disk was not inserted.
0x0000006C ERROR_DRIVE_LOCKED	The disk is in use or locked by another process.
0x0000006D ERROR_BROKEN_PIPE	The pipe has been ended.
0x0000006E ERROR_OPEN_FAILED	The system cannot open the device or file specified.
0x0000006F ERROR_BUFFER_OVERFLOW	The file name is too long.
0x00000070 ERROR_DISK_FULL	There is not enough space on the disk.
0x00000071 ERROR_NO_MORE_SEARCH_HANDLES	No more internal file identifiers are available.
0x00000072 ERROR_INVALID_TARGET_HANDLE	The target internal file identifier is incorrect.
0x00000075 ERROR_INVALID_CATEGORY	The Input Output Control (IOCTL) call made by the application program is not correct.
0x00000076 ERROR_INVALID_VERIFY_SWITCH	The verify-on-write switch parameter value is not correct.
0x00000077 ERROR_BAD_DRIVER_LEVEL	The system does not support the command requested.
0x00000078 ERROR_CALL_NOT_IMPLEMENTED	This function is not supported on this system.
0x00000079 ERROR_SEM_TIMEOUT	The semaphore time-out period has expired.
0x0000007A ERROR_INSUFFICIENT_BUFFER	The data area passed to a system call is too small.
0x0000007B	The file name, directory name,

Win32 error codes	Description
ERROR_INVALID_NAME	or volume label syntax is incorrect.
0x0000007C ERROR_INVALID_LEVEL	The system call level is not correct.
0x0000007D ERROR_NO_VOLUME_LABEL	The disk has no volume label.
0x0000007E ERROR_MOD_NOT_FOUND	The specified module could not be found.
0x0000007F ERROR_PROC_NOT_FOUND	The specified procedure could not be found.
0x00000080 ERROR_WAIT_NO_CHILDREN	There are no child processes to wait for.
0x00000081 ERROR_CHILD_NOT_COMPLETE	The %1 application cannot be run in Win32 mode.
0x00000082 ERROR_DIRECT_ACCESS_HANDLE	Attempt to use a file handle to an open disk partition for an operation other than raw disk I/O.
0x00000083 ERROR_NEGATIVE_SEEK	An attempt was made to move the file pointer before the beginning of the file.
0x00000084 ERROR_SEEK_ON_DEVICE	The file pointer cannot be set on the specified device or file.
0x00000085 ERROR_IS_JOIN_TARGET	A <b>JOIN</b> or <b>SUBST</b> command cannot be used for a drive that contains previously joined drives.
0x00000086 ERROR_IS_JOINED	An attempt was made to use a <b>JOIN</b> or <b>SUBST</b> command on a drive that has already been joined.
0x00000087 ERROR_IS_SUBSTED	An attempt was made to use a <b>JOIN</b> or <b>SUBST</b> command on a drive that has already been substituted.
0x00000088 ERROR_NOT_JOINED	The system tried to delete the <b>JOIN</b> of a drive that is not joined.
0x00000089 ERROR_NOT_SUBSTED	The system tried to delete the substitution of a drive that is not substituted.
0x0000008A ERROR_JOIN_TO_JOIN	The system tried to join a drive to a directory on a joined drive.
0x0000008B	The system tried to substitute a drive to a directory on a

<b>Win32 error codes</b>	<b>Description</b>
ERROR_SUBST_TO_SUBST	substituted drive.
0x0000008C ERROR_JOIN_TO_SUBST	The system tried to join a drive to a directory on a substituted drive.
0x0000008D ERROR_SUBST_TO_JOIN	The system tried to <b>SUBST</b> a drive to a directory on a joined drive.
0x0000008E ERROR_BUSY_DRIVE	The system cannot perform a <b>JOIN</b> or <b>SUBST</b> at this time.
0x0000008F ERROR_SAME_DRIVE	The system cannot join or substitute a drive to or for a directory on the same drive.
0x00000090 ERROR_DIR_NOT_ROOT	The directory is not a subdirectory of the root directory.
0x00000091 ERROR_DIR_NOT_EMPTY	The directory is not empty.
0x00000092 ERROR_IS_SUBST_PATH	The path specified is being used in a substitute.
0x00000093 ERROR_IS_JOIN_PATH	Not enough resources are available to process this command.
0x00000094 ERROR_PATH_BUSY	The path specified cannot be used at this time.
0x00000095 ERROR_IS_SUBST_TARGET	An attempt was made to join or substitute a drive for which a directory on the drive is the target of a previous substitute.
0x00000096 ERROR_SYSTEM_TRACE	System trace information was not specified in your CONFIG.SYS file, or tracing is disallowed.
0x00000097 ERROR_INVALID_EVENT_COUNT	The number of specified semaphore events for DosMuxSemWait is not correct.
0x00000098 ERROR_TOO_MANY_MUXWAITERS	DosMuxSemWait did not execute; too many semaphores are already set.
0x00000099 ERROR_INVALID_LIST_FORMAT	The DosMuxSemWait list is not correct.
0x0000009A ERROR_LABEL_TOO_LONG	The volume label you entered exceeds the label character limit of the destination file system.
0x0000009B ERROR_TOO_MANY_TCBS	Cannot create another thread.

<b>Win32 error codes</b>	<b>Description</b>
0x0000009C ERROR_SIGNAL_REFUSED	The recipient process has refused the signal.
0x0000009D ERROR_DISCARDED	The segment is already discarded and cannot be locked.
0x0000009E ERROR_NOT_LOCKED	The segment is already unlocked.
0x0000009F ERROR_BAD_THREADID_ADDR	The address for the thread ID is not correct.
0x000000A0 ERROR_BAD_ARGUMENTS	One or more arguments are not correct.
0x000000A1 ERROR_BAD_PATHNAME	The specified path is invalid.
0x000000A2 ERROR_SIGNAL_PENDING	A signal is already pending.
0x000000A4 ERROR_MAX_THRDS_REACHED	No more threads can be created in the system.
0x000000A7 ERROR_LOCK_FAILED	Unable to lock a region of a file.
0x000000AA ERROR_BUSY	The requested resource is in use.
0x000000AD ERROR_CANCEL_VIOLATION	A lock request was not outstanding for the supplied cancel region.
0x000000AE ERROR_ATOMIC_LOCKS_NOT_SUPPORTED	The file system does not support atomic changes to the lock type.
0x000000B4 ERROR_INVALID_SEGMENT_NUMBER	The system detected a segment number that was not correct.
0x000000B6 ERROR_INVALID_ORDINAL	The operating system cannot run %1.
0x000000B7 ERROR_ALREADY_EXISTS	Cannot create a file when that file already exists.
0x000000BA ERROR_INVALID_FLAG_NUMBER	The flag passed is not correct.
0x000000BB ERROR_SEM_NOT_FOUND	The specified system semaphore name was not found.
0x000000BC ERROR_INVALID_STARTING_CODESEG	The operating system cannot run %1.
0x000000BD ERROR_INVALID_STACKSEG	The operating system cannot run %1.

<b>Win32 error codes</b>	<b>Description</b>
0x000000BE ERROR_INVALID_MODULETYPE	The operating system cannot run %1.
0x000000BF ERROR_INVALID_EXE_SIGNATURE	Cannot run %1 in Win32 mode.
0x000000C0 ERROR_EXE_MARKED_INVALID	The operating system cannot run %1.
0x000000C1 ERROR_BAD_EXE_FORMAT	%1 is not a valid Win32 application.
0x000000C2 ERROR_ITERATED_DATA_EXCEEDS_64k	The operating system cannot run %1.
0x000000C3 ERROR_INVALID_MINALLOCSIZE	The operating system cannot run %1.
0x000000C4 ERROR_DYNLINK_FROM_INVALID_RING	The operating system cannot run this application program.
0x000000C5 ERROR_IOPL_NOT_ENABLED	The operating system is not presently configured to run this application.
0x000000C6 ERROR_INVALID_SEGDPL	The operating system cannot run %1.
0x000000C7 ERROR_AUTODATASEG_EXCEEDS_64k	The operating system cannot run this application program.
0x000000C8 ERROR_RING2SEG_MUST_BE_MOVABLE	The code segment cannot be greater than or equal to 64 KB.
0x000000C9 ERROR_RELOC_CHAIN_XEEDS_SEGLIM	The operating system cannot run %1.
0x000000CA ERROR_INFLOOP_IN_RELOC_CHAIN	The operating system cannot run %1.
0x000000CB ERROR_ENVVAR_NOT_FOUND	The system could not find the environment option that was entered.
0x000000CD ERROR_NO_SIGNAL_SENT	No process in the command subtree has a signal handler.
0x000000CE ERROR_FILENAME_EXCED_RANGE	The file name or extension is too long.
0x000000CF ERROR_RING2_STACK_IN_USE	The ring 2 stack is in use.
0x000000D0 ERROR_META_EXPANSION_TOO_LONG	The asterisk (*) or question mark (?) global file name characters are entered incorrectly, or too many global file name characters are

Win32 error codes	Description
	specified.
0x000000D1 ERROR_INVALID_SIGNAL_NUMBER	The signal being posted is not correct.
0x000000D2 ERROR_THREAD_1_INACTIVE	The signal handler cannot be set.
0x000000D4 ERROR_LOCKED	The segment is locked and cannot be reallocated.
0x000000D6 ERROR_TOO_MANY_MODULES	Too many dynamic-link modules are attached to this program or dynamic-link module.
0x000000D7 ERROR_NESTING_NOT_ALLOWED	Cannot nest calls to LoadModule.
0x000000D8 ERROR_EXE_MACHINE_TYPE_MISMATCH	This version of %1 is not compatible with the version of Windows you're running. Check your computer's system information to see whether you need an x86 (32-bit) or x64 (64-bit) version of the program, and then contact the software publisher.
0x000000D9 ERROR_EXE_CANNOT_MODIFY_SIGNED_BINARY	The image file %1 is signed, unable to modify.
0x000000DA ERROR_EXE_CANNOT_MODIFY_STRONG_SIGNED_BINARY	The image file %1 is strong signed, unable to modify.
0x000000DC ERROR_FILE_CHECKED_OUT	This file is checked out or locked for editing by another user.
0x000000DD ERROR_CHECKOUT_REQUIRED	The file must be checked out before saving changes.
0x000000DE ERROR_BAD_FILE_TYPE	The file type being saved or retrieved has been blocked.
0x000000DF ERROR_FILE_TOO_LARGE	The file size exceeds the limit allowed and cannot be saved.
0x000000E0 ERROR_FORMS_AUTH_REQUIRED	Access denied. Before opening files in this location, you must first browse to the website and select the option to sign in automatically.
0x000000E1 ERROR_VIRUS_INFECTED	Operation did not complete successfully because the file contains a virus.
0x000000E2 ERROR_VIRUS_DELETED	This file contains a virus and cannot be opened. Due to the nature of this virus, the file has been removed from this location.

<b>Win32 error codes</b>	<b>Description</b>
0x000000E5 ERROR_PIPE_LOCAL	The pipe is local.
0x000000E6 ERROR_BAD_PIPE	The pipe state is invalid.
0x000000E7 ERROR_PIPE_BUSY	All pipe instances are busy.
0x000000E8 ERROR_NO_DATA	The pipe is being closed.
0x000000E9 ERROR_PIPE_NOT_CONNECTED	No process is on the other end of the pipe.
0x000000EA ERROR_MORE_DATA	More data is available.
0x000000F0 ERROR_VC_DISCONNECTED	The session was canceled.
0x000000FE ERROR_INVALID_EA_NAME	The specified extended attribute name was invalid.
0x000000FF ERROR_EA_LIST_INCONSISTENT	The extended attributes are inconsistent.
0x00000102 WAIT_TIMEOUT	The wait operation timed out.
0x00000103 ERROR_NO_MORE_ITEMS	No more data is available.
0x0000010A ERROR_CANNOT_COPY	The copy functions cannot be used.
0x0000010B ERROR_DIRECTORY	The directory name is invalid.
0x00000113 ERROR_EAS_DIDNT_FIT	The extended attributes did not fit in the buffer.
0x00000114 ERROR_EA_FILE_CORRUPT	The extended attribute file on the mounted file system is corrupt.
0x00000115 ERROR_EA_TABLE_FULL	The extended attribute table file is full.
0x00000116 ERROR_INVALID_EA_HANDLE	The specified extended attribute handle is invalid.
0x0000011A ERROR_EAS_NOT_SUPPORTED	The mounted file system does not support extended attributes.
0x00000120 ERROR_NOT_OWNER	Attempt to release mutex not owned by caller.

<b>Win32 error codes</b>	<b>Description</b>
0x0000012A ERROR_TOO_MANY_POSTS	Too many posts were made to a semaphore.
0x0000012B ERROR_PARTIAL_COPY	Only part of a ReadProcessMemory or WriteProcessMemory request was completed.
0x0000012C ERROR_OPLOCK_NOT_GRANTED	The oplock request is denied.
0x0000012D ERROR_INVALID_OPLOCK_PROTOCOL	An invalid oplock acknowledgment was received by the system.
0x0000012E ERROR_DISK_TOO_FRAGMENTED	The volume is too fragmented to complete this operation.
0x0000012F ERROR_DELETE_PENDING	The file cannot be opened because it is in the process of being deleted.
0x0000013D ERROR_MR_MID_NOT_FOUND	The system cannot find message text for message number 0x%1 in the message file for %2.
0x0000013E ERROR_SCOPE_NOT_FOUND	The scope specified was not found.
0x0000015E ERROR_FAIL_NOACTION_REBOOT	No action was taken because a system reboot is required.
0x0000015F ERROR_FAIL_SHUTDOWN	The shutdown operation failed.
0x00000160 ERROR_FAIL_RESTART	The restart operation failed.
0x00000161 ERROR_MAX_SESSIONS_REACHED	The maximum number of sessions has been reached.
0x00000190 ERROR_THREAD_MODE_ALREADY_BACKGROUND	The thread is already in background processing mode.
0x00000191 ERROR_THREAD_MODE_NOT_BACKGROUND	The thread is not in background processing mode.
0x00000192 ERROR_PROCESS_MODE_ALREADY_BACKGROUND	The process is already in background processing mode.
0x00000193 ERROR_PROCESS_MODE_NOT_BACKGROUND	The process is not in background processing mode.
0x000001E7 ERROR_INVALID_ADDRESS	Attempt to access invalid address.
0x000001F4 ERROR_USER_PROFILE_LOAD	User profile cannot be loaded.

<b>Win32 error codes</b>	<b>Description</b>
0x00000216 ERROR_ARITHMETIC_OVERFLOW	Arithmetic result exceeded 32 bits.
0x00000217 ERROR_PIPE_CONNECTED	There is a process on the other end of the pipe.
0x00000218 ERROR_PIPE_LISTENING	Waiting for a process to open the other end of the pipe.
0x00000219 ERROR_VERIFIER_STOP	Application verifier has found an error in the current process.
0x0000021A ERROR_ABIOS_ERROR	An error occurred in the ABIOS subsystem.
0x0000021B ERROR_WX86_WARNING	A warning occurred in the WX86 subsystem.
0x0000021C ERROR_WX86_ERROR	An error occurred in the WX86 subsystem.
0x0000021D ERROR_TIMER_NOT_CANCELED	An attempt was made to cancel or set a timer that has an associated asynchronous procedure call (APC) and the subject thread is not the thread that originally set the timer with an associated APC routine.
0x0000021E ERROR_UNWIND	Unwind exception code.
0x0000021F ERROR_BAD_STACK	An invalid or unaligned stack was encountered during an unwind operation.
0x00000220 ERROR_INVALID_UNWIND_TARGET	An invalid unwind target was encountered during an unwind operation.
0x00000221 ERROR_INVALID_PORT_ATTRIBUTES	Invalid object attributes specified to NtCreatePort or invalid port attributes specified to NtConnectPort.
0x00000222 ERROR_PORT_MESSAGE_TOO_LONG	Length of message passed to NtRequestPort or NtRequestWaitReplyPort was longer than the maximum message allowed by the port.
0x00000223 ERROR_INVALID_QUOTA_LOWER	An attempt was made to lower a quota limit below the current usage.
0x00000224 ERROR_DEVICE_ALREADY_ATTACHED	An attempt was made to attach to a device that was already attached to another device.
0x00000225	An attempt was made to execute

Win32 error codes	Description
ERROR_INSTRUCTION_MISALIGNMENT	an instruction at an unaligned address, and the host system does not support unaligned instruction references.
0x00000226 ERROR_PROFILING_NOT_STARTED	Profiling not started.
0x00000227 ERROR_PROFILING_NOT_STOPPED	Profiling not stopped.
0x00000228 ERROR_COULD_NOT_INTERPRET	The passed ACL did not contain the minimum required information.
0x00000229 ERROR_PROFILING_AT_LIMIT	The number of active profiling objects is at the maximum and no more <b>mayCan</b> be started.
0x0000022A ERROR_CANT_WAIT	Used to indicate that an operation cannot continue without blocking for I/O.
0x0000022B ERROR_CANT_TERMINATE_SELF	Indicates that a thread attempted to terminate itself by default (called NtTerminateThread with NULL) and it was the last thread in the current process.
0x0000022C ERROR_UNEXPECTED_MM_CREATE_ERR	If an MM error is returned that is not defined in the standard FsRtl filter, it is converted to one of the following errors that is guaranteed to be in the filter. In this case, information is lost; however, the filter correctly handles the exception.
0x0000022D ERROR_UNEXPECTED_MM_MAP_ERROR	If an MM error is returned that is not defined in the standard FsRtl filter, it is converted to one of the following errors that is guaranteed to be in the filter. In this case, information is lost; however, the filter correctly handles the exception.
0x0000022E ERROR_UNEXPECTED_MM_EXTEND_ERR	If an MM error is returned that is not defined in the standard FsRtl filter, it is converted to one of the following errors that is guaranteed to be in the filter. In this case, information is lost; however, the filter correctly handles the exception.
0x0000022F ERROR_BAD_FUNCTION_TABLE	A malformed function table was encountered during an unwind operation.
0x00000230	Indicates that an attempt was

Win32 error codes	Description
ERROR_NO_GUID_TRANSLATION	made to assign protection to a file system file or directory and one of the SIDs in the security descriptor could not be translated into a GUID that could be stored by the file system. This causes the protection attempt to fail, which <b>may</b> cause a file creation attempt to fail.
0x00000231 ERROR_INVALID_LDT_SIZE	Indicates that an attempt was made to grow a local domain table (LDT) by setting its size, or that the size was not an even number of selectors.
0x00000233 ERROR_INVALID_LDT_OFFSET	Indicates that the starting value for the LDT information was not an integral multiple of the selector size.
0x00000234 ERROR_INVALID_LDT_DESCRIPTOR	Indicates that the user supplied an invalid descriptor when trying to set up LDT descriptors.
0x00000235 ERROR_TOO_MANY_THREADS	Indicates a process has too many threads to perform the requested action. For example, assignment of a primary token <b>may only</b> be performed <b>only</b> when a process has zero or one threads.
0x00000236 ERROR_THREAD_NOT_IN_PROCESS	An attempt was made to operate on a thread within a specific process, but the thread specified is not in the process specified.
0x00000237 ERROR_PAGEFILE_QUOTA_EXCEEDED	Page file quota was exceeded.
0x00000238 ERROR_LOGON_SERVER_CONFLICT	The Netlogon service cannot start because another Netlogon service running in the domain conflicts with the specified role.
0x00000239 ERROR_SYNCHRONIZATION_REQUIRED	The Security Accounts Manager (SAM) database on a Windows Server operating system is significantly out of synchronization with the copy on the domain controller. A complete synchronization is required.
0x0000023A ERROR_NET_OPEN_FAILED	The NtCreateFile API failed. This error should never be returned to an application, it is a place holder for the Windows LAN Manager Redirector to use in its internal error mapping routines.

<b>Win32 error codes</b>	<b>Description</b>
0x0000023B ERROR_IO_PRIVILEGE_FAILED	{Privilege Failed} The I/O permissions for the process could not be changed.
0x0000023C ERROR_CONTROL_C_EXIT	{Application Exit by CTRL+C} The application terminated as a result of a CTRL+C.
0x0000023D ERROR_MISSING_SYSTEMFILE	{Missing System File} The required system file %hs is bad or missing.
0x0000023E ERROR_UNHANDLED_EXCEPTION	{Application Error} The exception %s (0x%08lx) occurred in the application at location 0x%08lx.
0x0000023F ERROR_APP_INIT_FAILURE	{Application Error} The application failed to initialize properly (0x%lx). Click OK to terminate the application.
0x00000240 ERROR_PAGEFILE_CREATE_FAILED	{Unable to Create Paging File} The creation of the paging file %hs failed (%lx). The requested size was %ld.
0x00000241 ERROR_INVALID_IMAGE_HASH	The hash for the image cannot be found in the system catalogs. The image is likely corrupt or the victim of tampering.
0x00000242 ERROR_NO_PAGEFILE	{No Paging File Specified} No paging file was specified in the system configuration.
0x00000243 ERROR_ILLEGAL_FLOAT_CONTEXT	{EXCEPTION} A real-mode application issued a floating-point instruction, and floating-point hardware is not present.
0x00000244 ERROR_NO_EVENT_PAIR	An event pair synchronization operation was performed using the thread-specific client/server event pair object, but no event pair object was associated with the thread.
0x00000245 ERROR_DOMAIN_CTRLR_CONFIG_ERROR	A Windows Server has an incorrect configuration.
0x00000246 ERROR_ILLEGAL_CHARACTER	An illegal character was encountered. For a multibyte character set, this includes a lead byte without a succeeding trail byte. For the Unicode character set, this includes the characters 0xFFFF and 0xFFFE.
0x00000247 ERROR_UNDEFINED_CHARACTER	The Unicode character is not defined in the Unicode character set installed on the system.

Win32 error codes	Description
0x00000248 ERROR_FLOPPY_VOLUME	The paging file cannot be created on a floppy disk.
0x00000249 ERROR_BIOS_FAILED_TO_CONNECT_INTERRUPT	The system bios failed to connect a system interrupt to the device or bus for which the device is connected.
0x0000024A ERROR_BACKUP_CONTROLLER	This operation is only allowed for the primary domain controller (PDC) of the domain.
0x0000024B ERROR_MUTANT_LIMIT_EXCEEDED	An attempt was made to acquire a mutant such that its maximum count would have been exceeded.
0x0000024C ERROR_FS_DRIVER_REQUIRED	A volume has been accessed for which a file system driver is required that has not yet been loaded.
0x0000024D ERROR_CANNOT_LOAD_REGISTRY_FILE	{Registry File Failure} The registry cannot load the hive (file): %hs or its log or alternate. It is corrupt, absent, or not writable.
0x0000024E ERROR_DEBUG_ATTACH_FAILED	{Unexpected Failure in DebugActiveProcess} An unexpected failure occurred while processing a DebugActiveProcess API request. <del>You may choose</del> <b>Choosing</b> OK <del>to</del> <b>will</b> terminate the process, <del>and choosing</del> <b>Cancel</b> <del>to</del> <b>will</b> ignore the error.
0x0000024F ERROR_SYSTEM_PROCESS_TERMINATED	{Fatal System Error} The %hs system process terminated unexpectedly with a status of 0x%08x (0x%08x 0x%08x). The system has been shut down.
0x00000250 ERROR_DATA_NOT_ACCEPTED	{Data Not Accepted} The transport driver interface (TDI) client could not handle the data received during an indication.
0x00000251 ERROR_VDM_HARD_ERROR	The NT Virtual DOS Machine (NTVDM) encountered a hard error.
0x00000252 ERROR_DRIVER_CANCEL_TIMEOUT	{Cancel Timeout} The driver %hs failed to complete a canceled I/O request in the allotted time.
0x00000253 ERROR_REPLY_MESSAGE_MISMATCH	{Reply Message Mismatch} An attempt was made to reply to a local procedure call (LPC) message, but the thread

Win32 error codes	Description
	specified by the client ID in the message was not waiting on that message.
0x00000254 ERROR_LOST_WRITEBEHIND_DATA	{Delayed Write Failed} Windows was unable to save all the data for the file %hs. The data has been lost. This error <b>may</b> be caused by a failure of your computer hardware or network connection. Try to save this file elsewhere.
0x00000255 ERROR_CLIENT_SERVER_PARAMETERS_INVALID	The parameters passed to the server in the client/server shared memory window were invalid. Too much data <b>may</b> have been put in the shared memory window.
0x00000256 ERROR_NOT_TINY_STREAM	The stream is not a tiny stream.
0x00000257 ERROR_STACK_OVERFLOW_READ	The request must be handled by the stack overflow code.
0x00000258 ERROR_CONVERT_TO_LARGE	Internal OFS status codes indicating how an allocation operation is handled. Either it is retried after the containing onode is moved or the extent stream is converted to a large stream.
0x00000259 ERROR_FOUND_OUT_OF_SCOPE	The attempt to find the object found an object matching by ID on the volume but it is out of the scope of the handle used for the operation.
0x0000025A ERROR_ALLOCATE_BUCKET	The bucket array must be grown. Retry transaction after doing so.
0x0000025B ERROR_MARSHALL_OVERFLOW	The user/kernel marshaling buffer has overflowed.
0x0000025C ERROR_INVALID_VARIANT	The supplied variant structure contains invalid data.
0x0000025D ERROR_BAD_COMPRESSION_BUFFER	The specified buffer contains ill-formed data.
0x0000025E ERROR_AUDIT_FAILED	{Audit Failed} An attempt to generate a security audit failed.
0x0000025F ERROR_TIMER_RESOLUTION_NOT_SET	The timer resolution was not previously set by the current process.
0x00000260	There is insufficient account information to log you on.

Win32 error codes	Description
ERROR_INSUFFICIENT_LOGON_INFO	
0x00000261 ERROR_BAD_DLL_ENTRYPOINT	{Invalid DLL Entrypoint} The dynamic link library %hs is not written correctly. The stack pointer has been left in an inconsistent state. The entry point should be declared as WINAPI or STDCALL. Select YES to fail the DLL load. Select NO to continue execution. Selecting NO <b>maycan</b> cause the application to operate incorrectly.
0x00000262 ERROR_BAD_SERVICE_ENTRYPOINT	{Invalid Service Callback Entrypoint} The %hs service is not written correctly. The stack pointer has been left in an inconsistent state. The callback entry point should be declared as WINAPI or STDCALL. Selecting OK will cause the service to continue operation. However, the service process <b>maymight</b> operate incorrectly.
0x00000263 ERROR_IP_ADDRESS_CONFLICT1	There is an IP address conflict with another system on the network.
0x00000264 ERROR_IP_ADDRESS_CONFLICT2	There is an IP address conflict with another system on the network.
0x00000265 ERROR_REGISTRY_QUOTA_LIMIT	{Low On Registry Space} The system has reached the maximum size allowed for the system part of the registry. Additional storage requests will be ignored.
0x00000266 ERROR_NO_CALLBACK_ACTIVE	A callback return system service cannot be executed when no callback is active.
0x00000267 ERROR_PWD_TOO_SHORT	The password provided is too short to meet the policy of your user account. Choose a longer password.
0x00000268 ERROR_PWD_TOO_RECENT	The policy of your user account does not allow you to change passwords too frequently. This is done to prevent users from changing back to a familiar, but potentially discovered, password. If you feel your password has been compromised, contact your administrator immediately to have a new one assigned.
0x00000269	You have attempted to change your password to one that you

<b>Win32 error codes</b>	<b>Description</b>
ERROR_PWD_HISTORY_CONFLICT	have used in the past. The policy of your user account does not allow this. Select a password that you have not previously used.
0x0000026A ERROR_UNSUPPORTED_COMPRESSION	The specified compression format is unsupported.
0x0000026B ERROR_INVALID_HW_PROFILE	The specified hardware profile configuration is invalid.
0x0000026C ERROR_INVALID_PLUGPLAY_DEVICE_PATH	The specified Plug and Play registry device path is invalid.
0x0000026D ERROR_QUOTA_LIST_INCONSISTENT	The specified quota list is internally inconsistent with its descriptor.
0x0000026E ERROR_EVALUATION_EXPIRATION	{Windows Evaluation Notification} The evaluation period for this installation of Windows has expired. This system will shut down in 1 hour. To restore access to this installation of Windows, upgrade this installation using a licensed distribution of this product.
0x0000026F ERROR_ILLEGAL_DLL_RELOCATION	{Illegal System DLL Relocation} The system DLL %hs was relocated in memory. The application will not run properly. The relocation occurred because the DLL %hs occupied an address range reserved for Windows system DLLs. The vendor supplying the DLL should be contacted for a new DLL.
0x00000270 ERROR_DLL_INIT_FAILED_LOGOFF	{DLL Initialization Failed} The application failed to initialize because the window station is shutting down.
0x00000271 ERROR_VALIDATE_CONTINUE	The validation process needs to continue on to the next step.
0x00000272 ERROR_NO_MORE_MATCHES	There are no more matches for the current index enumeration.
0x00000273 ERROR_RANGE_LIST_CONFLICT	The range could not be added to the range list because of a conflict.
0x00000274 ERROR_SERVER_SID_MISMATCH	The server process is running under a SID different than that required by the client.
0x00000275 ERROR_CANT_ENABLE_DENY_ONLY	A group marked use for deny only cannot be enabled.

<b>Win32 error codes</b>	<b>Description</b>
0x00000276 ERROR_FLOAT_MULTIPLE_FAULTS	{EXCEPTION} Multiple floating point faults.
0x00000277 ERROR_FLOAT_MULTIPLE_TRAPS	{EXCEPTION} Multiple floating point traps.
0x00000278 ERROR_NOINTERFACE	The requested interface is not supported.
0x00000279 ERROR_DRIVER_FAILED_SLEEP	{System Standby Failed} The driver %hs does not support standby mode. Updating this driver <b>may</b> allow the system to go to standby mode.
0x0000027A ERROR_CORRUPT_SYSTEM_FILE	The system file %1 has become corrupt and has been replaced.
0x0000027B ERROR_COMMITMENT_MINIMUM	{Virtual Memory Minimum Too Low} Your system is low on virtual memory. Windows is increasing the size of your virtual memory paging file. During this process, memory requests for some applications <b>may</b> be denied. For more information, see Help.
0x0000027C ERROR_PNP_RESTART_ENUMERATION	A device was removed so enumeration must be restarted.
0x0000027D ERROR_SYSTEM_IMAGE_BAD_SIGNATURE	{Fatal System Error} The system image %s is not properly signed. The file has been replaced with the signed file. The system has been shut down.
0x0000027E ERROR_PNP_REBOOT_REQUIRED	Device will not start without a reboot.
0x0000027F ERROR_INSUFFICIENT_POWER	There is not enough power to complete the requested operation.
0x00000281 ERROR_SYSTEM_SHUTDOWN	The system is in the process of shutting down.
0x00000282 ERROR_PORT_NOT_SET	An attempt to remove a process DebugPort was made, but a port was not already associated with the process.
0x00000283 ERROR_DS_VERSION_CHECK_FAILURE	This version of Windows is not compatible with the behavior version of directory forest, domain, or domain controller.
0x00000284 ERROR_RANGE_NOT_FOUND	The specified range could not be found in the range list.

Win32 error codes	Description
0x00000286 ERROR_NOT_SAFE_MODE_DRIVER	The driver was not loaded because the system is booting into safe mode.
0x00000287 ERROR_FAILED_DRIVER_ENTRY	The driver was not loaded because it failed its initialization call.
0x00000288 ERROR_DEVICE_ENUMERATION_ERROR	The device encountered an error while applying power or reading the device configuration. This <b>may</b> be caused by a failure of your hardware or by a poor connection.
0x00000289 ERROR_MOUNT_POINT_NOT_RESOLVED	The create operation failed because the name contained at least one mount point that resolves to a volume to which the specified device object is not attached.
0x0000028A ERROR_INVALID_DEVICE_OBJECT_PARAMETER	The device object parameter is either not a valid device object or is not attached to the volume specified by the file name.
0x0000028B ERROR_MCA_OCCURED	A machine check error has occurred. Check the system event log for additional information.
0x0000028C ERROR_DRIVER_DATABASE_ERROR	There was an error [%2] processing the driver database.
0x0000028D ERROR_SYSTEM_HIVE_TOO_LARGE	The system hive size has exceeded its limit.
0x0000028E ERROR_DRIVER_FAILED_PRIOR_UNLOAD	The driver could not be loaded because a previous version of the driver is still in memory.
0x0000028F ERROR_VOLSNAP_PREPARE_HIBERNATE	{Volume Shadow Copy Service} Wait while the Volume Shadow Copy Service prepares volume %hs for hibernation.
0x00000290 ERROR_HIBERNATION_FAILURE	The system has failed to hibernate (the error code is %hs). Hibernation will be disabled until the system is restarted.
0x00000299 ERROR_FILE_SYSTEM_LIMITATION	The requested operation could not be completed due to a file system limitation.
0x0000029C ERROR_ASSERTION_FAILURE	An assertion failure has occurred.
0x0000029D	An error occurred in the Advanced Configuration and

Win32 error codes	Description
ERROR_ACPI_ERROR	Power Interface (ACPI) subsystem.
0x0000029E ERROR_WOW_ASSERTION	WOW assertion error.
0x0000029F ERROR_PNP_BAD_MPS_TABLE	A device is missing in the system BIOS MultiProcessor Specification (MPS) table. This device will not be used. Contact your system vendor for system BIOS update.
0x000002A0 ERROR_PNP_TRANSLATION_FAILED	A translator failed to translate resources.
0x000002A1 ERROR_PNP_IRQ_TRANSLATION_FAILED	An interrupt request (IRQ) translator failed to translate resources.
0x000002A2 ERROR_PNP_INVALID_ID	Driver %2 returned invalid ID for a child device (%3).
0x000002A3 ERROR_WAKE_SYSTEM_DEBUGGER	{Kernel Debugger Awakened} the system debugger was awakened by an interrupt.
0x000002A4 ERROR_HANDLES_CLOSED	{Handles Closed} Handles to objects have been automatically closed because of the requested operation.
0x000002A5 ERROR_EXTRANEIOUS_INFORMATION	{Too Much Information} The specified ACL contained more information than was expected.
0x000002A6 ERROR_RXACT_COMMIT_NECESSARY	This warning level status indicates that the transaction state already exists for the registry subtree, but that a transaction commit was previously aborted. The commit has NOT been completed, but it has not been rolled back either (so it <b>maycan</b> still be committed if desired).
0x000002A7 ERROR_MEDIA_CHECK	{Media Changed} The media <b>maymight</b> have changed.
0x000002A8 ERROR_GUID_SUBSTITUTION_MADE	{GUID Substitution} During the translation of a GUID to a Windows SID, no administratively defined GUID prefix was found. A substitute prefix was used, which will not compromise system security. However, this <b>maymight</b> provide more restrictive access than intended.
0x000002A9	The create operation stopped

Win32 error codes	Description
ERROR_STOPPED_ON_SYMLINK	after reaching a symbolic link.
0x000002AA ERROR_LONGJUMP	A long jump has been executed.
0x000002AB ERROR_PLUGPLAY_QUERY_VETOED	The Plug and Play query operation was not successful.
0x000002AC ERROR_UNWIND_CONSOLIDATE	A frame consolidation has been executed.
0x000002AD ERROR_REGISTRY_HIVE_RECOVERED	{Registry Hive Recovered} Registry hive (file): %hs was corrupted and it has been recovered. Some data might have been lost.
0x000002AE ERROR_DLL_MIGHT_BE_INSECURE	The application is attempting to run executable code from the module %hs. This <b>may</b> be insecure. An alternative, %hs, is available. Should the application use the secure module %hs?
0x000002AF ERROR_DLL_MIGHT_BE_INCOMPATIBLE	The application is loading executable code from the module %hs. This is secure, but <b>may</b> be incompatible with previous releases of the operating system. An alternative, %hs, is available. Should the application use the secure module %hs?
0x000002B0 ERROR_DBG_EXCEPTION_NOT_HANDLED	Debugger did not handle the exception.
0x000002B1 ERROR_DBG_REPLY_LATER	Debugger will reply later.
0x000002B2 ERROR_DBG_UNABLE_TO_PROVIDE_HANDLE	Debugger cannot provide handle.
0x000002B3 ERROR_DBG_TERMINATE_THREAD	Debugger terminated thread.
0x000002B4 ERROR_DBG_TERMINATE_PROCESS	Debugger terminated process.
0x000002B5 ERROR_DBG_CONTROL_C	Debugger got control C.
0x000002B6 ERROR_DBG_PRINTEXCEPTION_C	Debugger printed exception on control C.
0x000002B7 ERROR_DBG_RIPEXCEPTION	Debugger received Routing Information Protocol (RIP) exception.
0x000002B8	Debugger received control break.

<b>Win32 error codes</b>	<b>Description</b>
ERROR_DBG_CONTROL_BREAK	
0x000002B9 ERROR_DBG_COMMAND_EXCEPTION	Debugger command communication exception.
0x000002BA ERROR_OBJECT_NAME_EXISTS	{Object Exists} An attempt was made to create an object and the object name already existed.
0x000002BB ERROR_THREAD_WAS_SUSPENDED	{Thread Suspended} A thread termination occurred while the thread was suspended. The thread was resumed and termination proceeded.
0x000002BC ERROR_IMAGE_NOT_AT_BASE	{Image Relocated} An image file could not be mapped at the address specified in the image file. Local fixes must be performed on this image.
0x000002BD ERROR_RXACT_STATE_CREATED	This informational level status indicates that a specified registry subtree transaction state did not yet exist and had to be created.
0x000002BE ERROR_SEGMENT_NOTIFICATION	{Segment Load} A virtual DOS machine (VDM) is loading, unloading, or moving an MS-DOS or Win16 program segment image. An exception is raised so a debugger can load, unload, or track symbols and breakpoints within these 16-bit segments.
0x000002BF ERROR_BAD_CURRENT_DIRECTORY	{Invalid Current Directory} The process cannot switch to the startup current directory %hs. Select OK to set current directory to %hs, or select CANCEL to exit.
0x000002C0 ERROR_FT_READ_RECOVERY_FROM_BACKUP	{Redundant Read} To satisfy a read request, the NT fault-tolerant file system successfully read the requested data from a redundant copy. This was done because the file system encountered a failure on a member of the fault-tolerant volume, but it was unable to reassign the failing area of the device.
0x000002C1 ERROR_FT_WRITE_RECOVERY	{Redundant Write} To satisfy a write request, the Windows NT fault-tolerant file system successfully wrote a redundant copy of the information. This was done because the file system encountered a failure on a member of the fault-tolerant volume, but it was not able to

Win32 error codes	Description
	reassign the failing area of the device.
0x000002C2 ERROR_IMAGE_MACHINE_TYPE_MISMATCH	{Machine Type Mismatch} The image file %hs is valid, but is for a machine type other than the current machine. Select OK to continue, or CANCEL to fail the DLL load.
0x000002C3 ERROR_RECEIVE_PARTIAL	{Partial Data Received} The network transport returned partial data to its client. The remaining data will be sent later.
0x000002C4 ERROR_RECEIVE_EXPEDITED	{Expedited Data Received} The network transport returned data to its client that was marked as expedited by the remote system.
0x000002C5 ERROR_RECEIVE_PARTIAL_EXPEDITED	{Partial Expedited Data Received} The network transport returned partial data to its client and this data was marked as expedited by the remote system. The remaining data will be sent later.
0x000002C6 ERROR_EVENT_DONE	{TDI Event Done} The TDI indication has completed successfully.
0x000002C7 ERROR_EVENT_PENDING	{TDI Event Pending} The TDI indication has entered the pending state.
0x000002C8 ERROR_CHECKING_FILE_SYSTEM	Checking file system on %wZ.
0x000002C9 ERROR_FATAL_APP_EXIT	{Fatal Application Exit} %hs.
0x000002CA ERROR_PREDEFINED_HANDLE	The specified registry key is referenced by a predefined handle.
0x000002CB ERROR_WAS_UNLOCKED	{Page Unlocked} The page protection of a locked page was changed to 'No Access' and the page was unlocked from memory and from the process.
0x000002CD ERROR_WAS_LOCKED	{Page Locked} One of the pages to lock was already locked.
0x000002CF ERROR_ALREADY_WIN32	The value already corresponds with a Win 32 error code.
0x000002D0 ERROR_IMAGE_MACHINE_TYPE_MISMATCH_EXE	{Machine Type Mismatch} The image file %hs is valid, but is for a machine type other than the current machine.

<b>Win32 error codes</b>	<b>Description</b>
0x000002D1 ERROR_NO_YIELD_PERFORMED	A yield execution was performed and no thread was available to run.
0x000002D2 ERROR_TIMER_RESUME_IGNORED	The resume flag to a timer API was ignored.
0x000002D3 ERROR_ARBITRATION_UNHANDLED	The arbiter has deferred arbitration of these resources to its parent.
0x000002D4 ERROR_CARDBUS_NOT_SUPPORTED	The inserted CardBus device cannot be started because of a configuration error on %hs".
0x000002D5 ERROR_MP_PROCESSOR_MISMATCH	The CPUs in this multiprocessor system are not all the same revision level. To use all processors the operating system restricts itself to the features of the least capable processor in the system. If problems occur with this system, contact the CPU manufacturer to see if this mix of processors is supported.
0x000002D6 ERROR_HIBERNATED	The system was put into hibernation.
0x000002D7 ERROR_RESUME_HIBERNATION	The system was resumed from hibernation.
0x000002D8 ERROR_FIRMWARE_UPDATED	Windows has detected that the system firmware (BIOS) was updated (previous firmware date = %2, current firmware date %3).
0x000002D9 ERROR_DRIVERS_LEAKING_LOCKED_PAGES	A device driver is leaking locked I/O pages, causing system degradation. The system has automatically enabled a tracking code to try and catch the culprit.
0x000002DA ERROR_WAKE_SYSTEM	The system has awoken.
0x000002DF ERROR_ABANDONED_WAIT_0	The call failed because the handle associated with it was closed.
0x000002E4 ERROR_ELEVATION_REQUIRED	The requested operation requires elevation.
0x000002E5 ERROR_REPARSE	A reparse should be performed by the object manager because the name of the file resulted in a symbolic link.
0x000002E6 ERROR_OPLOCK_BREAK_IN_PROGRESS	An open/create operation completed while an oplock break

Win32 error codes	Description
	is underway.
0x000002E7 ERROR_VOLUME_MOUNTED	A new volume has been mounted by a file system.
0x000002E8 ERROR_RXACT_COMMITTED	This success level status indicates that the transaction state already exists for the registry subtree, but that a transaction commit was previously aborted. The commit has now been completed.
0x000002E9 ERROR_NOTIFY_CLEANUP	This indicates that a notify change request has been completed due to closing the handle which made the notify change request.
0x000002EA ERROR_PRIMARY_TRANSPORT_CONNECT_FAILED	{Connect Failure on Primary Transport} An attempt was made to connect to the remote server %hs on the primary transport, but the connection failed. The computer was able to connect on a secondary transport.
0x000002EB ERROR_PAGE_FAULT_TRANSITION	Page fault was a transition fault.
0x000002EC ERROR_PAGE_FAULT_DEMAND_ZERO	Page fault was a demand zero fault.
0x000002ED ERROR_PAGE_FAULT_COPY_ON_WRITE	Page fault was a demand zero fault.
0x000002EE ERROR_PAGE_FAULT_GUARD_PAGE	Page fault was a demand zero fault.
0x000002EF ERROR_PAGE_FAULT_PAGING_FILE	Page fault was satisfied by reading from a secondary storage device.
0x000002F0 ERROR_CACHE_PAGE_LOCKED	Cached page was locked during operation.
0x000002F1 ERROR_CRASH_DUMP	Crash dump exists in paging file.
0x000002F2 ERROR_BUFFER_ALL_ZEROS	Specified buffer contains all zeros.
0x000002F3 ERROR_REPARSE_OBJECT	A reparse should be performed by the object manager because the name of the file resulted in a symbolic link.
0x000002F4 ERROR_RESOURCE_REQUIREMENTS_CHANGED	The device has succeeded a query-stop and its resource

<b>Win32 error codes</b>	<b>Description</b>
	requirements have changed.
0x000002F5 ERROR_TRANSLATION_COMPLETE	The translator has translated these resources into the global space and no further translations should be performed.
0x000002F6 ERROR_NOTHING_TO_TERMINATE	A process being terminated has no threads to terminate.
0x000002F7 ERROR_PROCESS_NOT_IN_JOB	The specified process is not part of a job.
0x000002F8 ERROR_PROCESS_IN_JOB	The specified process is part of a job.
0x000002F9 ERROR_VOLSNAP_HIBERNATE_READY	{Volume Shadow Copy Service} The system is now ready for hibernation.
0x000002FA ERROR_FSFILTER_OP_COMPLETED_SUCCESSFULLY	A file system or file system filter driver has successfully completed an FsFilter operation.
0x000002FB ERROR_INTERRUPT_VECTOR_ALREADY_CONNECTED	The specified interrupt vector was already connected.
0x000002FC ERROR_INTERRUPT_STILL_CONNECTED	The specified interrupt vector is still connected.
0x000002FD ERROR_WAIT_FOR_OPLOCK	An operation is blocked waiting for an oplock.
0x000002FE ERROR_DBG_EXCEPTION_HANDLED	Debugger handled exception.
0x000002FF ERROR_DBG_CONTINUE	Debugger continued.
0x00000300 ERROR_CALLBACK_POP_STACK	An exception occurred in a user mode callback and the kernel callback frame should be removed.
0x00000301 ERROR_COMPRESSION_DISABLED	Compression is disabled for this volume.
0x00000302 ERROR_CANTFETCHBACKWARDS	The data provider cannot fetch backward through a result set.
0x00000303 ERROR_CANTSCROLLBACKWARDS	The data provider cannot scroll backward through a result set.
0x00000304 ERROR_ROWSNOTRELEASED	The data provider requires that previously fetched data is released before asking for more data.
0x00000305	The data provider was not able to interpret the flags set for a

Win32 error codes	Description
ERROR_BAD_ACCESSOR_FLAGS	column binding in an accessor.
0x00000306 ERROR_ERRORS_ENCOUNTERED	One or more errors occurred while processing the request.
0x00000307 ERROR_NOT_CAPABLE	The implementation is not capable of performing the request.
0x00000308 ERROR_REQUEST_OUT_OF_SEQUENCE	The client of a component requested an operation that is not valid given the state of the component instance.
0x00000309 ERROR_VERSION_PARSE_ERROR	A version number could not be parsed.
0x0000030A ERROR_BADSTARTPOSITION	The iterator's start position is invalid.
0x0000030B ERROR_MEMORY_HARDWARE	The hardware has reported an uncorrectable memory error.
0x0000030C ERROR_DISK_REPAIR_DISABLED	The attempted operation required self-healing to be enabled.
0x0000030D ERROR_INSUFFICIENT_RESOURCE_FOR_SPECIFIED_SHARED_SECTION_SIZE	The Desktop heap encountered an error while allocating session memory. There is more information in the system event log.
0x0000030E ERROR_SYSTEM_POWERSTATE_TRANSITION	The system power state is transitioning from %2 to %3.
0x0000030F ERROR_SYSTEM_POWERSTATE_COMPLEX_TRANSITION	The system power state is transitioning from %2 to %3 but could enter %4.
0x00000310 ERROR_MCA_EXCEPTION	A thread is getting dispatched with MCA EXCEPTION because of MCA.
0x00000311 ERROR_ACCESS_AUDIT_BY_POLICY	Access to %1 is monitored by policy rule %2.
0x00000312 ERROR_ACCESS_DISABLED_NO_SAFER_UI_BY_POLICY	Access to %1 has been restricted by your administrator by policy rule %2.
0x00000313 ERROR_ABANDON_HIBERFILE	A valid hibernation file has been invalidated and should be abandoned.
0x00000314 ERROR_LOST_WRITEBEHIND_DATA_NETWORK_DISCONNECTED	{Delayed Write Failed} Windows was unable to save all the data for the file %hs; the data has been lost. This error <b>may can</b> be caused by network connectivity issues. Try to save this file

Win32 error codes	Description
	elsewhere.
0x00000315 ERROR_LOST_WRITEBEHIND_DATA_NETWORK_SERVER_ERROR	{Delayed Write Failed} Windows was unable to save all the data for the file %hs; the data has been lost. This error was returned by the server on which the file exists. Try to save this file elsewhere.
0x00000316 ERROR_LOST_WRITEBEHIND_DATA_LOCAL_DISK_ERROR	{Delayed Write Failed} Windows was unable to save all the data for the file %hs; the data has been lost. This error <del>may</del> can be caused if the device has been removed or the media is write-protected.
0x000003E2 ERROR_EA_ACCESS_DENIED	Access to the extended attribute was denied.
0x000003E3 ERROR_OPERATION_ABORTED	The I/O operation has been aborted because of either a thread exit or an application request.
0x000003E4 ERROR_IO_INCOMPLETE	Overlapped I/O event is not in a signaled state.
0x000003E5 ERROR_IO_PENDING	Overlapped I/O operation is in progress.
0x000003E6 ERROR_NOACCESS	Invalid access to memory location.
0x000003E7 ERROR_SWAPERROR	Error performing in-page operation.
0x000003E9 ERROR_STACK_OVERFLOW	Recursion too deep; the stack overflowed.
0x000003EA ERROR_INVALID_MESSAGE	The window cannot act on the sent message.
0x000003EB ERROR_CAN_NOT_COMPLETE	Cannot complete this function.
0x000003EC ERROR_INVALID_FLAGS	Invalid flags.
0x000003ED ERROR_UNRECOGNIZED_VOLUME	The volume does not contain a recognized file system. Be sure that all required file system drivers are loaded and that the volume is not corrupted.
0x000003EE ERROR_FILE_INVALID	The volume for a file has been externally altered so that the opened file is no longer valid.

<b>Win32 error codes</b>	<b>Description</b>
0x000003EF ERROR_FULLSCREEN_MODE	The requested operation cannot be performed in full-screen mode.
0x000003F0 ERROR_NO_TOKEN	An attempt was made to reference a token that does not exist.
0x000003F1 ERROR_BADDB	The configuration registry database is corrupt.
0x000003F2 ERROR_BADKEY	The configuration registry key is invalid.
0x000003F3 ERROR_CANTOPEN	The configuration registry key could not be opened.
0x000003F4 ERROR_CANTREAD	The configuration registry key could not be read.
0x000003F5 ERROR_CANTWRITE	The configuration registry key could not be written.
0x000003F6 ERROR_REGISTRY_RECOVERED	One of the files in the registry database had to be recovered by use of a log or alternate copy. The recovery was successful.
0x000003F7 ERROR_REGISTRY_CORRUPT	The registry is corrupted. The structure of one of the files containing registry data is corrupted, or the system's memory image of the file is corrupted, or the file could not be recovered because the alternate copy or log was absent or corrupted.
0x000003F8 ERROR_REGISTRY_IO_FAILED	An I/O operation initiated by the registry failed and cannot be recovered. The registry could not read in, write out, or flush one of the files that contain the system's image of the registry.
0x000003F9 ERROR_NOT_REGISTRY_FILE	The system attempted to load or restore a file into the registry, but the specified file is not in a registry file format.
0x000003FA ERROR_KEY_DELETED	Illegal operation attempted on a registry key that has been marked for deletion.
0x000003FB ERROR_NO_LOG_SPACE	System could not allocate the required space in a registry log.
0x000003FC ERROR_KEY_HAS_CHILDREN	Cannot create a symbolic link in a registry key that already has subkeys or values.

<b>Win32 error codes</b>	<b>Description</b>
0x000003FD ERROR_CHILD_MUST_BE_VOLATILE	Cannot create a stable subkey under a volatile parent key.
0x000003FE ERROR_NOTIFY_ENUM_DIR	A notify change request is being completed and the information is not being returned in the caller's buffer. The caller now needs to enumerate the files to find the changes.
0x0000041B ERROR_DEPENDENT_SERVICES_RUNNING	A stop control has been sent to a service that other running services are dependent on.
0x0000041C ERROR_INVALID_SERVICE_CONTROL	The requested control is not valid for this service.
0x0000041D ERROR_SERVICE_REQUEST_TIMEOUT	The service did not respond to the start or control request in a timely fashion.
0x0000041E ERROR_SERVICE_NO_THREAD	A thread could not be created for the service.
0x0000041F ERROR_SERVICE_DATABASE_LOCKED	The service database is locked.
0x00000420 ERROR_SERVICE_ALREADY_RUNNING	An instance of the service is already running.
0x00000421 ERROR_INVALID_SERVICE_ACCOUNT	The account name is invalid or does not exist, or the password is invalid for the account name specified.
0x00000422 ERROR_SERVICE_DISABLED	The service cannot be started, either because it is disabled or because it has no enabled devices associated with it.
0x00000423 ERROR_CIRCULAR_DEPENDENCY	Circular service dependency was specified.
0x00000424 ERROR_SERVICE_DOES_NOT_EXIST	The specified service does not exist as an installed service.
0x00000425 ERROR_SERVICE_CANNOT_ACCEPT_CTRL	The service cannot accept control messages at this time.
0x00000426 ERROR_SERVICE_NOT_ACTIVE	The service has not been started.
0x00000427 ERROR_FAILED_SERVICE_CONTROLLER_CONNECT	The service process could not connect to the service controller.
0x00000428 ERROR_EXCEPTION_IN_SERVICE	An exception occurred in the service when handling the control request.

<b>Win32 error codes</b>	<b>Description</b>
0x00000429 ERROR_DATABASE_DOES_NOT_EXIST	The database specified does not exist.
0x0000042A ERROR_SERVICE_SPECIFIC_ERROR	The service has returned a service-specific error code.
0x0000042B ERROR_PROCESS_ABORTED	The process terminated unexpectedly.
0x0000042C ERROR_SERVICE_DEPENDENCY_FAIL	The dependency service or group failed to start.
0x0000042D ERROR_SERVICE_LOGON_FAILED	The service did not start due to a logon failure.
0x0000042E ERROR_SERVICE_START_HANG	After starting, the service stopped responding in a start-pending state.
0x0000042F ERROR_INVALID_SERVICE_LOCK	The specified service database lock is invalid.
0x00000430 ERROR_SERVICE_MARKED_FOR_DELETE	The specified service has been marked for deletion.
0x00000431 ERROR_SERVICE_EXISTS	The specified service already exists.
0x00000432 ERROR_ALREADY_RUNNING_LKG	The system is currently running with the last-known-good configuration.
0x00000433 ERROR_SERVICE_DEPENDENCY_DELETED	The dependency service does not exist or has been marked for deletion.
0x00000434 ERROR_BOOT_ALREADY_ACCEPTED	The current boot has already been accepted for use as the last-known-good control set.
0x00000435 ERROR_SERVICE_NEVER_STARTED	No attempts to start the service have been made since the last boot.
0x00000436 ERROR_DUPLICATE_SERVICE_NAME	The name is already in use as either a service name or a service display name.
0x00000437 ERROR_DIFFERENT_SERVICE_ACCOUNT	The account specified for this service is different from the account specified for other services running in the same process.
0x00000438 ERROR_CANNOT_DETECT_DRIVER_FAILURE	Failure actions can only be set for Win32 services, not for drivers.
0x00000439 ERROR_CANNOT_DETECT_PROCESS_ABORT	This service runs in the same process as the service control

Win32 error codes	Description
	manager. Therefore, the service control manager cannot take action if this service's process terminates unexpectedly.
0x0000043A ERROR_NO_RECOVERY_PROGRAM	No recovery program has been configured for this service.
0x0000043B ERROR_SERVICE_NOT_IN_EXE	The executable program that this service is configured to run in does not implement the service.
0x0000043C ERROR_NOT_SAFEBOOT_SERVICE	This service cannot be started in Safe Mode.
0x0000044C ERROR_END_OF_MEDIA	The physical end of the tape has been reached.
0x0000044D ERROR_FILEMARK_DETECTED	A tape access reached a filemark.
0x0000044E ERROR_BEGINNING_OF_MEDIA	The beginning of the tape or a partition was encountered.
0x0000044F ERROR_SETMARK_DETECTED	A tape access reached the end of a set of files.
0x00000450 ERROR_NO_DATA_DETECTED	No more data is on the tape.
0x00000451 ERROR_PARTITION_FAILURE	Tape could not be partitioned.
0x00000452 ERROR_INVALID_BLOCK_LENGTH	When accessing a new tape of a multivolume partition, the current block size is incorrect.
0x00000453 ERROR_DEVICE_NOT_PARTITIONED	Tape partition information could not be found when loading a tape.
0x00000454 ERROR_UNABLE_TO_LOCK_MEDIA	Unable to lock the media eject mechanism.
0x00000455 ERROR_UNABLE_TO_UNLOAD_MEDIA	Unable to unload the media.
0x00000456 ERROR_MEDIA_CHANGED	The media in the drive <b>may</b> have changed.
0x00000457 ERROR_BUS_RESET	The I/O bus was reset.
0x00000458 ERROR_NO_MEDIA_IN_DRIVE	No media in drive.
0x00000459 ERROR_NO_UNICODE_TRANSLATION	No mapping for the Unicode character exists in the target multibyte code page.

<b>Win32 error codes</b>	<b>Description</b>
0x0000045A ERROR_DLL_INIT_FAILED	A DLL initialization routine failed.
0x0000045B ERROR_SHUTDOWN_IN_PROGRESS	A system shutdown is in progress.
0x0000045C ERROR_NO_SHUTDOWN_IN_PROGRESS	Unable to abort the system shutdown because no shutdown was in progress.
0x0000045D ERROR_IO_DEVICE	The request could not be performed because of an I/O device error.
0x0000045E ERROR_SERIAL_NO_DEVICE	No serial device was successfully initialized. The serial driver will unload.
0x0000045F ERROR_IRQ_BUSY	Unable to open a device that was sharing an IRQ with other devices. At least one other device that uses that IRQ was already opened.
0x00000460 ERROR_MORE_WRITES	A serial I/O operation was completed by another write to the serial port. (The IOCTL_SERIAL_XOFF_COUNTER reached zero.)
0x00000461 ERROR_COUNTER_TIMEOUT	A serial I/O operation completed because the time-out period expired. (The IOCTL_SERIAL_XOFF_COUNTER did not reach zero.)
0x00000462 ERROR_FLOPPY_ID_MARK_NOT_FOUND	No ID address mark was found on the floppy disk.
0x00000463 ERROR_FLOPPY_WRONG_CYLINDER	Mismatch between the floppy disk sector ID field and the floppy disk controller track address.
0x00000464 ERROR_FLOPPY_UNKNOWN_ERROR	The floppy disk controller reported an error that is not recognized by the floppy disk driver.
0x00000465 ERROR_FLOPPY_BAD_REGISTERS	The floppy disk controller returned inconsistent results in its registers.
0x00000466 ERROR_DISK_RECALIBRATE_FAILED	While accessing the hard disk, a recalibrate operation failed, even after retries.
0x00000467 ERROR_DISK_OPERATION_FAILED	While accessing the hard disk, a disk operation failed even after retries.
0x00000468	While accessing the hard disk, a

<b>Win32 error codes</b>	<b>Description</b>
ERROR_DISK_RESET_FAILED	disk controller reset was needed, but that also failed.
0x00000469 ERROR_EOM_OVERFLOW	Physical end of tape encountered.
0x0000046A ERROR_NOT_ENOUGH_SERVER_MEMORY	Not enough server storage is available to process this command.
0x0000046B ERROR_POSSIBLE_DEADLOCK	A potential deadlock condition has been detected.
0x0000046C ERROR_MAPPED_ALIGNMENT	The base address or the file offset specified does not have the proper alignment.
0x00000474 ERROR_SET_POWER_STATE_VETOED	An attempt to change the system power state was vetoed by another application or driver.
0x00000475 ERROR_SET_POWER_STATE_FAILED	The system BIOS failed an attempt to change the system power state.
0x00000476 ERROR_TOO_MANY_LINKS	An attempt was made to create more links on a file than the file system supports.
0x0000047E ERROR_OLD_WIN_VERSION	The specified program requires a newer version of Windows.
0x0000047F ERROR_APP_WRONG_OS	The specified program is not a Windows or MS-DOS program.
0x00000480 ERROR_SINGLE_INSTANCE_APP	Cannot start more than one instance of the specified program.
0x00000481 ERROR_RMODE_APP	The specified program was written for an earlier version of Windows.
0x00000482 ERROR_INVALID_DLL	One of the library files needed to run this application is damaged.
0x00000483 ERROR_NO_ASSOCIATION	No application is associated with the specified file for this operation.
0x00000484 ERROR_DDE_FAIL	An error occurred in sending the command to the application.
0x00000485 ERROR_DLL_NOT_FOUND	One of the library files needed to run this application cannot be found.
0x00000486 ERROR_NO_MORE_USER_HANDLES	The current process has used all of its system allowance of handles for Windows manager objects.

<b>Win32 error codes</b>	<b>Description</b>
0x00000487 ERROR_MESSAGE_SYNC_ONLY	The message can be used only with synchronous operations.
0x00000488 ERROR_SOURCE_ELEMENT_EMPTY	The indicated source element has no media.
0x00000489 ERROR_DESTINATION_ELEMENT_FULL	The indicated destination element already contains media.
0x0000048A ERROR_ILLEGAL_ELEMENT_ADDRESS	The indicated element does not exist.
0x0000048B ERROR_MAGAZINE_NOT_PRESENT	The indicated element is part of a magazine that is not present.
0x0000048C ERROR_DEVICE_REINITIALIZATION_NEEDED	The indicated device requires re-initialization due to hardware errors.
0x0000048D ERROR_DEVICE_REQUIRES_CLEANING	The device has indicated that cleaning is required before further operations are attempted.
0x0000048E ERROR_DEVICE_DOOR_OPEN	The device has indicated that its door is open.
0x0000048F ERROR_DEVICE_NOT_CONNECTED	The device is not connected.
0x00000490 ERROR_NOT_FOUND	Element not found.
0x00000491 ERROR_NO_MATCH	There was no match for the specified key in the index.
0x00000492 ERROR_SET_NOT_FOUND	The property set specified does not exist on the object.
0x00000493 ERROR_POINT_NOT_FOUND	The point passed to GetMouseMovePoints is not in the buffer.
0x00000494 ERROR_NO_TRACKING_SERVICE	The tracking (workstation) service is not running.
0x00000495 ERROR_NO_VOLUME_ID	The volume ID could not be found.
0x00000497 ERROR_UNABLE_TO_REMOVE_REPLACED	Unable to remove the file to be replaced.
0x00000498 ERROR_UNABLE_TO_MOVE_REPLACEMENT	Unable to move the replacement file to the file to be replaced. The file to be replaced has retained its original name.
0x00000499	Unable to move the replacement file to the file to be replaced. The

Win32 error codes	Description
ERROR_UNABLE_TO_MOVE_REPLACEMENT_2	file to be replaced has been renamed using the backup name.
0x0000049A ERROR_JOURNAL_DELETE_IN_PROGRESS	The volume change journal is being deleted.
0x0000049B ERROR_JOURNAL_NOT_ACTIVE	The volume change journal is not active.
0x0000049C ERROR_POTENTIAL_FILE_FOUND	A file was found, but it <b>may</b> not be the correct file.
0x0000049D ERROR_JOURNAL_ENTRY_DELETED	The journal entry has been deleted from the journal.
0x000004A6 ERROR_SHUTDOWN_IS_SCHEDULED	A system shutdown has already been scheduled.
0x000004A7 ERROR_SHUTDOWN_USERS_LOGGED_ON	The system shutdown cannot be initiated because there are other users logged on to the computer.
0x000004B0 ERROR_BAD_DEVICE	The specified device name is invalid.
0x000004B1 ERROR_CONNECTION_UNAVAIL	The device is not currently connected but it is a remembered connection.
0x000004B2 ERROR_DEVICE_ALREADY_REMEMBERED	The local device name has a remembered connection to another network resource.
0x000004B3 ERROR_NO_NET_OR_BAD_PATH	The network path was either typed incorrectly, does not exist, or the network provider is not currently available. Try retyping the path or contact your network administrator.
0x000004B4 ERROR_BAD_PROVIDER	The specified network provider name is invalid.
0x000004B5 ERROR_CANNOT_OPEN_PROFILE	Unable to open the network connection profile.
0x000004B6 ERROR_BAD_PROFILE	The network connection profile is corrupted.
0x000004B7 ERROR_NOT_CONTAINER	Cannot enumerate a noncontainer.
0x000004B8 ERROR_EXTENDED_ERROR	An extended error has occurred.
0x000004B9 ERROR_INVALID_GROUPNAME	The format of the specified group name is invalid.

<b>Win32 error codes</b>	<b>Description</b>
0x000004BA ERROR_INVALID_COMPUTERNAME	The format of the specified computer name is invalid.
0x000004BB ERROR_INVALID_EVENTNAME	The format of the specified event name is invalid.
0x000004BC ERROR_INVALID_DOMAINNAME	The format of the specified domain name is invalid.
0x000004BD ERROR_INVALID_SERVICENAME	The format of the specified service name is invalid.
0x000004BE ERROR_INVALID_NETNAME	The format of the specified network name is invalid.
0x000004BF ERROR_INVALID_SHARENAME	The format of the specified share name is invalid.
0x000004C0 ERROR_INVALID_PASSWORDNAME	The format of the specified password is invalid.
0x000004C1 ERROR_INVALID_MESSAGE_NAME	The format of the specified message name is invalid.
0x000004C2 ERROR_INVALID_MESSAGEDEST	The format of the specified message destination is invalid.
0x000004C3 ERROR_SESSION_CREDENTIAL_CONFLICT	Multiple connections to a server or shared resource by the same user, using more than one user name, are not allowed. Disconnect all previous connections to the server or shared resource and try again.
0x000004C4 ERROR_REMOTE_SESSION_LIMIT_EXCEEDED	An attempt was made to establish a session to a network server, but there are already too many sessions established to that server.
0x000004C5 ERROR_DUP_DOMAINNAME	The workgroup or domain name is already in use by another computer on the network.
0x000004C6 ERROR_NO_NETWORK	The network is not present or not started.
0x000004C7 ERROR_CANCELLED	The operation was canceled by the user.
0x000004C8 ERROR_USER_MAPPED_FILE	The requested operation cannot be performed on a file with a user-mapped section open.
0x000004C9 ERROR_CONNECTION_REFUSED	The remote system refused the network connection.
0x000004CA	The network connection was

<b>Win32 error codes</b>	<b>Description</b>
ERROR_GRACEFUL_DISCONNECT	gracefully closed.
0x000004CB ERROR_ADDRESS_ALREADY_ASSOCIATED	The network transport endpoint already has an address associated with it.
0x000004CC ERROR_ADDRESS_NOT_ASSOCIATED	An address has not yet been associated with the network endpoint.
0x000004CD ERROR_CONNECTION_INVALID	An operation was attempted on a nonexistent network connection.
0x000004CE ERROR_CONNECTION_ACTIVE	An invalid operation was attempted on an active network connection.
0x000004CF ERROR_NETWORK_UNREACHABLE	The network location cannot be reached. For information about network troubleshooting, see Windows Help.
0x000004D0 ERROR_HOST_UNREACHABLE	The network location cannot be reached. For information about network troubleshooting, see Windows Help.
0x000004D1 ERROR_PROTOCOL_UNREACHABLE	The network location cannot be reached. For information about network troubleshooting, see Windows Help.
0x000004D2 ERROR_PORT_UNREACHABLE	No service is operating at the destination network endpoint on the remote system.
0x000004D3 ERROR_REQUEST_ABORTED	The request was aborted.
0x000004D4 ERROR_CONNECTION_ABORTED	The network connection was aborted by the local system.
0x000004D5 ERROR_RETRY	The operation could not be completed. A retry should be performed.
0x000004D6 ERROR_CONNECTION_COUNT_LIMIT	A connection to the server could not be made because the limit on the number of concurrent connections for this account has been reached.
0x000004D7 ERROR_LOGIN_TIME_RESTRICTION	Attempting to log on during an unauthorized time of day for this account.
0x000004D8 ERROR_LOGIN_WKSTA_RESTRICTION	The account is not authorized to log on from this station.
0x000004D9 ERROR_INCORRECT_ADDRESS	The network address could not be used for the operation requested.

<b>Win32 error codes</b>	<b>Description</b>
0x000004DA ERROR_ALREADY_REGISTERED	The service is already registered.
0x000004DB ERROR_SERVICE_NOT_FOUND	The specified service does not exist.
0x000004DC ERROR_NOT_AUTHENTICATED	The operation being requested was not performed because the user has not been authenticated.
0x000004DD ERROR_NOT_LOGGED_ON	The operation being requested was not performed because the user has not logged on to the network. The specified service does not exist.
0x000004DE ERROR_CONTINUE	Continue with work in progress.
0x000004DF ERROR_ALREADY_INITIALIZED	An attempt was made to perform an initialization operation when initialization has already been completed.
0x000004E0 ERROR_NO_MORE_DEVICES	No more local devices.
0x000004E1 ERROR_NO_SUCH_SITE	The specified site does not exist.
0x000004E2 ERROR_DOMAIN_CONTROLLER_EXISTS	A domain controller with the specified name already exists.
0x000004E3 ERROR_ONLY_IF_CONNECTED	This operation is supported only when you are connected to the server.
0x000004E4 ERROR_OVERRIDE_NOCHANGES	The group policy framework should call the extension even if there are no changes.
0x000004E5 ERROR_BAD_USER_PROFILE	The specified user does not have a valid profile.
0x000004E6 ERROR_NOT_SUPPORTED_ON_SBS	This operation is not supported on a computer running Windows Server 2003 operating system for Small Business Server.
0x000004E7 ERROR_SERVER_SHUTDOWN_IN_PROGRESS	The server machine is shutting down.
0x000004E8 ERROR_HOST_DOWN	The remote system is not available. For information about network troubleshooting, see Windows Help.
0x000004E9 ERROR_NON_ACCOUNT_SID	The security identifier provided is not from an account domain.

<b>Win32 error codes</b>	<b>Description</b>
0x000004EA ERROR_NON_DOMAIN_SID	The security identifier provided does not have a domain component.
0x000004EB ERROR_APPHELP_BLOCK	AppHelp dialog canceled, thus preventing the application from starting.
0x000004EC ERROR_ACCESS_DISABLED_BY_POLICY	This program is blocked by Group Policy. For more information, contact your system administrator.
0x000004ED ERROR_REG_NAT_CONSUMPTION	A program attempt to use an invalid register value. Normally caused by an uninitialized register. This error is Itanium specific.
0x000004EE ERROR_CSCSHARE_OFFLINE	The share is currently offline or does not exist.
0x000004EF ERROR_PKINIT_FAILURE	The Kerberos protocol encountered an error while validating the KDC certificate during smartcard logon. There is more information in the system event log.
0x000004F0 ERROR_SMARTCARD_SUBSYSTEM_FAILURE	The Kerberos protocol encountered an error while attempting to utilize the smartcard subsystem.
0x000004F1 ERROR_DOWNGRADE_DETECTED	The system detected a possible attempt to compromise security. Ensure that you can contact the server that authenticated you.
0x000004F7 ERROR_MACHINE_LOCKED	The machine is locked and cannot be shut down without the force option.
0x000004F9 ERROR_CALLBACK_SUPPLIED_INVALID_DATA	An application-defined callback gave invalid data when called.
0x000004FA ERROR_SYNC_FOREGROUND_REFRESH_REQUIRED	The Group Policy framework should call the extension in the synchronous foreground policy refresh.
0x000004FB ERROR_DRIVER_BLOCKED	This driver has been blocked from loading.
0x000004FC ERROR_INVALID_IMPORT_OF_NON_DLL	A DLL referenced a module that was neither a DLL nor the process's executable image.
0x000004FD ERROR_ACCESS_DISABLED_WEBBLADE	Windows cannot open this program because it has been disabled.

Win32 error codes	Description
0x000004FE ERROR_ACCESS_DISABLED_WEBBLADE_TAMPER	Windows cannot open this program because the license enforcement system has been tampered with or become corrupted.
0x000004FF ERROR_RECOVERY_FAILURE	A transaction recover failed.
0x00000500 ERROR_ALREADY_FIBER	The current thread has already been converted to a fiber.
0x00000501 ERROR_ALREADY_THREAD	The current thread has already been converted from a fiber.
0x00000502 ERROR_STACK_BUFFER_OVERRUN	The system detected an overrun of a stack-based buffer in this application. This overrun could potentially allow a malicious user to gain control of this application.
0x00000503 ERROR_PARAMETER_QUOTA_EXCEEDED	Data present in one of the parameters is more than the function can operate on.
0x00000504 ERROR_DEBUGGER_INACTIVE	An attempt to perform an operation on a debug object failed because the object is in the process of being deleted.
0x00000505 ERROR_DELAY_LOAD_FAILED	An attempt to delay-load a .dll or get a function address in a delay-loaded .dll failed.
0x00000506 ERROR_VDM_DISALLOWED	%1 is a 16-bit application. You do not have permissions to execute 16-bit applications. Check your permissions with your system administrator.
0x00000507 ERROR_UNIDENTIFIED_ERROR	Insufficient information exists to identify the cause of failure.
0x00000508 ERROR_INVALID_CRUNTIME_PARAMETER	The parameter passed to a <b>C</b> runtime function is incorrect.
0x00000509 ERROR_BEYOND_VDL	The operation occurred beyond the valid data length of the file.
0x0000050A ERROR_INCOMPATIBLE_SERVICE_SID_TYPE	The service start failed because one or more services in the same process have an incompatible service SID type setting. A service with a restricted service SID type can only coexist in the same process with other services with a restricted SID type.
0x0000050B	The process hosting the driver

Win32 error codes	Description
ERROR_DRIVER_PROCESS_TERMINATED	for this device has been terminated.
0x0000050C ERROR_IMPLEMENTATION_LIMIT	An operation attempted to exceed an implementation-defined limit.
0x0000050D ERROR_PROCESS_IS_PROTECTED	Either the target process, or the target thread's containing process, is a protected process.
0x0000050E ERROR_SERVICE_NOTIFY_CLIENT_LAGGING	The service notification client is lagging too far behind the current state of services in the machine.
0x0000050F ERROR_DISK_QUOTA_EXCEEDED	An operation failed because the storage quota was exceeded.
0x00000510 ERROR_CONTENT_BLOCKED	An operation failed because the content was blocked.
0x00000511 ERROR_INCOMPATIBLE_SERVICE_PRIVILEGE	A privilege that the service requires to function properly does not exist in the service account configuration. <del>You may use the</del> The Services Microsoft Management Console (MMC) snap-in (Services.msc) and the Local Security Settings MMC snap-in (Secpol.msc) <del>can be used</del> to view the service configuration and the account configuration.
0x00000513 ERROR_INVALID_LABEL	Indicates a particular SID <del>may not</del> cannot be assigned as the label of an object.
0x00000514 ERROR_NOT_ALL_ASSIGNED	Not all privileges or groups referenced are assigned to the caller.
0x00000515 ERROR_SOME_NOT_MAPPED	Some mapping between account names and SIDs was not done.
0x00000516 ERROR_NO_QUOTAS_FOR_ACCOUNT	No system quota limits are specifically set for this account.
0x00000517 ERROR_LOCAL_USER_SESSION_KEY	No encryption key is available. A well-known encryption key was returned.
0x00000518 ERROR_NULL_LM_PASSWORD	The password is too complex to be converted to a LAN Manager password. The LAN Manager password returned is a null string.
0x00000519 ERROR_UNKNOWN_REVISION	The revision level is unknown.

Win32 error codes	Description
0x0000051A ERROR_REVISION_MISMATCH	Indicates two revision levels are incompatible.
0x0000051B ERROR_INVALID_OWNER	This SID <del>may not</del> cannot be assigned as the owner of this object.
0x0000051C ERROR_INVALID_PRIMARY_GROUP	This SID <del>may not</del> cannot be assigned as the primary group of an object.
0x0000051D ERROR_NO_IMPERSONATION_TOKEN	An attempt has been made to operate on an impersonation token by a thread that is not currently impersonating a client.
0x0000051E ERROR_CANT_DISABLE_MANDATORY	The group <del>may not</del> cannot be disabled.
0x0000051F ERROR_NO_LOGON_SERVERS	There are currently no logon servers available to service the logon request.
0x00000520 ERROR_NO_SUCH_LOGON_SESSION	A specified logon session does not exist. It <del>may</del> might already have been terminated.
0x00000521 ERROR_NO_SUCH_PRIVILEGE	A specified privilege does not exist.
0x00000522 ERROR_PRIVILEGE_NOT_HELD	A required privilege is not held by the client.
0x00000523 ERROR_INVALID_ACCOUNT_NAME	The name provided is not a properly formed account name.
0x00000524 ERROR_USER_EXISTS	The specified account already exists.
0x00000525 ERROR_NO_SUCH_USER	The specified account does not exist.
0x00000526 ERROR_GROUP_EXISTS	The specified group already exists.
0x00000527 ERROR_NO_SUCH_GROUP	The specified group does not exist.
0x00000528 ERROR_MEMBER_IN_GROUP	Either the specified user account is already a member of the specified group, or the specified group cannot be deleted because it contains a member.
0x00000529 ERROR_MEMBER_NOT_IN_GROUP	The specified user account is not a member of the specified group account.
0x0000052A	The last remaining administration account cannot be

<b>Win32 error codes</b>	<b>Description</b>
ERROR_LAST_ADMIN	disabled or deleted.
0x0000052B ERROR_WRONG_PASSWORD	Unable to update the password. The value provided as the current password is incorrect.
0x0000052C ERROR_ILL_FORMED_PASSWORD	Unable to update the password. The value provided for the new password contains values that are not allowed in passwords.
0x0000052D ERROR_PASSWORD_RESTRICTION	Unable to update the password. The value provided for the new password does not meet the length, complexity, or history requirements of the domain.
0x0000052E ERROR_LOGON_FAILURE	Logon failure: Unknown user name or bad password.
0x0000052F ERROR_ACCOUNT_RESTRICTION	Logon failure: User account restriction. Possible reasons are blank passwords not allowed, logon hour restrictions, or a policy restriction has been enforced.
0x00000530 ERROR_INVALID_LOGON_HOURS	Logon failure: Account logon time restriction violation.
0x00000531 ERROR_INVALID_WORKSTATION	Logon failure: User not allowed to log on to this computer.
0x00000532 ERROR_PASSWORD_EXPIRED	Logon failure: The specified account password has expired.
0x00000533 ERROR_ACCOUNT_DISABLED	Logon failure: Account currently disabled.
0x00000534 ERROR_NONE_MAPPED	No mapping between account names and SIDs was done.
0x00000535 ERROR_TOO_MANY_LUIDS_REQUESTED	Too many local user identifiers (LUIDs) were requested at one time.
0x00000536 ERROR_LUIDS_EXHAUSTED	No more LUIDs are available.
0x00000537 ERROR_INVALID_SUB_AUTHORITY	The sub-authority part of an SID is invalid for this particular use.
0x00000538 ERROR_INVALID_ACL	The ACL structure is invalid.
0x00000539 ERROR_INVALID_SID	The SID structure is invalid.
0x0000053A	The security descriptor structure is invalid.

<b>Win32 error codes</b>	<b>Description</b>
ERROR_INVALID_SECURITY_DESCR	
0x0000053C ERROR_BAD_INHERITANCE_ACL	The inherited ACL or ACE could not be built.
0x0000053D ERROR_SERVER_DISABLED	The server is currently disabled.
0x0000053E ERROR_SERVER_NOT_DISABLED	The server is currently enabled.
0x0000053F ERROR_INVALID_ID_AUTHORITY	The value provided was an invalid value for an identifier authority.
0x00000540 ERROR_ALLOTTED_SPACE_EXCEEDED	No more memory is available for security information updates.
0x00000541 ERROR_INVALID_GROUP_ATTRIBUTES	The specified attributes are invalid, or incompatible with the attributes for the group as a whole.
0x00000542 ERROR_BAD_IMPERSONATION_LEVEL	Either a required impersonation level was not provided, or the provided impersonation level is invalid.
0x00000543 ERROR_CANT_OPEN_ANONYMOUS	Cannot open an anonymous level security token.
0x00000544 ERROR_BAD_VALIDATION_CLASS	The validation information class requested was invalid.
0x00000545 ERROR_BAD_TOKEN_TYPE	The type of the token is inappropriate for its attempted use.
0x00000546 ERROR_NO_SECURITY_ON_OBJECT	Unable to perform a security operation on an object that has no associated security.
0x00000547 ERROR_CANT_ACCESS_DOMAIN_INFO	Configuration information could not be read from the domain controller, either because the machine is unavailable, or access has been denied.
0x00000548 ERROR_INVALID_SERVER_STATE	The SAM or local security authority (LSA) server was in the wrong state to perform the security operation.
0x00000549 ERROR_INVALID_DOMAIN_STATE	The domain was in the wrong state to perform the security operation.
0x0000054A ERROR_INVALID_DOMAIN_ROLE	This operation is only allowed for the PDC of the domain.
0x0000054B	The specified domain either does

<b>Win32 error codes</b>	<b>Description</b>
ERROR_NO_SUCH_DOMAIN	not exist or could not be contacted.
0x0000054C ERROR_DOMAIN_EXISTS	The specified domain already exists.
0x0000054D ERROR_DOMAIN_LIMIT_EXCEEDED	An attempt was made to exceed the limit on the number of domains per server.
0x0000054E ERROR_INTERNAL_DB_CORRUPTION	Unable to complete the requested operation because of either a catastrophic media failure or a data structure corruption on the disk.
0x0000054F ERROR_INTERNAL_ERROR	An internal error occurred.
0x00000550 ERROR_GENERIC_NOT_MAPPED	Generic access types were contained in an access mask that should already be mapped to nongeneric types.
0x00000551 ERROR_BAD_DESCRIPTOR_FORMAT	A security descriptor is not in the right format (absolute or self-relative).
0x00000552 ERROR_NOT_LOGON_PROCESS	The requested action is restricted for use by logon processes only. The calling process has not registered as a logon process.
0x00000553 ERROR_LOGON_SESSION_EXISTS	Cannot start a new logon session with an ID that is already in use.
0x00000554 ERROR_NO_SUCH_PACKAGE	A specified authentication package is unknown.
0x00000555 ERROR_BAD_LOGON_SESSION_STATE	The logon session is not in a state that is consistent with the requested operation.
0x00000556 ERROR_LOGON_SESSION_COLLISION	The logon session ID is already in use.
0x00000557 ERROR_INVALID_LOGON_TYPE	A logon request contained an invalid logon type value.
0x00000558 ERROR_CANNOT_IMPERSONATE	Unable to impersonate using a named pipe until data has been read from that pipe.
0x00000559 ERROR_RXACT_INVALID_STATE	The transaction state of a registry subtree is incompatible with the requested operation.
0x0000055A ERROR_RXACT_COMMIT_FAILURE	An internal security database corruption has been encountered.

Win32 error codes	Description
0x0000055B ERROR_SPECIAL_ACCOUNT	Cannot perform this operation on built-in accounts.
0x0000055C ERROR_SPECIAL_GROUP	Cannot perform this operation on this built-in special group.
0x0000055D ERROR_SPECIAL_USER	Cannot perform this operation on this built-in special user.
0x0000055E ERROR_MEMBERS_PRIMARY_GROUP	The user cannot be removed from a group because the group is currently the user's primary group.
0x0000055F ERROR_TOKEN_ALREADY_IN_USE	The token is already in use as a primary token.
0x00000560 ERROR_NO_SUCH_ALIAS	The specified local group does not exist.
0x00000561 ERROR_MEMBER_NOT_IN_ALIAS	The specified account name is not a member of the group.
0x00000562 ERROR_MEMBER_IN_ALIAS	The specified account name is already a member of the group.
0x00000563 ERROR_ALIAS_EXISTS	The specified local group already exists.
0x00000564 ERROR_LOGON_NOT_GRANTED	Logon failure: The user has not been granted the requested logon type at this computer.
0x00000565 ERROR_TOO_MANY_SECRETS	The maximum number of secrets that <del>may</del> <b>can</b> be stored in a single system has been exceeded.
0x00000566 ERROR_SECRET_TOO_LONG	The length of a secret exceeds the maximum length allowed.
0x00000567 ERROR_INTERNAL_DB_ERROR	The local security authority database contains an internal inconsistency.
0x00000568 ERROR_TOO_MANY_CONTEXT_IDS	During a logon attempt, the user's security context accumulated too many SIDs.
0x00000569 ERROR_LOGON_TYPE_NOT_GRANTED	Logon failure: The user has not been granted the requested logon type at this computer.
0x0000056A ERROR_NT_CROSS_ENCRYPTION_REQUIRED	A cross-encrypted password is necessary to change a user password.
0x0000056B ERROR_NO_SUCH_MEMBER	A member could not be added to or removed from the local group because the member does not

<b>Win32 error codes</b>	<b>Description</b>
	exist.
0x0000056C ERROR_INVALID_MEMBER	A new member could not be added to a local group because the member has the wrong account type.
0x0000056D ERROR_TOO_MANY_SIDS	Too many SIDs have been specified.
0x0000056E ERROR_LM_CROSS_ENCRYPTION_REQUIRED	A cross-encrypted password is necessary to change this user password.
0x0000056F ERROR_NO_INHERITANCE	Indicates an ACL contains no inheritable components.
0x00000570 ERROR_FILE_CORRUPT	The file or directory is corrupted and unreadable.
0x00000571 ERROR_DISK_CORRUPT	The disk structure is corrupted and unreadable.
0x00000572 ERROR_NO_USER_SESSION_KEY	There is no user session key for the specified logon session.
0x00000573 ERROR_LICENSE_QUOTA_EXCEEDED	The service being accessed is licensed for a particular number of connections. No more connections can be made to the service at this time because the service has accepted the maximum number of connections.
0x00000574 ERROR_WRONG_TARGET_NAME	Logon failure: The target account name is incorrect.
0x00000575 ERROR_MUTUAL_AUTH_FAILED	Mutual authentication failed. The server's password is out of date at the domain controller.
0x00000576 ERROR_TIME_SKEW	There is a time and/or date difference between the client and server.
0x00000577 ERROR_CURRENT_DOMAIN_NOT_ALLOWED	This operation cannot be performed on the current domain.
0x00000578 ERROR_INVALID_WINDOW_HANDLE	Invalid window handle.
0x00000579 ERROR_INVALID_MENU_HANDLE	Invalid menu handle.
0x0000057A ERROR_INVALID_CURSOR_HANDLE	Invalid cursor handle.
0x0000057B	Invalid accelerator table handle.

<b>Win32 error codes</b>	<b>Description</b>
ERROR_INVALID_ACCEL_HANDLE	
0x0000057C ERROR_INVALID_HOOK_HANDLE	Invalid hook handle.
0x0000057D ERROR_INVALID_DWP_HANDLE	Invalid handle to a multiple-window position structure.
0x0000057E ERROR_TLW_WITH_WSCHILD	Cannot create a top-level child window.
0x0000057F ERROR_CANNOT_FIND_WND_CLASS	Cannot find window class.
0x00000580 ERROR_WINDOW_OF_OTHER_THREAD	Invalid window; it belongs to other thread.
0x00000581 ERROR_HOTKEY_ALREADY_REGISTERED	Hot key is already registered.
0x00000582 ERROR_CLASS_ALREADY_EXISTS	Class already exists.
0x00000583 ERROR_CLASS_DOES_NOT_EXIST	Class does not exist.
0x00000584 ERROR_CLASS_HAS_WINDOWS	Class still has open windows.
0x00000585 ERROR_INVALID_INDEX	Invalid index.
0x00000586 ERROR_INVALID_ICON_HANDLE	Invalid icon handle.
0x00000587 ERROR_PRIVATE_DIALOG_INDEX	Using private DIALOG window words.
0x00000588 ERROR_LISTBOX_ID_NOT_FOUND	The list box identifier was not found.
0x00000589 ERROR_NO_WILDCARD_CHARACTERS	No wildcards were found.
0x0000058A ERROR_CLIPBOARD_NOT_OPEN	Thread does not have a clipboard open.
0x0000058B ERROR_HOTKEY_NOT_REGISTERED	Hot key is not registered.
0x0000058C ERROR_WINDOW_NOT_DIALOG	The window is not a valid dialog window.
0x0000058D ERROR_CONTROL_ID_NOT_FOUND	Control ID not found.
0x0000058E	Invalid message for a combo box because it does not have an edit

<b>Win32 error codes</b>	<b>Description</b>
ERROR_INVALID_COMBOBOX_MESSAGE	control.
0x0000058F ERROR_WINDOW_NOT_COMBOBOX	The window is not a combo box.
0x00000590 ERROR_INVALID_EDIT_HEIGHT	Height must be less than 256.
0x00000591 ERROR_DC_NOT_FOUND	Invalid device context (DC) handle.
0x00000592 ERROR_INVALID_HOOK_FILTER	Invalid hook procedure type.
0x00000593 ERROR_INVALID_FILTER_PROC	Invalid hook procedure.
0x00000594 ERROR_HOOK_NEEDS_HMOD	Cannot set nonlocal hook without a module handle.
0x00000595 ERROR_GLOBAL_ONLY_HOOK	This hook procedure can only be set globally.
0x00000596 ERROR_JOURNAL_HOOK_SET	The journal hook procedure is already installed.
0x00000597 ERROR_HOOK_NOT_INSTALLED	The hook procedure is not installed.
0x00000598 ERROR_INVALID_LB_MESSAGE	Invalid message for single-selection list box.
0x00000599 ERROR_SETCOUNT_ON_BAD_LB	LB_SETCOUNT sent to non-lazy list box.
0x0000059A ERROR_LB_WITHOUT_TABSTOPS	This list box does not support tab stops.
0x0000059B ERROR_DESTROY_OBJECT_OF_OTHER_THREAD	Cannot destroy object created by another thread.
0x0000059C ERROR_CHILD_WINDOW_MENU	Child windows cannot have menus.
0x0000059D ERROR_NO_SYSTEM_MENU	The window does not have a system menu.
0x0000059E ERROR_INVALID_MSGBOX_STYLE	Invalid message box style.
0x0000059F ERROR_INVALID_SPI_VALUE	Invalid system-wide (SPI_*) parameter.
0x000005A0 ERROR_SCREEN_ALREADY_LOCKED	Screen already locked.
0x000005A1	All handles to windows in a multiple-window position

<b>Win32 error codes</b>	<b>Description</b>
ERROR_HWNDS_HAVE_DIFF_PARENT	structure must have the same parent.
0x000005A2 ERROR_NOT_CHILD_WINDOW	The window is not a child window.
0x000005A3 ERROR_INVALID_GW_COMMAND	Invalid GW_* command.
0x000005A4 ERROR_INVALID_THREAD_ID	Invalid thread identifier.
0x000005A5 ERROR_NON_MDICHILD_WINDOW	Cannot process a message from a window that is not a multiple document interface (MDI) window.
0x000005A6 ERROR_POPUP_ALREADY_ACTIVE	Pop-up menu already active.
0x000005A7 ERROR_NO_SCROLLBARS	The window does not have scroll bars.
0x000005A8 ERROR_INVALID_SCROLLBAR_RANGE	Scroll bar range cannot be greater than MAXLONG.
0x000005A9 ERROR_INVALID_SHOWWIN_COMMAND	Cannot show or remove the window in the way specified.
0x000005AA ERROR_NO_SYSTEM_RESOURCES	Insufficient system resources exist to complete the requested service.
0x000005AB ERROR_NONPAGED_SYSTEM_RESOURCES	Insufficient system resources exist to complete the requested service.
0x000005AC ERROR_PAGED_SYSTEM_RESOURCES	Insufficient system resources exist to complete the requested service.
0x000005AD ERROR_WORKING_SET_QUOTA	Insufficient quota to complete the requested service.
0x000005AE ERROR_PAGEFILE_QUOTA	Insufficient quota to complete the requested service.
0x000005AF ERROR_COMMITMENT_LIMIT	The paging file is too small for this operation to complete.
0x000005B0 ERROR_MENU_ITEM_NOT_FOUND	A menu item was not found.
0x000005B1 ERROR_INVALID_KEYBOARD_HANDLE	Invalid keyboard layout handle.
0x000005B2 ERROR_HOOK_TYPE_NOT_ALLOWED	Hook type not allowed.

<b>Win32 error codes</b>	<b>Description</b>
0x000005B3 ERROR_REQUIRES_INTERACTIVE_WINDOWSTATION	This operation requires an interactive window station.
0x000005B4 ERROR_TIMEOUT	This operation returned because the time-out period expired.
0x000005B5 ERROR_INVALID_MONITOR_HANDLE	Invalid monitor handle.
0x000005B6 ERROR_INCORRECT_SIZE	Incorrect size argument.
0x000005B7 ERROR_SYMLINK_CLASS_DISABLED	The symbolic link cannot be followed because its type is disabled.
0x000005B8 ERROR_SYMLINK_NOT_SUPPORTED	This application does not support the current operation on symbolic links.
0x000005DC ERROR_EVENTLOG_FILE_CORRUPT	The event log file is corrupted.
0x000005DD ERROR_EVENTLOG_CANT_START	No event log file could be opened, so the event logging service did not start.
0x000005DE ERROR_LOG_FILE_FULL	The event log file is full.
0x000005DF ERROR_EVENTLOG_FILE_CHANGED	The event log file has changed between read operations.
0x0000060E ERROR_INVALID_TASK_NAME	The specified task name is invalid.
0x0000060F ERROR_INVALID_TASK_INDEX	The specified task index is invalid.
0x00000610 ERROR_THREAD_ALREADY_IN_TASK	The specified thread is already joining a task.
0x00000641 ERROR_INSTALL_SERVICE_FAILURE	The Windows Installer service could not be accessed. This can occur if the Windows Installer is not correctly installed. Contact your support personnel for assistance.
0x00000642 ERROR_INSTALL_USEREXIT	User canceled installation.
0x00000643 ERROR_INSTALL_FAILURE	Fatal error during installation.
0x00000644 ERROR_INSTALL_SUSPEND	Installation suspended, incomplete.
0x00000645	This action is valid only for

<b>Win32 error codes</b>	<b>Description</b>
ERROR_UNKNOWN_PRODUCT	products that are currently installed.
0x00000646 ERROR_UNKNOWN_FEATURE	Feature ID not registered.
0x00000647 ERROR_UNKNOWN_COMPONENT	Component ID not registered.
0x00000648 ERROR_UNKNOWN_PROPERTY	Unknown property.
0x00000649 ERROR_INVALID_HANDLE_STATE	Handle is in an invalid state.
0x0000064A ERROR_BAD_CONFIGURATION	The configuration data for this product is corrupt. Contact your support personnel.
0x0000064B ERROR_INDEX_ABSENT	Component qualifier not present.
0x0000064C ERROR_INSTALL_SOURCE_ABSENT	The installation source for this product is not available. Verify that the source exists and that you can access it.
0x0000064D ERROR_INSTALL_PACKAGE_VERSION	This installation package cannot be installed by the Windows Installer service. You must install a Windows service pack that contains a newer version of the Windows Installer service.
0x0000064E ERROR_PRODUCT_UNINSTALLED	Product is uninstalled.
0x0000064F ERROR_BAD_QUERY_SYNTAX	SQL query syntax invalid or unsupported.
0x00000650 ERROR_INVALID_FIELD	Record field does not exist.
0x00000651 ERROR_DEVICE_REMOVED	The device has been removed.
0x00000652 ERROR_INSTALL_ALREADY_RUNNING	Another installation is already in progress. Complete that installation before proceeding with this install.
0x00000653 ERROR_INSTALL_PACKAGE_OPEN_FAILED	This installation package could not be opened. Verify that the package exists and that you can access it, or contact the application vendor to verify that this is a valid Windows Installer package.
0x00000654	This installation package could

<b>Win32 error codes</b>	<b>Description</b>
ERROR_INSTALL_PACKAGE_INVALID	not be opened. Contact the application vendor to verify that this is a valid Windows Installer package.
0x00000655 ERROR_INSTALL_UI_FAILURE	There was an error starting the Windows Installer service user interface. Contact your support personnel.
0x00000656 ERROR_INSTALL_LOG_FAILURE	Error opening installation log file. Verify that the specified log file location exists and that you can write to it.
0x00000657 ERROR_INSTALL_LANGUAGE_UNSUPPORTED	The language of this installation package is not supported by your system.
0x00000658 ERROR_INSTALL_TRANSFORM_FAILURE	Error applying transforms. Verify that the specified transform paths are valid.
0x00000659 ERROR_INSTALL_PACKAGE_REJECTED	This installation is forbidden by system policy. Contact your system administrator.
0x0000065A ERROR_FUNCTION_NOT_CALLED	Function could not be executed.
0x0000065B ERROR_FUNCTION_FAILED	Function failed during execution.
0x0000065C ERROR_INVALID_TABLE	Invalid or unknown table specified.
0x0000065D ERROR_DATATYPE_MISMATCH	Data supplied is of wrong type.
0x0000065E ERROR_UNSUPPORTED_TYPE	Data of this type is not supported.
0x0000065F ERROR_CREATE_FAILED	The Windows Installer service failed to start. Contact your support personnel.
0x00000660 ERROR_INSTALL_TEMP_UNWRITABLE	The Temp folder is on a drive that is full or is inaccessible. Free up space on the drive or verify that you have write permission on the Temp folder.
0x00000661 ERROR_INSTALL_PLATFORM_UNSUPPORTED	This installation package is not supported by this processor type. Contact your product vendor.
0x00000662 ERROR_INSTALL_NOTUSED	Component not used on this computer.
0x00000663	This update package could not

Win32 error codes	Description
ERROR_PATCH_PACKAGE_OPEN_FAILED	be opened. Verify that the update package exists and that you can access it, or contact the application vendor to verify that this is a valid Windows Installer update package.
0x00000664 ERROR_PATCH_PACKAGE_INVALID	This update package could not be opened. Contact the application vendor to verify that this is a valid Windows Installer update package.
0x00000665 ERROR_PATCH_PACKAGE_UNSUPPORTED	This update package cannot be processed by the Windows Installer service. You must install a Windows service pack that contains a newer version of the Windows Installer service.
0x00000666 ERROR_PRODUCT_VERSION	Another version of this product is already installed. Installation of this version cannot continue. To configure or remove the existing version of this product, use Add/Remove Programs in Control Panel.
0x00000667 ERROR_INVALID_COMMAND_LINE	Invalid command-line argument. Consult the Windows Installer SDK for detailed command line help.
0x00000668 ERROR_INSTALL_REMOTE_DISALLOWED	Only administrators have permission to add, remove, or configure server software during a <b>Terminal Services</b> remote session. If you want to install or configure software on the server, contact your network administrator.
0x00000669 ERROR_SUCCESS_REBOOT_INITIATED	The requested operation completed successfully. The system will be restarted so the changes can take effect.
0x0000066A ERROR_PATCH_TARGET_NOT_FOUND	The upgrade cannot be installed by the Windows Installer service because the program to be upgraded <b>may</b> be missing, or the upgrade <b>may</b> update a different version of the program. Verify that the program to be upgraded exists on your computer and that you have the correct upgrade.
0x0000066B ERROR_PATCH_PACKAGE_REJECTED	The update package is not permitted by a software restriction policy.
0x0000066C	One or more customizations are

<b>Win32 error codes</b>	<b>Description</b>
ERROR_INSTALL_TRANSFORM_REJECTED	not permitted by a software restriction policy.
0x0000066D ERROR_INSTALL_REMOTE_PROHIBITED	The Windows Installer does not permit installation from a Remote Desktop Connection.
0x0000066E ERROR_PATCH_REMOVAL_UNSUPPORTED	Uninstallation of the update package is not supported.
0x0000066F ERROR_UNKNOWN_PATCH	The update is not applied to this product.
0x00000670 ERROR_PATCH_NO_SEQUENCE	No valid sequence could be found for the set of updates.
0x00000671 ERROR_PATCH_REMOVAL_DISALLOWED	Update removal was disallowed by policy.
0x00000672 ERROR_INVALID_PATCH_XML	The XML update data is invalid.
0x00000673 ERROR_PATCH_MANAGED_ADVERTISED_PRODUCT	Windows Installer does not permit updating of managed advertised products. At least one feature of the product must be installed before applying the update.
0x00000674 ERROR_INSTALL_SERVICE_SAFEBOOT	The Windows Installer service is not accessible in Safe Mode. Try again when your computer is not in Safe Mode or you can use System Restore to return your machine to a previous good state.
0x000006A4 RPC_S_INVALID_STRING_BINDING	The string binding is invalid.
0x000006A5 RPC_S_WRONG_KIND_OF_BINDING	The binding handle is not the correct type.
0x000006A6 RPC_S_INVALID_BINDING	The binding handle is invalid.
0x000006A7 RPC_S_PROTSEQ_NOT_SUPPORTED	The RPC protocol sequence is not supported.
0x000006A8 RPC_S_INVALID_RPC_PROTSEQ	The RPC protocol sequence is invalid.
0x000006A9 RPC_S_INVALID_STRING_UUID	The string UUID is invalid.
0x000006AA RPC_S_INVALID_ENDPOINT_FORMAT	The endpoint format is invalid.
0x000006AB	The network address is invalid.

<b>Win32 error codes</b>	<b>Description</b>
RPC_S_INVALID_NET_ADDR	
0x000006AC RPC_S_NO_ENDPOINT_FOUND	No endpoint was found.
0x000006AD RPC_S_INVALID_TIMEOUT	The time-out value is invalid.
0x000006AE RPC_S_OBJECT_NOT_FOUND	The object UUID) was not found.
0x000006AF RPC_S_ALREADY_REGISTERED	The object UUID) has already been registered.
0x000006B0 RPC_S_TYPE_ALREADY_REGISTERED	The type UUID has already been registered.
0x000006B1 RPC_S_ALREADY_LISTENING	The RPC server is already listening.
0x000006B2 RPC_S_NO_PROTSEQS_REGISTERED	No protocol sequences have been registered.
0x000006B3 RPC_S_NOT_LISTENING	The RPC server is not listening.
0x000006B4 RPC_S_UNKNOWN_MGR_TYPE	The manager type is unknown.
0x000006B5 RPC_S_UNKNOWN_IF	The interface is unknown.
0x000006B6 RPC_S_NO_BINDINGS	There are no bindings.
0x000006B7 RPC_S_NO_PROTSEQS	There are no protocol sequences.
0x000006B8 RPC_S_CANT_CREATE_ENDPOINT	The endpoint cannot be created.
0x000006B9 RPC_S_OUT_OF_RESOURCES	Not enough resources are available to complete this operation.
0x000006BA RPC_S_SERVER_UNAVAILABLE	The RPC server is unavailable.
0x000006BB RPC_S_SERVER_TOO_BUSY	The RPC server is too busy to complete this operation.
0x000006BC RPC_S_INVALID_NETWORK_OPTIONS	The network options are invalid.
0x000006BD RPC_S_NO_CALL_ACTIVE	There are no RPCs active on this thread.
0x000006BE	The RPC failed.

<b>Win32 error codes</b>	<b>Description</b>
RPC_S_CALL_FAILED	
0x000006BF RPC_S_CALL_FAILED_DNE	The RPC failed and did not execute.
0x000006C0 RPC_S_PROTOCOL_ERROR	An RPC protocol error occurred.
0x000006C1 RPC_S_PROXY_ACCESS_DENIED	Access to the HTTP proxy is denied.
0x000006C2 RPC_S_UNSUPPORTED_TRANS_SYN	The transfer syntax is not supported by the RPC server.
0x000006C4 RPC_S_UNSUPPORTED_TYPE	The UUID type is not supported.
0x000006C5 RPC_S_INVALID_TAG	The tag is invalid.
0x000006C6 RPC_S_INVALID_BOUND	The array bounds are invalid.
0x000006C7 RPC_S_NO_ENTRY_NAME	The binding does not contain an entry name.
0x000006C8 RPC_S_INVALID_NAME_SYNTAX	The name syntax is invalid.
0x000006C9 RPC_S_UNSUPPORTED_NAME_SYNTAX	The name syntax is not supported.
0x000006CB RPC_S_UUID_NO_ADDRESS	No network address is available to use to construct a UUID.
0x000006CC RPC_S_DUPLICATE_ENDPOINT	The endpoint is a duplicate.
0x000006CD RPC_S_UNKNOWN_AUTHN_TYPE	The authentication type is unknown.
0x000006CE RPC_S_MAX_CALLS_TOO_SMALL	The maximum number of calls is too small.
0x000006CF RPC_S_STRING_TOO_LONG	The string is too long.
0x000006D0 RPC_S_PROTSEQ_NOT_FOUND	The RPC protocol sequence was not found.
0x000006D1 RPC_S_PROCNUM_OUT_OF_RANGE	The procedure number is out of range.
0x000006D2 RPC_S_BINDING_HAS_NO_AUTH	The binding does not contain any authentication information.
0x000006D3	The authentication service is

<b>Win32 error codes</b>	<b>Description</b>
RPC_S_UNKNOWN_AUTHN_SERVICE	unknown.
0x000006D4 RPC_S_UNKNOWN_AUTHN_LEVEL	The authentication level is unknown.
0x000006D5 RPC_S_INVALID_AUTH_IDENTITY	The security context is invalid.
0x000006D6 RPC_S_UNKNOWN_AUTHZ_SERVICE	The authorization service is unknown.
0x000006D7 EPT_S_INVALID_ENTRY	The entry is invalid.
0x000006D8 EPT_S_CANT_PERFORM_OP	The server endpoint cannot perform the operation.
0x000006D9 EPT_S_NOT_REGISTERED	There are no more endpoints available from the endpoint mapper.
0x000006DA RPC_S_NOTHING_TO_EXPORT	No interfaces have been exported.
0x000006DB RPC_S_INCOMPLETE_NAME	The entry name is incomplete.
0x000006DC RPC_S_INVALID_VERS_OPTION	The version option is invalid.
0x000006DD RPC_S_NO_MORE_MEMBERS	There are no more members.
0x000006DE RPC_S_NOT_ALL_OBJS_UNEXPORTED	There is nothing to unexport.
0x000006DF RPC_S_INTERFACE_NOT_FOUND	The interface was not found.
0x000006E0 RPC_S_ENTRY_ALREADY_EXISTS	The entry already exists.
0x000006E1 RPC_S_ENTRY_NOT_FOUND	The entry is not found.
0x000006E2 RPC_S_NAME_SERVICE_UNAVAILABLE	The name service is unavailable.
0x000006E3 RPC_S_INVALID_NAF_ID	The network address family is invalid.
0x000006E4 RPC_S_CANNOT_SUPPORT	The requested operation is not supported.
0x000006E5 RPC_S_NO_CONTEXT_AVAILABLE	No security context is available to allow impersonation.
0x000006E6	An internal error occurred in an

Win32 error codes	Description
RPC_S_INTERNAL_ERROR	RPC.
0x000006E7 RPC_S_ZERO_DIVIDE	The RPC server attempted an integer division by zero.
0x000006E8 RPC_S_ADDRESS_ERROR	An addressing error occurred in the RPC server.
0x000006E9 RPC_S_FP_DIV_ZERO	A floating-point operation at the RPC server caused a division by zero.
0x000006EA RPC_S_FP_UNDERFLOW	A floating-point underflow occurred at the RPC server.
0x000006EB RPC_S_FP_OVERFLOW	A floating-point overflow occurred at the RPC server.
0x000006EC RPC_X_NO_MORE_ENTRIES	The list of RPC servers available for the binding of auto handles has been exhausted.
0x000006ED RPC_X_SS_CHAR_TRANS_OPEN_FAIL	Unable to open the character translation table file.
0x000006EE RPC_X_SS_CHAR_TRANS_SHORT_FILE	The file containing the character translation table has fewer than 512 bytes.
0x000006EF RPC_X_SS_IN_NULL_CONTEXT	A null context handle was passed from the client to the host during an RPC.
0x000006F1 RPC_X_SS_CONTEXT_DAMAGED	The context handle changed during an RPC.
0x000006F2 RPC_X_SS_HANDLES_MISMATCH	The binding handles passed to an RPC do not match.
0x000006F3 RPC_X_SS_CANNOT_GET_CALL_HANDLE	The stub is unable to get the RPC handle.
0x000006F4 RPC_X_NULL_REF_POINTER	A null reference pointer was passed to the stub.
0x000006F5 RPC_X_ENUM_VALUE_OUT_OF_RANGE	The enumeration value is out of range.
0x000006F6 RPC_X_BYTE_COUNT_TOO_SMALL	The byte count is too small.
0x000006F7 RPC_X_BAD_STUB_DATA	The stub received bad data.
0x000006F8 ERROR_INVALID_USER_BUFFER	The supplied user buffer is not valid for the requested operation.
0x000006F9	The disk media is not recognized. It <b>may</b> not be

<b>Win32 error codes</b>	<b>Description</b>
ERROR_UNRECOGNIZED_MEDIA	formatted.
0x000006FA ERROR_NO_TRUST_LSA_SECRET	The workstation does not have a trust secret.
0x000006FB ERROR_NO_TRUST_SAM_ACCOUNT	The security database on the server does not have a computer account for this workstation trust relationship.
0x000006FC ERROR_TRUSTED_DOMAIN_FAILURE	The trust relationship between the primary domain and the trusted domain failed.
0x000006FD ERROR_TRUSTED_RELATIONSHIP_FAILURE	The trust relationship between this workstation and the primary domain failed.
0x000006FE ERROR_TRUST_FAILURE	The network logon failed.
0x000006FF RPC_S_CALL_IN_PROGRESS	An RPC is already in progress for this thread.
0x00000700 ERROR_NETLOGON_NOT_STARTED	An attempt was made to log on, but the network logon service was not started.
0x00000701 ERROR_ACCOUNT_EXPIRED	The user's account has expired.
0x00000702 ERROR_REDIRECTOR_HAS_OPEN_HANDLES	The redirector is in use and cannot be unloaded.
0x00000703 ERROR_PRINTER_DRIVER_ALREADY_INSTALLED	The specified printer driver is already installed.
0x00000704 ERROR_UNKNOWN_PORT	The specified port is unknown.
0x00000705 ERROR_UNKNOWN_PRINTER_DRIVER	The printer driver is unknown.
0x00000706 ERROR_UNKNOWN_PRINTPROCESSOR	The print processor is unknown.
0x00000707 ERROR_INVALID_SEPARATOR_FILE	The specified separator file is invalid.
0x00000708 ERROR_INVALID_PRIORITY	The specified priority is invalid.
0x00000709 ERROR_INVALID_PRINTER_NAME	The printer name is invalid.
0x0000070A ERROR_PRINTER_ALREADY_EXISTS	The printer already exists.
0x0000070B	The printer command is invalid.

<b>Win32 error codes</b>	<b>Description</b>
ERROR_INVALID_PRINTER_COMMAND	
0x0000070C ERROR_INVALID_DATATYPE	The specified data type is invalid.
0x0000070D ERROR_INVALID_ENVIRONMENT	The environment specified is invalid.
0x0000070E RPC_S_NO_MORE_BINDINGS	There are no more bindings.
0x0000070F ERROR_NOLOGON_INTERDOMAIN_TRUST_ACCOUNT	The account used is an interdomain trust account. Use your global user account or local user account to access this server.
0x00000710 ERROR_NOLOGON_WORKSTATION_TRUST_ACCOUNT	The account used is a computer account. Use your global user account or local user account to access this server.
0x00000711 ERROR_NOLOGON_SERVER_TRUST_ACCOUNT	The account used is a server trust account. Use your global user account or local user account to access this server.
0x00000712 ERROR_DOMAIN_TRUST_INCONSISTENT	The name or SID of the domain specified is inconsistent with the trust information for that domain.
0x00000713 ERROR_SERVER_HAS_OPEN_HANDLES	The server is in use and cannot be unloaded.
0x00000714 ERROR_RESOURCE_DATA_NOT_FOUND	The specified image file did not contain a resource section.
0x00000715 ERROR_RESOURCE_TYPE_NOT_FOUND	The specified resource type cannot be found in the image file.
0x00000716 ERROR_RESOURCE_NAME_NOT_FOUND	The specified resource name cannot be found in the image file.
0x00000717 ERROR_RESOURCE_LANG_NOT_FOUND	The specified resource language ID cannot be found in the image file.
0x00000718 ERROR_NOT_ENOUGH_QUOTA	Not enough quota is available to process this command.
0x00000719 RPC_S_NO_INTERFACES	No interfaces have been registered.
0x0000071A RPC_S_CALL_CANCELLED	The RPC was canceled.
0x0000071B	The binding handle does not contain all the required

<b>Win32 error codes</b>	<b>Description</b>
RPC_S_BINDING_INCOMPLETE	information.
0x0000071C RPC_S_COMM_FAILURE	A communications failure occurred during an RPC.
0x0000071D RPC_S_UNSUPPORTED_AUTHN_LEVEL	The requested authentication level is not supported.
0x0000071E RPC_S_NO_PRINC_NAME	No principal name is registered.
0x0000071F RPC_S_NOT_RPC_ERROR	The error specified is not a valid Windows RPC error code.
0x00000720 RPC_S_UUID_LOCAL_ONLY	A UUID that is valid only on this computer has been allocated.
0x00000721 RPC_S_SEC_PKG_ERROR	A security package-specific error occurred.
0x00000722 RPC_S_NOT_CANCELLED	The thread is not canceled.
0x00000723 RPC_X_INVALID_ES_ACTION	Invalid operation on the encoding/decoding handle.
0x00000724 RPC_X_WRONG_ES_VERSION	Incompatible version of the serializing package.
0x00000725 RPC_X_WRONG_STUB_VERSION	Incompatible version of the RPC stub.
0x00000726 RPC_X_INVALID_PIPE_OBJECT	The RPC pipe object is invalid or corrupted.
0x00000727 RPC_X_WRONG_PIPE_ORDER	An invalid operation was attempted on an RPC pipe object.
0x00000728 RPC_X_WRONG_PIPE_VERSION	Unsupported RPC pipe version.
0x0000076A RPC_S_GROUP_MEMBER_NOT_FOUND	The group member was not found.
0x0000076B EPT_S_CANT_CREATE	The endpoint mapper database entry could not be created.
0x0000076C RPC_S_INVALID_OBJECT	The object UUID is the nil UUID.
0x0000076D ERROR_INVALID_TIME	The specified time is invalid.
0x0000076E ERROR_INVALID_FORM_NAME	The specified form name is invalid.
0x0000076F	The specified form size is invalid.

Win32 error codes	Description
ERROR_INVALID_FORM_SIZE	
0x00000770 ERROR_ALREADY_WAITING	The specified printer handle is already being waited on.
0x00000771 ERROR_PRINTER_DELETED	The specified printer has been deleted.
0x00000772 ERROR_INVALID_PRINTER_STATE	The state of the printer is invalid.
0x00000773 ERROR_PASSWORD_MUST_CHANGE	The user's password must be changed before logging on the first time.
0x00000774 ERROR_DOMAIN_CONTROLLER_NOT_FOUND	Could not find the domain controller for this domain.
0x00000775 ERROR_ACCOUNT_LOCKED_OUT	The referenced account is currently locked out and <del>not</del> <b>may</b> <del>cannot</del> be logged on to.
0x00000776 OR_INVALID_OXID	The object exporter specified was not found.
0x00000777 OR_INVALID_OID	The object specified was not found.
0x00000778 OR_INVALID_SET	The object set specified was not found.
0x00000779 RPC_S_SEND_INCOMPLETE	Some data remains to be sent in the request buffer.
0x0000077A RPC_S_INVALID_ASYNC_HANDLE	Invalid asynchronous RPC handle.
0x0000077B RPC_S_INVALID_ASYNC_CALL	Invalid asynchronous RPC call handle for this operation.
0x0000077C RPC_X_PIPE_CLOSED	The RPC pipe object has already been closed.
0x0000077D RPC_X_PIPE_DISCIPLINE_ERROR	The RPC call completed before all pipes were processed.
0x0000077E RPC_X_PIPE_EMPTY	No more data is available from the RPC pipe.
0x0000077F ERROR_NO_SITENAME	No site name is available for this machine.
0x00000780 ERROR_CANT_ACCESS_FILE	The file cannot be accessed by the system.
0x00000781 ERROR_CANT_RESOLVE_FILENAME	The name of the file cannot be resolved by the system.

<b>Win32 error codes</b>	<b>Description</b>
0x00000782 RPC_S_ENTRY_TYPE_MISMATCH	The entry is not of the expected type.
0x00000783 RPC_S_NOT_ALL_OBJS_EXPORTED	Not all object UUIDs could be exported to the specified entry.
0x00000784 RPC_S_INTERFACE_NOT_EXPORTED	The interface could not be exported to the specified entry.
0x00000785 RPC_S_PROFILE_NOT_ADDED	The specified profile entry could not be added.
0x00000786 RPC_S_PRF_ELT_NOT_ADDED	The specified profile element could not be added.
0x00000787 RPC_S_PRF_ELT_NOT_REMOVED	The specified profile element could not be removed.
0x00000788 RPC_S_GRP_ELT_NOT_ADDED	The group element could not be added.
0x00000789 RPC_S_GRP_ELT_NOT_REMOVED	The group element could not be removed.
0x0000078A ERROR_KM_DRIVER_BLOCKED	The printer driver is not compatible with a policy enabled on your computer that blocks Windows NT 4.0 operating system drivers.
0x0000078B ERROR_CONTEXT_EXPIRED	The context has expired and can no longer be used.
0x0000078C ERROR_PER_USER_TRUST_QUOTA_EXCEEDED	The current user's delegated trust creation quota has been exceeded.
0x0000078D ERROR_ALL_USER_TRUST_QUOTA_EXCEEDED	The total delegated trust creation quota has been exceeded.
0x0000078E ERROR_USER_DELETE_TRUST_QUOTA_EXCEEDED	The current user's delegated trust deletion quota has been exceeded.
0x0000078F ERROR_AUTHENTICATION_FIREWALL_FAILED	Logon failure: The machine you are logging on to is protected by an authentication firewall. The specified account is not allowed to authenticate to the machine.
0x00000790 ERROR_REMOTE_PRINT_CONNECTIONS_BLOCKED	Remote connections to the Print Spooler are blocked by a policy set on your machine.
0x000007D0 ERROR_INVALID_PIXEL_FORMAT	The pixel format is invalid.
0x000007D1	The specified driver is invalid.

<b>Win32 error codes</b>	<b>Description</b>
ERROR_BAD_DRIVER	
0x000007D2 ERROR_INVALID_WINDOW_STYLE	The window style or class attribute is invalid for this operation.
0x000007D3 ERROR_METAFILE_NOT_SUPPORTED	The requested metafile operation is not supported.
0x000007D4 ERROR_TRANSFORM_NOT_SUPPORTED	The requested transformation operation is not supported.
0x000007D5 ERROR_CLIPPING_NOT_SUPPORTED	The requested clipping operation is not supported.
0x000007DA ERROR_INVALID_CMM	The specified color management module is invalid.
0x000007DB ERROR_INVALID_PROFILE	The specified color profile is invalid.
0x000007DC ERROR_TAG_NOT_FOUND	The specified tag was not found.
0x000007DD ERROR_TAG_NOT_PRESENT	A required tag is not present.
0x000007DE ERROR_DUPLICATE_TAG	The specified tag is already present.
0x000007DF ERROR_PROFILE_NOT_ASSOCIATED_WITH_DEVICE	The specified color profile is not associated with any device.
0x000007E0 ERROR_PROFILE_NOT_FOUND	The specified color profile was not found.
0x000007E1 ERROR_INVALID_COLORSPACE	The specified color space is invalid.
0x000007E2 ERROR_ICM_NOT_ENABLED	Image Color Management is not enabled.
0x000007E3 ERROR_DELETING_ICM_XFORM	There was an error while deleting the color transform.
0x000007E4 ERROR_INVALID_TRANSFORM	The specified color transform is invalid.
0x000007E5 ERROR_COLORSPACE_MISMATCH	The specified transform does not match the bitmap's color space.
0x000007E6 ERROR_INVALID_COLORINDEX	The specified named color index is not present in the profile.
0x000007E7 ERROR_PROFILE_DOES_NOT_MATCH_DEVICE	The specified profile is intended for a device of a different type than the specified device.

<b>Win32 error codes</b>	<b>Description</b>
0x00000836 NERR_NetNotStarted	The workstation driver is not installed.
0x00000837 NERR_UnknownServer	The server could not be located.
0x00000838 NERR_ShareMem	An internal error occurred. The network cannot access a shared memory segment.
0x00000839 NERR_NoNetworkResource	A network resource shortage occurred.
0x0000083A NERR_RemoteOnly	This operation is not supported on workstations.
0x0000083B NERR_DevNotRedirected	The device is not connected.
0x0000083C ERROR_CONNECTED_OTHER_PASSWORD	The network connection was made successfully, but the user had to be prompted for a password other than the one originally specified.
0x0000083D ERROR_CONNECTED_OTHER_PASSWORD_DEFAULT	The network connection was made successfully using default credentials.
0x00000842 NERR_ServerNotStarted	The Server service is not started.
0x00000843 NERR_ItemNotFound	The queue is empty.
0x00000844 NERR_UnknownDevDir	The device or directory does not exist.
0x00000845 NERR_RedirectedPath	The operation is invalid on a redirected resource.
0x00000846 NERR_DuplicateShare	The name has already been shared.
0x00000847 NERR_NoRoom	The server is currently out of the requested resource.
0x00000849 NERR_TooManyItems	Requested addition of items exceeds the maximum allowed.
0x0000084A NERR_InvalidMaxUsers	The Peer service supports only two simultaneous users.
0x0000084B NERR_BufTooSmall	The API return buffer is too small.
0x0000084F NERR_RemoteErr	A remote API error occurred.

<b>Win32 error codes</b>	<b>Description</b>
0x00000853 NERR_LanmanIniError	An error occurred when opening or reading the configuration file.
0x00000858 NERR_NetworkError	A general network error occurred.
0x00000859 NERR_WkstaInconsistentState	The Workstation service is in an inconsistent state. Restart the computer before restarting the Workstation service.
0x0000085A NERR_WkstaNotStarted	The Workstation service has not been started.
0x0000085B NERR_BrowserNotStarted	The requested information is not available.
0x0000085C NERR_InternalError	An internal error occurred.
0x0000085D NERR_BadTransactConfig	The server is not configured for transactions.
0x0000085E NERR_InvalidAPI	The requested API is not supported on the remote server.
0x0000085F NERR_BadEventName	The event name is invalid.
0x00000860 NERR_DupNameReboot	The computer name already exists on the network. Change it and reboot the computer.
0x00000862 NERR_CfgCompNotFound	The specified component could not be found in the configuration information.
0x00000863 NERR_CfgParamNotFound	The specified parameter could not be found in the configuration information.
0x00000865 NERR_LineTooLong	A line in the configuration file is too long.
0x00000866 NERR_QNotFound	The printer does not exist.
0x00000867 NERR_JobNotFound	The print job does not exist.
0x00000868 NERR_DestNotFound	The printer destination cannot be found.
0x00000869 NERR_DestExists	The printer destination already exists.
0x0000086A NERR_QExists	The print queue already exists.

<b>Win32 error codes</b>	<b>Description</b>
0x0000086B NERR_QNoRoom	No more printers can be added.
0x0000086C NERR_JobNoRoom	No more print jobs can be added.
0x0000086D NERR_DestNoRoom	No more printer destinations can be added.
0x0000086E NERR_DestIdle	This printer destination is idle and cannot accept control operations.
0x0000086F NERR_DestInvalidOp	This printer destination request contains an invalid control function.
0x00000870 NERR_ProcNoRespond	The print processor is not responding.
0x00000871 NERR_SpoolerNotLoaded	The spooler is not running.
0x00000872 NERR_DestInvalidState	This operation cannot be performed on the print destination in its current state.
0x00000873 NERR_QinvalidState	This operation cannot be performed on the print queue in its current state.
0x00000874 NERR_JobInvalidState	This operation cannot be performed on the print job in its current state.
0x00000875 NERR_SpoolNoMemory	A spooler memory allocation failure occurred.
0x00000876 NERR_DriverNotFound	The device driver does not exist.
0x00000877 NERR_DataTypeInvalid	The data type is not supported by the print processor.
0x00000878 NERR_ProcNotFound	The print processor is not installed.
0x00000884 NERR_ServiceTableLocked	The service database is locked.
0x00000885 NERR_ServiceTableFull	The service table is full.
0x00000886 NERR_ServiceInstalled	The requested service has already been started.
0x00000887 NERR_ServiceEntryLocked	The service does not respond to control actions.

<b>Win32 error codes</b>	<b>Description</b>
0x00000888 NERR_ServiceNotInstalled	The service has not been started.
0x00000889 NERR_BadServiceName	The service name is invalid.
0x0000088A NERR_ServiceCtlTimeout	The service is not responding to the control function.
0x0000088B NERR_ServiceCtlBusy	The service control is busy.
0x0000088C NERR_BadServiceProgName	The configuration file contains an invalid service program name.
0x0000088D NERR_ServiceNotCtrl	The service could not be controlled in its present state.
0x0000088E NERR_ServiceKillProc	The service ended abnormally.
0x0000088F NERR_ServiceCtlNotValid	The requested pause or stop is not valid for this service.
0x00000890 NERR_NotInDispatchTbl	The service control dispatcher could not find the service name in the dispatch table.
0x00000891 NERR_BadControlRecv	The service control dispatcher pipe read failed.
0x00000892 NERR_ServiceNotStarting	A thread for the new service could not be created.
0x00000898 NERR_AlreadyLoggedOn	This workstation is already logged on to the LAN.
0x00000899 NERR_NotLoggedOn	The workstation is not logged on to the LAN.
0x0000089A NERR_BadUsername	The user name or group name parameter is invalid.
0x0000089B NERR_BadPassword	The password parameter is invalid.
0x0000089C NERR_UnableToAddName_W	The logon processor did not add the message alias.
0x0000089D NERR_UnableToAddName_F	The logon processor did not add the message alias.
0x0000089E NERR_UnableToDelName_W	@W The logoff processor did not delete the message alias.
0x0000089F NERR_UnableToDelName_F	The logoff processor did not delete the message alias.

<b>Win32 error codes</b>	<b>Description</b>
0x000008A1 NERR_LogonsPaused	Network logons are paused.
0x000008A2 NERR_LogonServerConflict	A centralized logon server conflict occurred.
0x000008A3 NERR_LogonNoUserPath	The server is configured without a valid user path.
0x000008A4 NERR_LogonScriptError	An error occurred while loading or running the logon script.
0x000008A6 NERR_StandaloneLogon	The logon server was not specified. The computer will be logged on as STANDALONE.
0x000008A7 NERR_LogonServerNotFound	The logon server could not be found.
0x000008A8 NERR_LogonDomainExists	There is already a logon domain for this computer.
0x000008A9 NERR_NonValidatedLogon	The logon server could not validate the logon.
0x000008AB NERR_ACFNotFound	The security database could not be found.
0x000008AC NERR_GroupNotFound	The group name could not be found.
0x000008AD NERR_UserNotFound	The user name could not be found.
0x000008AE NERR_ResourceNotFound	The resource name could not be found.
0x000008AF NERR_GroupExists	The group already exists.
0x000008B0 NERR_UserExists	The user account already exists.
0x000008B1 NERR_ResourceExists	The resource permission list already exists.
0x000008B2 NERR_NotPrimary	This operation is allowed only on the PDC of the domain.
0x000008B3 NERR_ACFNotLoaded	The security database has not been started.
0x000008B4 NERR_ACFNoRoom	There are too many names in the user accounts database.
0x000008B5 NERR_ACFFileIOFail	A disk I/O failure occurred.

<b>Win32 error codes</b>	<b>Description</b>
0x000008B6 NERR_ACFTooManyLists	The limit of 64 entries per resource was exceeded.
0x000008B7 NERR_UserLogon	Deleting a user with a session is not allowed.
0x000008B8 NERR_ACFNoParent	The parent directory could not be located.
0x000008B9 NERR_CanNotGrowSegment	Unable to add to the security database session cache segment.
0x000008BA NERR_SpeGroupOp	This operation is not allowed on this special group.
0x000008BB NERR_NotInCache	This user is not cached in the user accounts database session cache.
0x000008BC NERR_UserInGroup	The user already belongs to this group.
0x000008BD NERR_UserNotInGroup	The user does not belong to this group.
0x000008BE NERR_AccountUndefined	This user account is undefined.
0x000008BF NERR_AccountExpired	This user account has expired.
0x000008C0 NERR_InvalidWorkstation	The user is not allowed to log on from this workstation.
0x000008C1 NERR_InvalidLogonHours	The user is not allowed to log on at this time.
0x000008C2 NERR_PasswordExpired	The password of this user has expired.
0x000008C3 NERR_PasswordCantChange	The password of this user cannot change.
0x000008C4 NERR_PasswordHistConflict	This password cannot be used now.
0x000008C5 NERR_PasswordTooShort	The password does not meet the password policy requirements. Check the minimum password length, password complexity, and password history requirements.
0x000008C6 NERR_PasswordTooRecent	The password of this user is too recent to change.
0x000008C7	The security database is

<b>Win32 error codes</b>	<b>Description</b>
NERR_InvalidDatabase	corrupted.
0x000008C8 NERR_DatabaseUpToDate	No updates are necessary to this replicant network or local security database.
0x000008C9 NERR_SyncRequired	This replicant database is outdated; synchronization is required.
0x000008CA NERR_UseNotFound	The network connection could not be found.
0x000008CB NERR_BadAsgType	This asg_type is invalid.
0x000008CC NERR_DeviceIsShared	This device is currently being shared.
0x000008DE NERR_NoComputerName	The computer name could not be added as a message alias. The name <b>may</b> might already exist on the network.
0x000008DF NERR_MsgAlreadyStarted	The Messenger service is already started.
0x000008E0 NERR_MsgInitFailed	The Messenger service failed to start.
0x000008E1 NERR_NameNotFound	The message alias could not be found on the network.
0x000008E2 NERR_AlreadyForwarded	This message alias has already been forwarded.
0x000008E3 NERR_AddForwarded	This message alias has been added but is still forwarded.
0x000008E4 NERR_AlreadyExists	This message alias already exists locally.
0x000008E5 NERR_TooManyNames	The maximum number of added message aliases has been exceeded.
0x000008E6 NERR_DelComputerName	The computer name could not be deleted.
0x000008E7 NERR_LocalForward	Messages cannot be forwarded back to the same workstation.
0x000008E8 NERR_GrpMsgProcessor	An error occurred in the domain message processor.
0x000008E9 NERR_PausedRemote	The message was sent, but the recipient has paused the Messenger service.

<b>Win32 error codes</b>	<b>Description</b>
0x000008EA NERR_BadReceive	The message was sent but not received.
0x000008EB NERR_NameInUse	The message alias is currently in use. Try again later.
0x000008EC NERR_MsgNotStarted	The Messenger service has not been started.
0x000008ED NERR_NotLocalName	The name is not on the local computer.
0x000008EE NERR_NoForwardName	The forwarded message alias could not be found on the network.
0x000008EF NERR_RemoteFull	The message alias table on the remote station is full.
0x000008F0 NERR_NameNotForwarded	Messages for this alias are not currently being forwarded.
0x000008F1 NERR_TruncatedBroadcast	The broadcast message was truncated.
0x000008F6 NERR_InvalidDevice	This is an invalid device name.
0x000008F7 NERR_WriteFault	A write fault occurred.
0x000008F9 NERR_DuplicateName	A duplicate message alias exists on the network.
0x000008FA NERR_DeleteLater	This message alias will be deleted later.
0x000008FB NERR_IncompleteDel	The message alias was not successfully deleted from all networks.
0x000008FC NERR_MultipleNets	This operation is not supported on computers with multiple networks.
0x00000906 NERR_NetNameNotFound	This shared resource does not exist.
0x00000907 NERR_DeviceNotShared	This device is not shared.
0x00000908 NERR_ClientNameNotFound	A session does not exist with that computer name.
0x0000090A NERR_FileIdNotFound	There is not an open file with that identification number.
0x0000090B	A failure occurred when

<b>Win32 error codes</b>	<b>Description</b>
NERR_ExecFailure	executing a remote administration command.
0x0000090C NERR_TmpFile	A failure occurred when opening a remote temporary file.
0x0000090D NERR_TooMuchData	The data returned from a remote administration command has been truncated to 64 KB.
0x0000090E NERR_DeviceShareConflict	This device cannot be shared as both a spooled and a nonspooled resource.
0x0000090F NERR_BrowserTableIncomplete	The information in the list of servers <b>may</b> be incorrect.
0x00000910 NERR_NotLocalDomain	The computer is not active in this domain.
0x00000911 NERR_IsDfsShare	The share must be removed from the Distributed File System (DFS) before it can be deleted.
0x0000091B NERR_DevInvalidOpCode	The operation is invalid for this device.
0x0000091C NERR_DevNotFound	This device cannot be shared.
0x0000091D NERR_DevNotOpen	This device was not open.
0x0000091E NERR_BadQueueDevString	This device name list is invalid.
0x0000091F NERR_BadQueuePriority	The queue priority is invalid.
0x00000921 NERR_NoCommDevs	There are no shared communication devices.
0x00000922 NERR_QueueNotFound	The queue you specified does not exist.
0x00000924 NERR_BadDevString	This list of devices is invalid.
0x00000925 NERR_BadDev	The requested device is invalid.
0x00000926 NERR_InUseBySpooler	This device is already in use by the spooler.
0x00000927 NERR_CommDevInUse	This device is already in use as a communication device.
0x0000092F	This computer name is invalid.

<b>Win32 error codes</b>	<b>Description</b>
NERR_InvalidComputer	
0x00000932 NERR_MaxLenExceeded	The string and prefix specified are too long.
0x00000934 NERR_BadComponent	This path component is invalid.
0x00000935 NERR_CantType	Could not determine the type of input.
0x0000093A NERR_TooManyEntries	The buffer for types is not big enough.
0x00000942 NERR_ProfileFileTooBig	Profile files cannot exceed 64 KB.
0x00000943 NERR_ProfileOffset	The start offset is out of range.
0x00000944 NERR_ProfileCleanup	The system cannot delete current connections to network resources.
0x00000945 NERR_ProfileUnknownCmd	The system was unable to parse the command line in this file.
0x00000946 NERR_ProfileLoadErr	An error occurred while loading the profile file.
0x00000947 NERR_ProfileSaveErr	Errors occurred while saving the profile file. The profile was partially saved.
0x00000949 NERR_LogOverflow	Log file %1 is full.
0x0000094A NERR_LogFileChanged	This log file has changed between reads.
0x0000094B NERR_LogFileCorrupt	Log file %1 is corrupt.
0x0000094C NERR_SourceIsDir	The source path cannot be a directory.
0x0000094D NERR_BadSource	The source path is illegal.
0x0000094E NERR_BadDest	The destination path is illegal.
0x0000094F NERR_DifferentServers	The source and destination paths are on different servers.
0x00000951 NERR_RunSrvPaused	The Run server you requested is paused.

<b>Win32 error codes</b>	<b>Description</b>
0x00000955 NERR_ErrCommRunSrv	An error occurred when communicating with a Run server.
0x00000957 NERR_ErrorExeGhst	An error occurred when starting a background process.
0x00000958 NERR_ShareNotFound	The shared resource you are connected to could not be found.
0x00000960 NERR_InvalidLana	The LAN adapter number is invalid.
0x00000961 NERR_OpenFiles	There are open files on the connection.
0x00000962 NERR_ActiveConns	Active connections still exist.
0x00000963 NERR_BadPasswordCore	This share name or password is invalid.
0x00000964 NERR_DevInUse	The device is being accessed by an active process.
0x00000965 NERR_LocalDrive	The drive letter is in use locally.
0x0000097E NERR_AlertExists	The specified client is already registered for the specified event.
0x0000097F NERR_TooManyAlerts	The alert table is full.
0x00000980 NERR_NoSuchAlert	An invalid or nonexistent alert name was raised.
0x00000981 NERR_BadRecipient	The alert recipient is invalid.
0x00000982 NERR_AcctLimitExceeded	A user's session with this server has been deleted.
0x00000988 NERR_InvalidLogSeek	The log file does not contain the requested record number.
0x00000992 NERR_BadUasConfig	The user accounts database is not configured correctly.
0x00000993 NERR_InvalidUASOp	This operation is not permitted when the Net Logon service is running.
0x00000994 NERR_LastAdmin	This operation is not allowed on the last administrative account.
0x00000995	Could not find the domain

<b>Win32 error codes</b>	<b>Description</b>
NERR_DCNotFound	controller for this domain.
0x00000996 NERR_LogonTrackingError	Could not set logon information for this user.
0x00000997 NERR_NetlogonNotStarted	The Net Logon service has not been started.
0x00000998 NERR_CanNotGrowUASFile	Unable to add to the user accounts database.
0x00000999 NERR_TimeDiffAtDC	This server's clock is not synchronized with the PDC's clock.
0x0000099A NERR_PasswordMismatch	A password mismatch has been detected.
0x0000099C NERR_NoSuchServer	The server identification does not specify a valid server.
0x0000099D NERR_NoSuchSession	The session identification does not specify a valid session.
0x0000099E NERR_NoSuchConnection	The connection identification does not specify a valid connection.
0x0000099F NERR_TooManyServers	There is no space for another entry in the table of available servers.
0x000009A0 NERR_TooManySessions	The server has reached the maximum number of sessions it supports.
0x000009A1 NERR_TooManyConnections	The server has reached the maximum number of connections it supports.
0x000009A2 NERR_TooManyFiles	The server cannot open more files because it has reached its maximum number.
0x000009A3 NERR_NoAlternateServers	There are no alternate servers registered on this server.
0x000009A6 NERR_TryDownLevel	Try the down-level (remote admin protocol) version of API instead.
0x000009B0 NERR_UPSDriverNotStarted	The uninterruptible power supply (UPS) driver could not be accessed by the UPS service.
0x000009B1 NERR_UPSInvalidConfig	The UPS service is not configured correctly.
0x000009B2 NERR_UPSInvalidCommPort	The UPS service could not access the specified Comm Port.

<b>Win32 error codes</b>	<b>Description</b>
0x000009B3 NERR_UPSSignalAsserted	The UPS indicated a line fail or low battery situation. Service not started.
0x000009B4 NERR_UPSShutdownFailed	The UPS service failed to perform a system shut down.
0x000009C4 NERR_BadDosRetCode	The program below returned an MS-DOS error code.
0x000009C5 NERR_ProgNeedsExtraMem	The program below needs more memory.
0x000009C6 NERR_BadDosFunction	The program below called an unsupported MS-DOS function.
0x000009C7 NERR_RemoteBootFailed	The workstation failed to boot.
0x000009C8 NERR_BadFileChecksum	The file below is corrupt.
0x000009C9 NERR_NoRplBootSystem	No loader is specified in the boot-block definition file.
0x000009CA NERR_RplLoadrNetBiosErr	NetBIOS returned an error: The network control blocks (NCBs) and Server Message Block (SMB) are dumped above.
0x000009CB NERR_RplLoadrDiskErr	A disk I/O error occurred.
0x000009CC NERR_ImageParamErr	Image parameter substitution failed.
0x000009CD NERR_TooManyImageParams	Too many image parameters cross disk sector boundaries.
0x000009CE NERR_NonDosFloppyUsed	The image was not generated from an MS-DOS disk formatted with /S.
0x000009CF NERR_RplBootRestart	Remote boot will be restarted later.
0x000009D0 NERR_RplSrvrCallFailed	The call to the Remoteboot server failed.
0x000009D1 NERR_CantConnectRplSrvr	Cannot connect to the Remoteboot server.
0x000009D2 NERR_CantOpenImageFile	Cannot open image file on the Remoteboot server.
0x000009D3 NERR_CallingRplSrvr	Connecting to the Remoteboot server.

<b>Win32 error codes</b>	<b>Description</b>
0x000009D4 NERR_StartingRplBoot	Connecting to the Remoteboot server.
0x000009D5 NERR_RplBootServiceTerm	Remote boot service was stopped, check the error log for the cause of the problem.
0x000009D6 NERR_RplBootStartFailed	Remote boot startup failed; check the error log for the cause of the problem.
0x000009D7 NERR_RPL_CONNECTED	A second connection to a Remoteboot resource is not allowed.
0x000009F6 NERR_BrowserConfiguredToNotRun	The browser service was configured with MaintainServerList=No.
0x00000A32 NERR_RplNoAdaptersStarted	Service failed to start because none of the network adapters started with this service.
0x00000A33 NERR_RplBadRegistry	Service failed to start due to bad startup information in the registry.
0x00000A34 NERR_RplBadDatabase	Service failed to start because its database is absent or corrupt.
0x00000A35 NERR_RplRplfilesShare	Service failed to start because the RPLFILES share is absent.
0x00000A36 NERR_RplNotRplServer	Service failed to start because the RPLUSER group is absent.
0x00000A37 NERR_RplCannotEnum	Cannot enumerate service records.
0x00000A38 NERR_RplWkstaInfoCorrupted	Workstation record information has been corrupted.
0x00000A39 NERR_RplWkstaNotFound	Workstation record was not found.
0x00000A3A NERR_RplWkstaNameUnavailable	Workstation name is in use by some other workstation.
0x00000A3B NERR_RplProfileInfoCorrupted	Profile record information has been corrupted.
0x00000A3C NERR_RplProfileNotFound	Profile record was not found.
0x00000A3D NERR_RplProfileNameUnavailable	Profile name is in use by some other profile.
0x00000A3E NERR_RplProfileNotEmpty	There are workstations using this profile.

<b>Win32 error codes</b>	<b>Description</b>
0x00000A3F NERR_RplConfigInfoCorrupted	Configuration record information has been corrupted.
0x00000A40 NERR_RplConfigNotFound	Configuration record was not found.
0x00000A41 NERR_RplAdapterInfoCorrupted	Adapter ID record information has been corrupted.
0x00000A42 NERR_RplInternal	An internal service error has occurred.
0x00000A43 NERR_RplVendorInfoCorrupted	Vendor ID record information has been corrupted.
0x00000A44 NERR_RplBootInfoCorrupted	Boot block record information has been corrupted.
0x00000A45 NERR_RplWkstaNeedsUserAcct	The user account for this workstation record is missing.
0x00000A46 NERR_RplNeedsRPLUSERAcct	The RPLUSER local group could not be found.
0x00000A47 NERR_RplBootNotFound	Boot block record was not found.
0x00000A48 NERR_RplIncompatibleProfile	Chosen profile is incompatible with this workstation.
0x00000A49 NERR_RplAdapterNameUnavailable	Chosen network adapter ID is in use by some other workstation.
0x00000A4A NERR_RplConfigNotEmpty	There are profiles using this configuration.
0x00000A4B NERR_RplBootInUse	There are workstations, profiles, or configurations using this boot block.
0x00000A4C NERR_RplBackupDatabase	Service failed to back up the Remoteboot database.
0x00000A4D NERR_RplAdapterNotFound	Adapter record was not found.
0x00000A4E NERR_RplVendorNotFound	Vendor record was not found.
0x00000A4F NERR_RplVendorNameUnavailable	Vendor name is in use by some other vendor record.
0x00000A50 NERR_RplBootNameUnavailable	The boot name or vendor ID is in use by some other boot block record.
0x00000A51	The configuration name is in use by some other configuration.

<b>Win32 error codes</b>	<b>Description</b>
NERR_RplConfigNameUnavailable	
0x00000A64 NERR_DfsInternalCorruption	The internal database maintained by the DFS service is corrupt.
0x00000A65 NERR_DfsVolumeDataCorrupt	One of the records in the internal DFS database is corrupt.
0x00000A66 NERR_DfsNoSuchVolume	There is no DFS name whose entry path matches the input entry path.
0x00000A67 NERR_DfsVolumeAlreadyExists	A root or link with the given name already exists.
0x00000A68 NERR_DfsAlreadyShared	The server share specified is already shared in the DFS.
0x00000A69 NERR_DfsNoSuchShare	The indicated server share does not support the indicated DFS namespace.
0x00000A6A NERR_DfsNotALeafVolume	The operation is not valid in this portion of the namespace.
0x00000A6B NERR_DfsLeafVolume	The operation is not valid in this portion of the namespace.
0x00000A6C NERR_DfsVolumeHasMultipleServers	The operation is ambiguous because the link has multiple servers.
0x00000A6D NERR_DfsCantCreateJunctionPoint	Unable to create a link.
0x00000A6E NERR_DfsServerNotDfsAware	The server is not DFS-aware.
0x00000A6F NERR_DfsBadRenamePath	The specified rename target path is invalid.
0x00000A70 NERR_DfsVolumeIsOffline	The specified DFS link is offline.
0x00000A71 NERR_DfsNoSuchServer	The specified server is not a server for this link.
0x00000A72 NERR_DfsCyclicalName	A cycle in the DFS name was detected.
0x00000A73 NERR_DfsNotSupportedInServerDfs	The operation is not supported on a server-based DFS.
0x00000A74 NERR_DfsDuplicateService	This link is already supported by the specified server share.
0x00000A75 NERR_DfsCantRemoveLastServerShare	Cannot remove the last server share supporting this root or

<b>Win32 error codes</b>	<b>Description</b>
	link.
0x00000A76 NERR_DfsVolumeIsInterDfs	The operation is not supported for an inter-DFS link.
0x00000A77 NERR_DfsInconsistent	The internal state of the DFS Service has become inconsistent.
0x00000A78 NERR_DfsServerUpgraded	The DFS Service has been installed on the specified server.
0x00000A79 NERR_DfsDataIsIdentical	The DFS data being reconciled is identical.
0x00000A7A NERR_DfsCantRemoveDfsRoot	The DFS root cannot be deleted. Uninstall DFS if required.
0x00000A7B NERR_DfsChildOrParentInDfs	A child or parent directory of the share is already in a DFS.
0x00000A82 NERR_DfsInternalError	DFS internal error.
0x00000A83 NERR_SetupAlreadyJoined	This machine is already joined to a domain.
0x00000A84 NERR_SetupNotJoined	This machine is not currently joined to a domain.
0x00000A85 NERR_SetupDomainController	This machine is a domain controller and cannot be unjoined from a domain.
0x00000A86 NERR_DefaultJoinRequired	The destination domain controller does not support creating machine accounts in organizational units (OUs).
0x00000A87 NERR_InvalidWorkgroupName	The specified workgroup name is invalid.
0x00000A88 NERR_NameUsesIncompatibleCodePage	The specified computer name is incompatible with the default language used on the domain controller.
0x00000A89 NERR_ComputerAccountNotFound	The specified computer account could not be found.
0x00000A8A NERR_PersonalSku	This version of Windows cannot be joined to a domain.
0x00000A8D NERR_PasswordMustChange	The password must change at the next logon.
0x00000A8E NERR_AccountLockedOut	The account is locked out.
0x00000A8F	The password is too long.

<b>Win32 error codes</b>	<b>Description</b>
NERR_PasswordTooLong	
0x00000A90 NERR_PasswordNotComplexEnough	The password does not meet the complexity policy.
0x00000A91 NERR_PasswordFilterError	The password does not meet the requirements of the password filter DLLs.
0x00000BB8 ERROR_UNKNOWN_PRINT_MONITOR	The specified print monitor is unknown.
0x00000BB9 ERROR_PRINTER_DRIVER_IN_USE	The specified printer driver is currently in use.
0x00000BBA ERROR_SPOOL_FILE_NOT_FOUND	The spool file was not found.
0x00000BBB ERROR_SPL_NO_STARTDOC	A StartDocPrinter call was not issued.
0x00000BBC ERROR_SPL_NO_ADDJOB	An AddJob call was not issued.
0x00000BBD ERROR_PRINT_PROCESSOR_ALREADY_INSTALLED	The specified print processor has already been installed.
0x00000BBE ERROR_PRINT_MONITOR_ALREADY_INSTALLED	The specified print monitor has already been installed.
0x00000BBF ERROR_INVALID_PRINT_MONITOR	The specified print monitor does not have the required functions.
0x00000BC0 ERROR_PRINT_MONITOR_IN_USE	The specified print monitor is currently in use.
0x00000BC1 ERROR_PRINTER_HAS_JOBS_QUEUED	The requested operation is not allowed when there are jobs queued to the printer.
0x00000BC2 ERROR_SUCCESS_REBOOT_REQUIRED	The requested operation is successful. Changes will not be effective until the system is rebooted.
0x00000BC3 ERROR_SUCCESS_RESTART_REQUIRED	The requested operation is successful. Changes will not be effective until the service is restarted.
0x00000BC4 ERROR_PRINTER_NOT_FOUND	No printers were found.
0x00000BC5 ERROR_PRINTER_DRIVER_WARNED	The printer driver is known to be unreliable.
0x00000BC6 ERROR_PRINTER_DRIVER_BLOCKED	The printer driver is known to harm the system.

<b>Win32 error codes</b>	<b>Description</b>
0x0000BC7 ERROR_PRINTER_DRIVER_PACKAGE_IN_USE	The specified printer driver package is currently in use.
0x0000BC8 ERROR_CORE_DRIVER_PACKAGE_NOT_FOUND	Unable to find a core driver package that is required by the printer driver package.
0x0000BC9 ERROR_FAIL_REBOOT_REQUIRED	The requested operation failed. A system reboot is required to roll back changes made.
0x0000BCA ERROR_FAIL_REBOOT_INITIATED	The requested operation failed. A system reboot has been initiated to roll back changes made.
0x0000F6E ERROR_IO_REISSUE_AS_CACHED	Reissue the given operation as a cached I/O operation.
0x0000FA0 ERROR_WINS_INTERNAL	Windows Internet Name Service (WINS) encountered an error while processing the command.
0x0000FA1 ERROR_CAN_NOT_DEL_LOCAL_WINS	The local WINS cannot be deleted.
0x0000FA2 ERROR_STATIC_INIT	The importation from the file failed.
0x0000FA3 ERROR_INC_BACKUP	The backup failed. Was a full backup done before?
0x0000FA4 ERROR_FULL_BACKUP	The backup failed. Check the directory to which you are backing the database.
0x0000FA5 ERROR_REC_NON_EXISTENT	The name does not exist in the WINS database.
0x0000FA6 ERROR_RPL_NOT_ALLOWED	Replication with a nonconfigured partner is not allowed.
0x0000FD2 PEERDIST_ERROR_CONTENTINFO_VERSION_UNSUPPORTED	The version of the supplied content information is not supported.
0x0000FD3 PEERDIST_ERROR_CANNOT_PARSE_CONTENTINFO	The supplied content information is malformed.
0x0000FD4 PEERDIST_ERROR_MISSING_DATA	The requested data cannot be found in local or peer caches.
0x0000FD5 PEERDIST_ERROR_NO_MORE	No more data is available or required.
0x0000FD6 PEERDIST_ERROR_NOT_INITIALIZED	The supplied object has not been initialized.
0x0000FD7 PEERDIST_ERROR_ALREADY_INITIALIZED	The supplied object has already been initialized.

<b>Win32 error codes</b>	<b>Description</b>
0x0000FD8 PEERDIST_ERROR_SHUTDOWN_IN_PROGRESS	A shutdown operation is already in progress.
0x0000FD9 PEERDIST_ERROR_INVALIDATED	The supplied object has already been invalidated.
0x0000FDA PEERDIST_ERROR_ALREADY_EXISTS	An element already exists and was not replaced.
0x0000FDB PEERDIST_ERROR_OPERATION_NOTFOUND	Cannot cancel the requested operation as it has already been completed.
0x0000FDC PEERDIST_ERROR_ALREADY_COMPLETED	Cannot perform the requested operation because it has already been carried out.
0x0000FDD PEERDIST_ERROR_OUT_OF_BOUNDS	An operation accessed data beyond the bounds of valid data.
0x0000FDE PEERDIST_ERROR_VERSION_UNSUPPORTED	The requested version is not supported.
0x0000FDF PEERDIST_ERROR_INVALID_CONFIGURATION	A configuration value is invalid.
0x0000FE0 PEERDIST_ERROR_NOT_LICENSED	The SKU is not licensed.
0x0000FE1 PEERDIST_ERROR_SERVICE_UNAVAILABLE	PeerDist Service is still initializing and will be available shortly.
0x00001004 ERROR_DHCP_ADDRESS_CONFLICT	The Dynamic Host Configuration Protocol (DHCP) client has obtained an IP address that is already in use on the network. The local interface will be disabled until the DHCP client can obtain a new address.
0x00001068 ERROR_WMI_GUID_NOT_FOUND	The GUID passed was not recognized as valid by a WMI data provider.
0x00001069 ERROR_WMI_INSTANCE_NOT_FOUND	The instance name passed was not recognized as valid by a WMI data provider.
0x0000106A ERROR_WMI_ITEMID_NOT_FOUND	The data item ID passed was not recognized as valid by a WMI data provider.
0x0000106B ERROR_WMI_TRY_AGAIN	The WMI request could not be completed and should be retried.
0x0000106C ERROR_WMI_DP_NOT_FOUND	The WMI data provider could not be located.
0x0000106D	The WMI data provider

<b>Win32 error codes</b>	<b>Description</b>
ERROR_WMI_UNRESOLVED_INSTANCE_REF	references an instance set that has not been registered.
0x0000106E ERROR_WMI_ALREADY_ENABLED	The WMI data block or event notification has already been enabled.
0x0000106F ERROR_WMI_GUID_DISCONNECTED	The WMI data block is no longer available.
0x00001070 ERROR_WMI_SERVER_UNAVAILABLE	The WMI data service is not available.
0x00001071 ERROR_WMI_DP_FAILED	The WMI data provider failed to carry out the request.
0x00001072 ERROR_WMI_INVALID_MOF	The WMI Managed Object Format (MOF) information is not valid.
0x00001073 ERROR_WMI_INVALID_REGINFO	The WMI registration information is not valid.
0x00001074 ERROR_WMI_ALREADY_DISABLED	The WMI data block or event notification has already been disabled.
0x00001075 ERROR_WMI_READ_ONLY	The WMI data item or data block is read-only.
0x00001076 ERROR_WMI_SET_FAILURE	The WMI data item or data block could not be changed.
0x000010CC ERROR_INVALID_MEDIA	The media identifier does not represent a valid medium.
0x000010CD ERROR_INVALID_LIBRARY	The library identifier does not represent a valid library.
0x000010CE ERROR_INVALID_MEDIA_POOL	The media pool identifier does not represent a valid media pool.
0x000010CF ERROR_DRIVE_MEDIA_MISMATCH	The drive and medium are not compatible, or they exist in different libraries.
0x000010D0 ERROR_MEDIA_OFFLINE	The medium currently exists in an offline library and must be online to perform this operation.
0x000010D1 ERROR_LIBRARY_OFFLINE	The operation cannot be performed on an offline library.
0x000010D2 ERROR_EMPTY	The library, drive, or media pool is empty.
0x000010D3 ERROR_NOT_EMPTY	The library, drive, or media pool must be empty to perform this operation.

<b>Win32 error codes</b>	<b>Description</b>
0x000010D4 ERROR_MEDIA_UNAVAILABLE	No media is currently available in this media pool or library.
0x000010D5 ERROR_RESOURCE_DISABLED	A resource required for this operation is disabled.
0x000010D6 ERROR_INVALID_CLEANER	The media identifier does not represent a valid cleaner.
0x000010D7 ERROR_UNABLE_TO_CLEAN	The drive cannot be cleaned or does not support cleaning.
0x000010D8 ERROR_OBJECT_NOT_FOUND	The object identifier does not represent a valid object.
0x000010D9 ERROR_DATABASE_FAILURE	Unable to read from or write to the database.
0x000010DA ERROR_DATABASE_FULL	The database is full.
0x000010DB ERROR_MEDIA_INCOMPATIBLE	The medium is not compatible with the device or media pool.
0x000010DC ERROR_RESOURCE_NOT_PRESENT	The resource required for this operation does not exist.
0x000010DD ERROR_INVALID_OPERATION	The operation identifier is not valid.
0x000010DE ERROR_MEDIA_NOT_AVAILABLE	The media is not mounted or ready for use.
0x000010DF ERROR_DEVICE_NOT_AVAILABLE	The device is not ready for use.
0x000010E0 ERROR_REQUEST_REFUSED	The operator or administrator has refused the request.
0x000010E1 ERROR_INVALID_DRIVE_OBJECT	The drive identifier does not represent a valid drive.
0x000010E2 ERROR_LIBRARY_FULL	Library is full. No slot is available for use.
0x000010E3 ERROR_MEDIUM_NOT_ACCESSIBLE	The transport cannot access the medium.
0x000010E4 ERROR_UNABLE_TO_LOAD_MEDIUM	Unable to load the medium into the drive.
0x000010E5 ERROR_UNABLE_TO_INVENTORY_DRIVE	Unable to retrieve the drive status.
0x000010E6 ERROR_UNABLE_TO_INVENTORY_SLOT	Unable to retrieve the slot status.

<b>Win32 error codes</b>	<b>Description</b>
0x000010E7 ERROR_UNABLE_TO_INVENTORY_TRANSPORT	Unable to retrieve status about the transport.
0x000010E8 ERROR_TRANSPORT_FULL	Cannot use the transport because it is already in use.
0x000010E9 ERROR_CONTROLLING_IEPORT	Unable to open or close the inject/eject port.
0x000010EA ERROR_UNABLE_TO_EJECT_MOUNTED_MEDIA	Unable to eject the medium because it is in a drive.
0x000010EB ERROR_CLEANER_SLOT_SET	A cleaner slot is already reserved.
0x000010EC ERROR_CLEANER_SLOT_NOT_SET	A cleaner slot is not reserved.
0x000010ED ERROR_CLEANER_CARTRIDGE_SPENT	The cleaner cartridge has performed the maximum number of drive cleanings.
0x000010EE ERROR_UNEXPECTED_OMID	Unexpected on-medium identifier.
0x000010EF ERROR_CANT_DELETE_LAST_ITEM	The last remaining item in this group or resource cannot be deleted.
0x000010F0 ERROR_MESSAGE_EXCEEDS_MAX_SIZE	The message provided exceeds the maximum size allowed for this parameter.
0x000010F1 ERROR_VOLUME_CONTAINS_SYS_FILES	The volume contains system or paging files.
0x000010F2 ERROR_INDIGENOUS_TYPE	The media type cannot be removed from this library because at least one drive in the library reports it can support this media type.
0x000010F3 ERROR_NO_SUPPORTING_DRIVES	This offline media cannot be mounted on this system because no enabled drives are present that can be used.
0x000010F4 ERROR_CLEANER_CARTRIDGE_INSTALLED	A cleaner cartridge is present in the tape library.
0x000010F5 ERROR_IEPORT_FULL	Cannot use the IEport because it is not empty.
0x000010FE ERROR_FILE_OFFLINE	The remote storage service was not able to recall the file.
0x000010FF ERROR_REMOTE_STORAGE_NOT_ACTIVE	The remote storage service is not operational at this time.

<b>Win32 error codes</b>	<b>Description</b>
0x00001100 ERROR_REMOTE_STORAGE_MEDIA_ERROR	The remote storage service encountered a media error.
0x00001126 ERROR_NOT_A_REPARSE_POINT	The file or directory is not a reparse point.
0x00001127 ERROR_REPARSE_ATTRIBUTE_CONFLICT	The reparse point attribute cannot be set because it conflicts with an existing attribute.
0x00001128 ERROR_INVALID_REPARSE_DATA	The data present in the reparse point buffer is invalid.
0x00001129 ERROR_REPARSE_TAG_INVALID	The tag present in the reparse point buffer is invalid.
0x0000112A ERROR_REPARSE_TAG_MISMATCH	There is a mismatch between the tag specified in the request and the tag present in the reparse point.
0x00001194 ERROR_VOLUME_NOT_SIS_ENABLED	Single Instance Storage (SIS) is not available on this volume.
0x00001389 ERROR_DEPENDENT_RESOURCE_EXISTS	The operation cannot be completed because other resources depend on this resource.
0x0000138A ERROR_DEPENDENCY_NOT_FOUND	The cluster resource dependency cannot be found.
0x0000138B ERROR_DEPENDENCY_ALREADY_EXISTS	The cluster resource cannot be made dependent on the specified resource because it is already dependent.
0x0000138C ERROR_RESOURCE_NOT_ONLINE	The cluster resource is not online.
0x0000138D ERROR_HOST_NODE_NOT_AVAILABLE	A cluster node is not available for this operation.
0x0000138E ERROR_RESOURCE_NOT_AVAILABLE	The cluster resource is not available.
0x0000138F ERROR_RESOURCE_NOT_FOUND	The cluster resource could not be found.
0x00001390 ERROR_SHUTDOWN_CLUSTER	The cluster is being shut down.
0x00001391 ERROR_CANT_EVICT_ACTIVE_NODE	A cluster node cannot be evicted from the cluster unless the node is down or it is the last node.
0x00001392 ERROR_OBJECT_ALREADY_EXISTS	The object already exists.

<b>Win32 error codes</b>	<b>Description</b>
0x00001393 ERROR_OBJECT_IN_LIST	The object is already in the list.
0x00001394 ERROR_GROUP_NOT_AVAILABLE	The cluster group is not available for any new requests.
0x00001395 ERROR_GROUP_NOT_FOUND	The cluster group could not be found.
0x00001396 ERROR_GROUP_NOT_ONLINE	The operation could not be completed because the cluster group is not online.
0x00001397 ERROR_HOST_NODE_NOT_RESOURCE_OWNER	The operation failed because either the specified cluster node is not the owner of the resource, or the node is not a possible owner of the resource.
0x00001398 ERROR_HOST_NODE_NOT_GROUP_OWNER	The operation failed because either the specified cluster node is not the owner of the group, or the node is not a possible owner of the group.
0x00001399 ERROR_RESMON_CREATE_FAILED	The cluster resource could not be created in the specified resource monitor.
0x0000139A ERROR_RESMON_ONLINE_FAILED	The cluster resource could not be brought online by the resource monitor.
0x0000139B ERROR_RESOURCE_ONLINE	The operation could not be completed because the cluster resource is online.
0x0000139C ERROR_QUORUM_RESOURCE	The cluster resource could not be deleted or brought offline because it is the quorum resource.
0x0000139D ERROR_NOT_QUORUM_CAPABLE	The cluster could not make the specified resource a quorum resource because it is not capable of being a quorum resource.
0x0000139E ERROR_CLUSTER_SHUTTING_DOWN	The cluster software is shutting down.
0x0000139F ERROR_INVALID_STATE	The group or resource is not in the correct state to perform the requested operation.
0x000013A0 ERROR_RESOURCE_PROPERTIES_STORED	The properties were stored but not all changes will take effect until the next time the resource is brought online.
0x000013A1	The cluster could not make the specified resource a quorum

<b>Win32 error codes</b>	<b>Description</b>
ERROR_NOT_QUORUM_CLASS	resource because it does not belong to a shared storage class.
0x000013A2 ERROR_CORE_RESOURCE	The cluster resource could not be deleted because it is a core resource.
0x000013A3 ERROR_QUORUM_RESOURCE_ONLINE_FAILED	The quorum resource failed to come online.
0x000013A4 ERROR_QUORUMLOG_OPEN_FAILED	The quorum log could not be created or mounted successfully.
0x000013A5 ERROR_CLUSTERLOG_CORRUPT	The cluster log is corrupt.
0x000013A6 ERROR_CLUSTERLOG_RECORD_EXCEEDS_MAXSIZE	The record could not be written to the cluster log because it exceeds the maximum size.
0x000013A7 ERROR_CLUSTERLOG_EXCEEDS_MAXSIZE	The cluster log exceeds its maximum size.
0x000013A8 ERROR_CLUSTERLOG_CHKPOINT_NOT_FOUND	No checkpoint record was found in the cluster log.
0x000013A9 ERROR_CLUSTERLOG_NOT_ENOUGH_SPACE	The minimum required disk space needed for logging is not available.
0x000013AA ERROR_QUORUM_OWNER_ALIVE	The cluster node failed to take control of the quorum resource because the resource is owned by another active node.
0x000013AB ERROR_NETWORK_NOT_AVAILABLE	A cluster network is not available for this operation.
0x000013AC ERROR_NODE_NOT_AVAILABLE	A cluster node is not available for this operation.
0x000013AD ERROR_ALL_NODES_NOT_AVAILABLE	All cluster nodes must be running to perform this operation.
0x000013AE ERROR_RESOURCE_FAILED	A cluster resource failed.
0x000013AF ERROR_CLUSTER_INVALID_NODE	The cluster node is not valid.
0x000013B0 ERROR_CLUSTER_NODE_EXISTS	The cluster node already exists.
0x000013B1 ERROR_CLUSTER_JOIN_IN_PROGRESS	A node is in the process of joining the cluster.
0x000013B2 ERROR_CLUSTER_NODE_NOT_FOUND	The cluster node was not found.

<b>Win32 error codes</b>	<b>Description</b>
0x000013B3 ERROR_CLUSTER_LOCAL_NODE_NOT_FOUND	The cluster local node information was not found.
0x000013B4 ERROR_CLUSTER_NETWORK_EXISTS	The cluster network already exists.
0x000013B5 ERROR_CLUSTER_NETWORK_NOT_FOUND	The cluster network was not found.
0x000013B6 ERROR_CLUSTER_NETINTERFACE_EXISTS	The cluster network interface already exists.
0x000013B7 ERROR_CLUSTER_NETINTERFACE_NOT_FOUND	The cluster network interface was not found.
0x000013B8 ERROR_CLUSTER_INVALID_REQUEST	The cluster request is not valid for this object.
0x000013B9 ERROR_CLUSTER_INVALID_NETWORK_PROVIDER	The cluster network provider is not valid.
0x000013BA ERROR_CLUSTER_NODE_DOWN	The cluster node is down.
0x000013BB ERROR_CLUSTER_NODE_UNREACHABLE	The cluster node is not reachable.
0x000013BC ERROR_CLUSTER_NODE_NOT_MEMBER	The cluster node is not a member of the cluster.
0x000013BD ERROR_CLUSTER_JOIN_NOT_IN_PROGRESS	A cluster join operation is not in progress.
0x000013BE ERROR_CLUSTER_INVALID_NETWORK	The cluster network is not valid.
0x000013C0 ERROR_CLUSTER_NODE_UP	The cluster node is up.
0x000013C1 ERROR_CLUSTER_IPADDR_IN_USE	The cluster IP address is already in use.
0x000013C2 ERROR_CLUSTER_NODE_NOT_PAUSED	The cluster node is not paused.
0x000013C3 ERROR_CLUSTER_NO_SECURITY_CONTEXT	No cluster security context is available.
0x000013C4 ERROR_CLUSTER_NETWORK_NOT_INTERNAL	The cluster network is not configured for internal cluster communication.
0x000013C5 ERROR_CLUSTER_NODE_ALREADY_UP	The cluster node is already up.
0x000013C6 ERROR_CLUSTER_NODE_ALREADY_DOWN	The cluster node is already down.

Win32 error codes	Description
0x000013C7 ERROR_CLUSTER_NETWORK_ALREADY_ONLINE	The cluster network is already online.
0x000013C8 ERROR_CLUSTER_NETWORK_ALREADY_OFFLINE	The cluster network is already offline.
0x000013C9 ERROR_CLUSTER_NODE_ALREADY_MEMBER	The cluster node is already a member of the cluster.
0x000013CA ERROR_CLUSTER_LAST_INTERNAL_NETWORK	The cluster network is the only one configured for internal cluster communication between two or more active cluster nodes. The internal communication capability cannot be removed from the network.
0x000013CB ERROR_CLUSTER_NETWORK_HAS_DEPENDENTS	One or more cluster resources depend on the network to provide service to clients. The client access capability cannot be removed from the network.
0x000013CC ERROR_INVALID_OPERATION_ON_QUORUM	This operation cannot be performed on the cluster resource because it is the quorum resource. <del>You may not bring the</del> This quorum resource cannot be brought offline or modify and its possible owners list cannot be modified.
0x000013CD ERROR_DEPENDENCY_NOT_ALLOWED	The cluster quorum resource is not allowed to have any dependencies.
0x000013CE ERROR_CLUSTER_NODE_PAUSED	The cluster node is paused.
0x000013CF ERROR_NODE_CANT_HOST_RESOURCE	The cluster resource cannot be brought online. The owner node cannot run this resource.
0x000013D0 ERROR_CLUSTER_NODE_NOT_READY	The cluster node is not ready to perform the requested operation.
0x000013D1 ERROR_CLUSTER_NODE_SHUTTING_DOWN	The cluster node is shutting down.
0x000013D2 ERROR_CLUSTER_JOIN_ABORTED	The cluster join operation was aborted.
0x000013D3 ERROR_CLUSTER_INCOMPATIBLE_VERSIONS	The cluster join operation failed due to incompatible software versions between the joining node and its sponsor.
0x000013D4 ERROR_CLUSTER_MAXNUM_OF_RESOURCES_EXCEEDED	This resource cannot be created because the cluster has reached the limit on the number of

Win32 error codes	Description
	resources it can monitor.
0x000013D5 ERROR_CLUSTER_SYSTEM_CONFIG_CHANGED	The system configuration changed during the cluster join or form operation. The join or form operation was aborted.
0x000013D6 ERROR_CLUSTER_RESOURCE_TYPE_NOT_FOUND	The specified resource type was not found.
0x000013D7 ERROR_CLUSTER_RESTYPE_NOT_SUPPORTED	The specified node does not support a resource of this type. This <b>maymight</b> be due to version inconsistencies or due to the absence of the resource DLL on this node.
0x000013D8 ERROR_CLUSTER_RESNAME_NOT_FOUND	The specified resource name is not supported by this resource DLL. This <b>maymight</b> be due to a bad (or changed) name supplied to the resource DLL.
0x000013D9 ERROR_CLUSTER_NO_RPC_PACKAGES_REGISTERED	No authentication package could be registered with the RPC server.
0x000013DA ERROR_CLUSTER_OWNER_NOT_IN_PREFLIST	You cannot bring the group online because the owner of the group is not in the preferred list for the group. To change the owner node for the group, move the group.
0x000013DB ERROR_CLUSTER_DATABASE_SEQMISMATCH	The join operation failed because the cluster database sequence number has changed or is incompatible with the locker node. This <b>maycan</b> happen during a join operation if the cluster database was changing during the join.
0x000013DC ERROR_RESMON_INVALID_STATE	The resource monitor will not allow the fail operation to be performed while the resource is in its current state. This <b>maycan</b> happen if the resource is in a pending state.
0x000013DD ERROR_CLUSTER_GUM_NOT_LOCKER	A non-locker code received a request to reserve the lock for making global updates.
0x000013DE ERROR_QUORUM_DISK_NOT_FOUND	The quorum disk could not be located by the cluster service.
0x000013DF ERROR_DATABASE_BACKUP_CORRUPT	The backed-up cluster database is possibly corrupt.
0x000013E0 ERROR_CLUSTER_NODE_ALREADY_HAS_DFS_ROOT	A DFS root already exists in this cluster node.

<b>Win32 error codes</b>	<b>Description</b>
0x000013E1 ERROR_RESOURCE_PROPERTY_UNCHANGEABLE	An attempt to modify a resource property failed because it conflicts with another existing property.
0x00001702 ERROR_CLUSTER_MEMBERSHIP_INVALID_STATE	An operation was attempted that is incompatible with the current membership state of the node.
0x00001703 ERROR_CLUSTER_QUORUMLOG_NOT_FOUND	The quorum resource does not contain the quorum log.
0x00001704 ERROR_CLUSTER_MEMBERSHIP_HALT	The membership engine requested shutdown of the cluster service on this node.
0x00001705 ERROR_CLUSTER_INSTANCE_ID_MISMATCH	The join operation failed because the cluster instance ID of the joining node does not match the cluster instance ID of the sponsor node.
0x00001706 ERROR_CLUSTER_NETWORK_NOT_FOUND_FOR_IP	A matching cluster network for the specified IP address could not be found.
0x00001707 ERROR_CLUSTER_PROPERTY_DATA_TYPE_MISMATCH	The actual data type of the property did not match the expected data type of the property.
0x00001708 ERROR_CLUSTER_EVICT_WITHOUT_CLEANUP	The cluster node was evicted from the cluster successfully, but the node was not cleaned up. To determine what clean-up steps failed and how to recover, see the Failover Clustering application event log using Event Viewer.
0x00001709 ERROR_CLUSTER_PARAMETER_MISMATCH	Two or more parameter values specified for a resource's properties are in conflict.
0x0000170A ERROR_NODE_CANNOT_BE_CLUSTERED	This computer cannot be made a member of a cluster.
0x0000170B ERROR_CLUSTER_WRONG_OS_VERSION	This computer cannot be made a member of a cluster because it does not have the correct version of Windows installed.
0x0000170C ERROR_CLUSTER_CANT_CREATE_DUP_CLUSTER_NAME	A cluster cannot be created with the specified cluster name because that cluster name is already in use. Specify a different name for the cluster.
0x0000170D ERROR_CLUSTER_CFG_ALREADY_COMMITTED	The cluster configuration action has already been committed.
0x0000170E	The cluster configuration action

<b>Win32 error codes</b>	<b>Description</b>
ERROR_CLUSCFG_ROLLBACK_FAILED	could not be rolled back.
0x0000170F ERROR_CLUSCFG_SYSTEM_DISK_DRIVE_LETTER_CONFLICT	The drive letter assigned to a system disk on one node conflicted with the drive letter assigned to a disk on another node.
0x00001710 ERROR_CLUSTER_OLD_VERSION	One or more nodes in the cluster are running a version of Windows that does not support this operation.
0x00001711 ERROR_CLUSTER_MISMATCHED_COMPUTER_ACCT_NAME	The name of the corresponding computer account does not match the network name for this resource.
0x00001712 ERROR_CLUSTER_NO_NET_ADAPTERS	No network adapters are available.
0x00001713 ERROR_CLUSTER_POISONED	The cluster node has been poisoned.
0x00001714 ERROR_CLUSTER_GROUP_MOVING	The group is unable to accept the request because it is moving to another node.
0x00001715 ERROR_CLUSTER_RESOURCE_TYPE_BUSY	The resource type cannot accept the request because it is too busy performing another operation.
0x00001716 ERROR_RESOURCE_CALL_TIMED_OUT	The call to the cluster resource DLL timed out.
0x00001717 ERROR_INVALID_CLUSTER_IPV6_ADDRESS	The address is not valid for an IPv6 Address resource. A global IPv6 address is required, and it must match a cluster network. Compatibility addresses are not permitted.
0x00001718 ERROR_CLUSTER_INTERNAL_INVALID_FUNCTION	An internal cluster error occurred. A call to an invalid function was attempted.
0x00001719 ERROR_CLUSTER_PARAMETER_OUT_OF_BOUNDS	A parameter value is out of acceptable range.
0x0000171A ERROR_CLUSTER_PARTIAL_SEND	A network error occurred while sending data to another node in the cluster. The number of bytes transmitted was less than required.
0x0000171B ERROR_CLUSTER_REGISTRY_INVALID_FUNCTION	An invalid cluster registry operation was attempted.
0x0000171C ERROR_CLUSTER_INVALID_STRING_TERMINATION	An input string of characters is not properly terminated.

<b>Win32 error codes</b>	<b>Description</b>
0x0000171D ERROR_CLUSTER_INVALID_STRING_FORMAT	An input string of characters is not in a valid format for the data it represents.
0x0000171E ERROR_CLUSTER_DATABASE_TRANSACTION_IN_PROGRESS	An internal cluster error occurred. A cluster database transaction was attempted while a transaction was already in progress.
0x0000171F ERROR_CLUSTER_DATABASE_TRANSACTION_NOT_IN_PROGRESS	An internal cluster error occurred. There was an attempt to commit a cluster database transaction while no transaction was in progress.
0x00001720 ERROR_CLUSTER_NULL_DATA	An internal cluster error occurred. Data was not properly initialized.
0x00001721 ERROR_CLUSTER_PARTIAL_READ	An error occurred while reading from a stream of data. An unexpected number of bytes was returned.
0x00001722 ERROR_CLUSTER_PARTIAL_WRITE	An error occurred while writing to a stream of data. The required number of bytes could not be written.
0x00001723 ERROR_CLUSTER_CANT_DESERIALIZE_DATA	An error occurred while deserializing a stream of cluster data.
0x00001724 ERROR_DEPENDENT_RESOURCE_PROPERTY_CONFLICT	One or more property values for this resource are in conflict with one or more property values associated with its dependent resources.
0x00001725 ERROR_CLUSTER_NO_QUORUM	A quorum of cluster nodes was not present to form a cluster.
0x00001726 ERROR_CLUSTER_INVALID_IPV6_NETWORK	The cluster network is not valid for an IPv6 address resource, or it does not match the configured address.
0x00001727 ERROR_CLUSTER_INVALID_IPV6_TUNNEL_NETWORK	The cluster network is not valid for an IPv6 tunnel resource. Check the configuration of the IP Address resource on which the IPv6 tunnel resource depends.
0x00001728 ERROR_QUORUM_NOT_ALLOWED_IN_THIS_GROUP	Quorum resource cannot reside in the available storage group.
0x00001770 ERROR_ENCRYPTION_FAILED	The specified file could not be encrypted.
0x00001771	The specified file could not be decrypted.

<b>Win32 error codes</b>	<b>Description</b>
ERROR_DECRYPTION_FAILED	
0x00001772 ERROR_FILE_ENCRYPTED	The specified file is encrypted and the user does not have the ability to decrypt it.
0x00001773 ERROR_NO_RECOVERY_POLICY	There is no valid encryption recovery policy configured for this system.
0x00001774 ERROR_NO_EFS	The required encryption driver is not loaded for this system.
0x00001775 ERROR_WRONG_EFS	The file was encrypted with a different encryption driver than is currently loaded.
0x00001776 ERROR_NO_USER_KEYS	There are no Encrypting File System (EFS) keys defined for the user.
0x00001777 ERROR_FILE_NOT_ENCRYPTED	The specified file is not encrypted.
0x00001778 ERROR_NOT_EXPORT_FORMAT	The specified file is not in the defined EFS export format.
0x00001779 ERROR_FILE_READ_ONLY	The specified file is read-only.
0x0000177A ERROR_DIR_EFS_DISALLOWED	The directory has been disabled for encryption.
0x0000177B ERROR_EFS_SERVER_NOT_TRUSTED	The server is not trusted for remote encryption operation.
0x0000177C ERROR_BAD_RECOVERY_POLICY	Recovery policy configured for this system contains invalid recovery certificate.
0x0000177D ERROR_EFS_ALG_BLOB_TOO_BIG	The encryption algorithm used on the source file needs a bigger key buffer than the one on the destination file.
0x0000177E ERROR_VOLUME_NOT_SUPPORT_EFS	The disk partition does not support file encryption.
0x0000177F ERROR_EFS_DISABLED	This machine is disabled for file encryption.
0x00001780 ERROR_EFS_VERSION_NOT_SUPPORT	A newer system is required to decrypt this encrypted file.
0x00001781 ERROR_CS_ENCRYPTION_INVALID_SERVER_RESPONSE	The remote server sent an invalid response for a file being opened with client-side encryption.
0x00001782	Client-side encryption is not

Win32 error codes	Description
ERROR_CS_ENCRYPTION_UNSUPPORTED_SERVER	supported by the remote server even though it claims to support it.
0x00001783 ERROR_CS_ENCRYPTION_EXISTING_ENCRYPTED_FILE	File is encrypted and should be opened in client-side encryption mode.
0x00001784 ERROR_CS_ENCRYPTION_NEW_ENCRYPTED_FILE	A new encrypted file is being created and a \$EFS needs to be provided.
0x00001785 ERROR_CS_ENCRYPTION_FILE_NOT_CSE	The SMB client requested a client-side extension (CSE) file system control (FSCTL) on a non-CSE file.
0x000017E6 ERROR_NO_BROWSER_SERVERS_FOUND	The list of servers for this workgroup is not currently available
0x00001838 SCHED_E_SERVICE_NOT_LOCALSYSTEM	The Task Scheduler service must be configured to run in the System account to function properly. Individual tasks <b>may can</b> be configured to run in other accounts.
0x000019C8 ERROR_LOG_SECTOR_INVALID	The log service encountered an invalid log sector.
0x000019C9 ERROR_LOG_SECTOR_PARITY_INVALID	The log service encountered a log sector with invalid block parity.
0x000019CA ERROR_LOG_SECTOR_REMAPPED	The log service encountered a remapped log sector.
0x000019CB ERROR_LOG_BLOCK_INCOMPLETE	The log service encountered a partial or incomplete log block.
0x000019CC ERROR_LOG_INVALID_RANGE	The log service encountered an attempt to access data outside the active log range.
0x000019CD ERROR_LOG_BLOCKS_EXHAUSTED	The log service user marshaling buffers are exhausted.
0x000019CE ERROR_LOG_READ_CONTEXT_INVALID	The log service encountered an attempt to read from a marshaling area with an invalid read context.
0x000019CF ERROR_LOG_RESTART_INVALID	The log service encountered an invalid log restart area.
0x000019D0 ERROR_LOG_BLOCK_VERSION	The log service encountered an invalid log block version.
0x000019D1 ERROR_LOG_BLOCK_INVALID	The log service encountered an invalid log block.

<b>Win32 error codes</b>	<b>Description</b>
0x000019D2 ERROR_LOG_READ_MODE_INVALID	The log service encountered an attempt to read the log with an invalid read mode.
0x000019D3 ERROR_LOG_NO_RESTART	The log service encountered a log stream with no restart area.
0x000019D4 ERROR_LOG_METADATA_CORRUPT	The log service encountered a corrupted metadata file.
0x000019D5 ERROR_LOG_METADATA_INVALID	The log service encountered a metadata file that could not be created by the log file system.
0x000019D6 ERROR_LOG_METADATA_INCONSISTENT	The log service encountered a metadata file with inconsistent data.
0x000019D7 ERROR_LOG_RESERVATION_INVALID	The log service encountered an attempt to erroneously allocate or dispose reservation space.
0x000019D8 ERROR_LOG_CANT_DELETE	The log service cannot delete a log file or file system container.
0x000019D9 ERROR_LOG_CONTAINER_LIMIT_EXCEEDED	The log service has reached the maximum allowable containers allocated to a log file.
0x000019DA ERROR_LOG_START_OF_LOG	The log service has attempted to read or write backward past the start of the log.
0x000019DB ERROR_LOG_POLICY_ALREADY_INSTALLED	The log policy could not be installed because a policy of the same type is already present.
0x000019DC ERROR_LOG_POLICY_NOT_INSTALLED	The log policy in question was not installed at the time of the request.
0x000019DD ERROR_LOG_POLICY_INVALID	The installed set of policies on the log is invalid.
0x000019DE ERROR_LOG_POLICY_CONFLICT	A policy on the log in question prevented the operation from completing.
0x000019DF ERROR_LOG_PINNED_ARCHIVE_TAIL	Log space cannot be reclaimed because the log is pinned by the archive tail.
0x000019E0 ERROR_LOG_RECORD_NONEXISTENT	The log record is not a record in the log file.
0x000019E1 ERROR_LOG_RECORDS_RESERVED_INVALID	The number of reserved log records or the adjustment of the number of reserved log records is invalid.
0x000019E2	The reserved log space or the

<b>Win32 error codes</b>	<b>Description</b>
ERROR_LOG_SPACE_RESERVED_INVALID	adjustment of the log space is invalid.
0x000019E3 ERROR_LOG_TAIL_INVALID	A new or existing archive tail or base of the active log is invalid.
0x000019E4 ERROR_LOG_FULL	The log space is exhausted.
0x000019E5 ERROR_COULD_NOT_RESIZE_LOG	The log could not be set to the requested size.
0x000019E6 ERROR_LOG_MULTIPLEXED	The log is multiplexed; no direct writes to the physical log are allowed.
0x000019E7 ERROR_LOG_DEDICATED	The operation failed because the log is a dedicated log.
0x000019E8 ERROR_LOG_ARCHIVE_NOT_IN_PROGRESS	The operation requires an archive context.
0x000019E9 ERROR_LOG_ARCHIVE_IN_PROGRESS	Log archival is in progress.
0x000019EA ERROR_LOG_EPHEMERAL	The operation requires a non-ephemeral log, but the log is ephemeral.
0x000019EB ERROR_LOG_NOT_ENOUGH_CONTAINERS	The log must have at least two containers before it can be read from or written to.
0x000019EC ERROR_LOG_CLIENT_ALREADY_REGISTERED	A log client has already registered on the stream.
0x000019ED ERROR_LOG_CLIENT_NOT_REGISTERED	A log client has not been registered on the stream.
0x000019EE ERROR_LOG_FULL_HANDLER_IN_PROGRESS	A request has already been made to handle the log full condition.
0x000019EF ERROR_LOG_CONTAINER_READ_FAILED	The log service encountered an error when attempting to read from a log container.
0x000019F0 ERROR_LOG_CONTAINER_WRITE_FAILED	The log service encountered an error when attempting to write to a log container.
0x000019F1 ERROR_LOG_CONTAINER_OPEN_FAILED	The log service encountered an error when attempting to open a log container.
0x000019F2 ERROR_LOG_CONTAINER_STATE_INVALID	The log service encountered an invalid container state when attempting a requested action.
0x000019F3	The log service is not in the correct state to perform a

<b>Win32 error codes</b>	<b>Description</b>
ERROR_LOG_STATE_INVALID	requested action.
0x000019F4 ERROR_LOG_PINNED	The log space cannot be reclaimed because the log is pinned.
0x000019F5 ERROR_LOG_METADATA_FLUSH_FAILED	The log metadata flush failed.
0x000019F6 ERROR_LOG_INCONSISTENT_SECURITY	Security on the log and its containers is inconsistent.
0x000019F7 ERROR_LOG_APPENDED_FLUSH_FAILED	Records were appended to the log or reservation changes were made, but the log could not be flushed.
0x000019F8 ERROR_LOG_PINNED_RESERVATION	The log is pinned due to reservation consuming most of the log space. Free some reserved records to make space available.
0x00001A2C ERROR_INVALID_TRANSACTION	The transaction handle associated with this operation is not valid.
0x00001A2D ERROR_TRANSACTION_NOT_ACTIVE	The requested operation was made in the context of a transaction that is no longer active.
0x00001A2E ERROR_TRANSACTION_REQUEST_NOT_VALID	The requested operation is not valid on the transaction object in its current state.
0x00001A2F ERROR_TRANSACTION_NOT_REQUESTED	The caller has called a response API, but the response is not expected because the transaction manager did not issue the corresponding request to the caller.
0x00001A30 ERROR_TRANSACTION_ALREADY_ABORTED	It is too late to perform the requested operation because the transaction has already been aborted.
0x00001A31 ERROR_TRANSACTION_ALREADY_COMMITTED	It is too late to perform the requested operation because the transaction has already been committed.
0x00001A32 ERROR_TM_INITIALIZATION_FAILED	The transaction manager was unable to be successfully initialized. Transacted operations are not supported.
0x00001A33 ERROR_RESOURCEMANAGER_READ_ONLY	The specified resource manager made no changes or updates to the resource under this transaction.

<b>Win32 error codes</b>	<b>Description</b>
0x00001A34 ERROR_TRANSACTION_NOT_JOINED	The resource manager has attempted to prepare a transaction that it has not successfully joined.
0x00001A35 ERROR_TRANSACTION_SUPERIOR_EXISTS	The transaction object already has a superior enlistment, and the caller attempted an operation that would have created a new superior. Only a single superior enlistment is allowed.
0x00001A36 ERROR_CRM_PROTOCOL_ALREADY_EXISTS	The resource manager tried to register a protocol that already exists.
0x00001A37 ERROR_TRANSACTION_PROPAGATION_FAILED	The attempt to propagate the transaction failed.
0x00001A38 ERROR_CRM_PROTOCOL_NOT_FOUND	The requested propagation protocol was not registered as a CRM.
0x00001A39 ERROR_TRANSACTION_INVALID_MARSHALL_BUFFER	The buffer passed in to PushTransaction or PullTransaction is not in a valid format.
0x00001A3A ERROR_CURRENT_TRANSACTION_NOT_VALID	The current transaction context associated with the thread is not a valid handle to a transaction object.
0x00001A3B ERROR_TRANSACTION_NOT_FOUND	The specified transaction object could not be opened because it was not found.
0x00001A3C ERROR_RESOURCEMANAGER_NOT_FOUND	The specified resource manager object could not be opened because it was not found.
0x00001A3D ERROR_ENLISTMENT_NOT_FOUND	The specified enlistment object could not be opened because it was not found.
0x00001A3E ERROR_TRANSACTIONMANAGER_NOT_FOUND	The specified transaction manager object could not be opened because it was not found.
0x00001A3F ERROR_TRANSACTIONMANAGER_NOT_ONLINE	The specified resource manager was unable to create an enlistment because its associated transaction manager is not online.
0x00001A40 ERROR_TRANSACTIONMANAGER_RECOVERY_NAME_COLLISION	The specified transaction manager was unable to create the objects contained in its log file in the ObjectB namespace. Therefore, the transaction

Win32 error codes	Description
	manager was unable to recover.
0x00001A90 ERROR_TRANSACTIONAL_CONFLICT	The function attempted to use a name that is reserved for use by another transaction.
0x00001A91 ERROR_RM_NOT_ACTIVE	Transaction support within the specified file system resource manager is not started or was shut down due to an error.
0x00001A92 ERROR_RM_METADATA_CORRUPT	The metadata of the resource manager has been corrupted. The resource manager will not function.
0x00001A93 ERROR_DIRECTORY_NOT_RM	The specified directory does not contain a resource manager.
0x00001A95 ERROR_TRANSACTIONS_UNSUPPORTED_REMOTE	The remote server or share does not support transacted file operations.
0x00001A96 ERROR_LOG_RESIZE_INVALID_SIZE	The requested log size is invalid.
0x00001A97 ERROR_OBJECT_NO_LONGER_EXISTS	The object (file, stream, link) corresponding to the handle has been deleted by a transaction savepoint rollback.
0x00001A98 ERROR_STREAM_MINIVERSION_NOT_FOUND	The specified file miniversion was not found for this transacted file open.
0x00001A99 ERROR_STREAM_MINIVERSION_NOT_VALID	The specified file miniversion was found but has been invalidated. The most likely cause is a transaction savepoint rollback.
0x00001A9A ERROR_MINIVERSION_INACCESSIBLE_FROM_SPECIFIED_TRANSACTION	A miniversion <b>may</b> only be opened in the context of the transaction that created it.
0x00001A9B ERROR_CANT_OPEN_MINIVERSION_WITH_MODIFY_INTENT	It is not possible to open a miniversion with modify access.
0x00001A9C ERROR_CANT_CREATE_MORE_STREAM_MINIVERSIONS	It is not possible to create any more miniversions for this stream.
0x00001A9E ERROR_REMOTE_FILE_VERSION_MISMATCH	The remote server sent mismatching version numbers or FID for a file opened with transactions.
0x00001A9F ERROR_HANDLE_NO_LONGER_VALID	The handle has been invalidated by a transaction. The most likely cause is the presence of memory mapping on a file, or an open handle when the transaction

Win32 error codes	Description
	ended or rolled back to savepoint.
0x00001AA0 ERROR_NO_TXF_METADATA	There is no transaction metadata on the file.
0x00001AA1 ERROR_LOG_CORRUPTION_DETECTED	The log data is corrupt.
0x00001AA2 ERROR_CANT_RECOVER_WITH_HANDLE_OPEN	The file cannot be recovered because a handle is still open on it.
0x00001AA3 ERROR_RM_DISCONNECTED	The transaction outcome is unavailable because the resource manager responsible for it is disconnected.
0x00001AA4 ERROR_ENLISTMENT_NOT_SUPERIOR	The request was rejected because the enlistment in question is not a superior enlistment.
0x00001AA5 ERROR_RECOVERY_NOT_NEEDED	The transactional resource manager is already consistent. Recovery is not needed.
0x00001AA6 ERROR_RM_ALREADY_STARTED	The transactional resource manager has already been started.
0x00001AA7 ERROR_FILE_IDENTITY_NOT_PERSISTENT	The file cannot be opened in a transaction because its identity depends on the outcome of an unresolved transaction.
0x00001AA8 ERROR_CANT_BREAK_TRANSACTIONAL_DEPENDENCY	The operation cannot be performed because another transaction is depending on the fact that this property will not change.
0x00001AA9 ERROR_CANT_CROSS_RM_BOUNDARY	The operation would involve a single file with two transactional resource managers and is therefore not allowed.
0x00001AAA ERROR_TXF_DIR_NOT_EMPTY	The \$Txf directory must be empty for this operation to succeed.
0x00001AAB ERROR_INDOUBT_TRANSACTIONS_EXIST	The operation would leave a transactional resource manager in an inconsistent state and is, therefore, not allowed.
0x00001AAC ERROR_TM_VOLATILE	The operation could not be completed because the transaction manager does not have a log.
0x00001AAD	A rollback could not be scheduled because a previously

Win32 error codes	Description
ERROR_ROLLBACK_TIMER_EXPIRED	scheduled rollback has already been executed or is queued for execution.
0x00001AAE ERROR_TXF_ATTRIBUTE_CORRUPT	The transactional metadata attribute on the file or directory is corrupt and unreadable.
0x00001AAF ERROR_EFS_NOT_ALLOWED_IN_TRANSACTION	The encryption operation could not be completed because a transaction is active.
0x00001AB0 ERROR_TRANSACTIONAL_OPEN_NOT_ALLOWED	This object is not allowed to be opened in a transaction.
0x00001AB1 ERROR_LOG_GROWTH_FAILED	An attempt to create space in the transactional resource manager's log failed. The failure status has been recorded in the event log.
0x00001AB2 ERROR_TRANSACTED_MAPPING_UNSUPPORTED_REMOTE	Memory mapping (creating a mapped section) to a remote file under a transaction is not supported.
0x00001AB3 ERROR_TXF_METADATA_ALREADY_PRESENT	Transaction metadata is already present on this file and cannot be superseded.
0x00001AB4 ERROR_TRANSACTION_SCOPE_CALLBACKS_NOT_SET	A transaction scope could not be entered because the scope handler has not been initialized.
0x00001AB5 ERROR_TRANSACTION_REQUIRED_PROMOTION	Promotion was required to allow the resource manager to enlist, but the transaction was set to disallow it.
0x00001AB6 ERROR_CANNOT_EXECUTE_FILE_IN_TRANSACTION	This file is open for modification in an unresolved transaction and <b>may</b> be opened for execution only by a transacted reader.
0x00001AB7 ERROR_TRANSACTIONS_NOT_FROZEN	The request to thaw frozen transactions was ignored because transactions were not previously frozen.
0x00001AB8 ERROR_TRANSACTION_FREEZE_IN_PROGRESS	Transactions cannot be frozen because a freeze is already in progress.
0x00001AB9 ERROR_NOT_SNAPSHOT_VOLUME	The target volume is not a snapshot volume. This operation is only valid on a volume mounted as a snapshot.
0x00001ABA ERROR_NO_SAVEPOINT_WITH_OPEN_FILES	The savepoint operation failed because files are open on the transaction. This is not permitted.

Win32 error codes	Description
0x00001ABB ERROR_DATA_LOST_REPAIR	Windows has discovered corruption in a file, and that file has since been repaired. Data loss <b>may</b> have occurred.
0x00001ABC ERROR_SPARSE_NOT_ALLOWED_IN_TRANSACTION	The sparse operation could not be completed because a transaction is active on the file.
0x00001ABD ERROR_TM_IDENTITY_MISMATCH	The call to create a transaction manager object failed because the Tm Identity stored in the logfile does not match the Tm Identity that was passed in as an argument.
0x00001ABE ERROR_FLOATED_SECTION	I/O was attempted on a section object that has been floated as a result of a transaction ending. There is no valid data.
0x00001ABF ERROR_CANNOT_ACCEPT_TRANSACTED_WORK	The transactional resource manager cannot currently accept transacted work due to a transient condition, such as low resources.
0x00001AC0 ERROR_CANNOT_ABORT_TRANSACTIONS	The transactional resource manager had too many transactions outstanding that could not be aborted. The transactional resource manager has been shut down.
0x00001B59 ERROR_CTX_WINSTATION_NAME_INVALID	The specified session name is invalid.
0x00001B5A ERROR_CTX_INVALID_PD	The specified protocol driver is invalid.
0x00001B5B ERROR_CTX_PD_NOT_FOUND	The specified protocol driver was not found in the system path.
0x00001B5C ERROR_CTX_WD_NOT_FOUND	The specified terminal connection driver was not found in the system path.
0x00001B5D ERROR_CTX_CANNOT_MAKE_EVENTLOG_ENTRY	A registry key for event logging could not be created for this session.
0x00001B5E ERROR_CTX_SERVICE_NAME_COLLISION	A service with the same name already exists on the system.
0x00001B5F ERROR_CTX_CLOSE_PENDING	A close operation is pending on the session.
0x00001B60 ERROR_CTX_NO_OUTBUF	There are no free output buffers available.
0x00001B61	The MODEM.INF file was not

<b>Win32 error codes</b>	<b>Description</b>
ERROR_CTX_MODEM_INF_NOT_FOUND	found.
0x00001B62 ERROR_CTX_INVALID_MODEMNAME	The modem name was not found in the MODEM.INF file.
0x00001B63 ERROR_CTX_MODEM_RESPONSE_ERROR	The modem did not accept the command sent to it. Verify that the configured modem name matches the attached modem.
0x00001B64 ERROR_CTX_MODEM_RESPONSE_TIMEOUT	The modem did not respond to the command sent to it. Verify that the modem is properly cabled and turned on.
0x00001B65 ERROR_CTX_MODEM_RESPONSE_NO_CARRIER	Carrier detect has failed or carrier has been dropped due to disconnect.
0x00001B66 ERROR_CTX_MODEM_RESPONSE_NO_DIALTONE	Dial tone not detected within the required time. Verify that the phone cable is properly attached and functional.
0x00001B67 ERROR_CTX_MODEM_RESPONSE_BUSY	Busy signal detected at remote site on callback.
0x00001B68 ERROR_CTX_MODEM_RESPONSE_VOICE	Voice detected at remote site on callback.
0x00001B69 ERROR_CTX_TD_ERROR	Transport driver error.
0x00001B6E ERROR_CTX_WINSTATION_NOT_FOUND	The specified session cannot be found.
0x00001B6F ERROR_CTX_WINSTATION_ALREADY_EXISTS	The specified session name is already in use.
0x00001B70 ERROR_CTX_WINSTATION_BUSY	The requested operation cannot be completed because the terminal connection is currently busy processing a connect, disconnect, reset, or delete operation.
0x00001B71 ERROR_CTX_BAD_VIDEO_MODE	An attempt has been made to connect to a session whose video mode is not supported by the current client.
0x00001B7B ERROR_CTX_GRAPHICS_INVALID	The application attempted to enable DOS graphics mode. DOS graphics mode is not supported.
0x00001B7D ERROR_CTX_LOGON_DISABLED	Your interactive logon privilege has been disabled. Contact your administrator.
0x00001B7E ERROR_CTX_NOT_CONSOLE	The requested operation can be performed only on the system

Win32 error codes	Description
	console. This is most often the result of a driver or system DLL requiring direct console access.
0x00001B80 ERROR_CTX_CLIENT_QUERY_TIMEOUT	The client failed to respond to the server connect message.
0x00001B81 ERROR_CTX_CONSOLE_DISCONNECT	Disconnecting the console session is not supported.
0x00001B82 ERROR_CTX_CONSOLE_CONNECT	Reconnecting a disconnected session to the console is not supported.
0x00001B84 ERROR_CTX_SHADOW_DENIED	The request to control another session remotely was denied.
0x00001B85 ERROR_CTX_WINSTATION_ACCESS_DENIED	The requested session access is denied.
0x00001B89 ERROR_CTX_INVALID_WD	The specified terminal connection driver is invalid.
0x00001B8A ERROR_CTX_SHADOW_INVALID	The requested session cannot be controlled remotely. This <b>may</b> be because the session is disconnected or does not currently have a user logged on.
0x00001B8B ERROR_CTX_SHADOW_DISABLED	The requested session is not configured to allow remote control.
0x00001B8C ERROR_CTX_CLIENT_LICENSE_IN_USE	Your request to connect to this terminal server has been rejected. Your terminal server client license number is currently being used by another user. Call your system administrator to obtain a unique license number.
0x00001B8D ERROR_CTX_CLIENT_LICENSE_NOT_SET	Your request to connect to this terminal server has been rejected. Your terminal server client license number has not been entered for this copy of the terminal server client. Contact your system administrator.
0x00001B8E ERROR_CTX_LICENSE_NOT_AVAILABLE	The number of connections to this computer is limited and all connections are in use right now. Try connecting later or contact your system administrator.
0x00001B8F ERROR_CTX_LICENSE_CLIENT_INVALID	The client you are using is not licensed to use this system. Your logon request is denied.
0x00001B90	The system license has expired.

<b>Win32 error codes</b>	<b>Description</b>
ERROR_CTX_LICENSE_EXPIRED	Your logon request is denied.
0x00001B91 ERROR_CTX_SHADOW_NOT_RUNNING	Remote control could not be terminated because the specified session is not currently being remotely controlled.
0x00001B92 ERROR_CTX_SHADOW_ENDED_BY_MODE_CHANGE	The remote control of the console was terminated because the display mode was changed. Changing the display mode in a remote control session is not supported.
0x00001B93 ERROR_ACTIVATION_COUNT_EXCEEDED	Activation has already been reset the maximum number of times for this installation. Your activation timer will not be cleared.
0x00001B94 ERROR_CTX_WINSTATIONS_DISABLED	Remote logons are currently disabled.
0x00001B95 ERROR_CTX_ENCRYPTION_LEVEL_REQUIRED	You do not have the proper encryption level to access this session.
0x00001B96 ERROR_CTX_SESSION_IN_USE	The user %s\\%s is currently logged on to this computer. Only the current user or an administrator can log on to this computer.
0x00001B97 ERROR_CTX_NO_FORCE_LOGOFF	The user %s\\%s is already logged on to the console of this computer. You do not have permission to log in at this time. To resolve this issue, contact %s\\%s and have them log off.
0x00001B98 ERROR_CTX_ACCOUNT_RESTRICTION	Unable to log you on because of an account restriction.
0x00001B99 ERROR_RDP_PROTOCOL_ERROR	The RDP component %2 detected an error in the protocol stream and has disconnected the client.
0x00001B9A ERROR_CTX_CDM_CONNECT	The Client Drive Mapping Service has connected on terminal connection.
0x00001B9B ERROR_CTX_CDM_DISCONNECT	The Client Drive Mapping Service has disconnected on terminal connection.
0x00001B9C ERROR_CTX_SECURITY_LAYER_ERROR	The terminal server security layer detected an error in the protocol stream and has disconnected the client.
0x00001B9D	The target session is

Win32 error codes	Description
ERROR_TS_INCOMPATIBLE_SESSIONS	incompatible with the current session.
0x00001F41 FRS_ERR_INVALID_API_SEQUENCE	The file replication service API was called incorrectly.
0x00001F42 FRS_ERR_STARTING_SERVICE	The file replication service cannot be started.
0x00001F43 FRS_ERR_STOPPING_SERVICE	The file replication service cannot be stopped.
0x00001F44 FRS_ERR_INTERNAL_API	The file replication service API terminated the request. The event log <b>may havemight contain</b> more information.
0x00001F45 FRS_ERR_INTERNAL	The file replication service terminated the request. The event log <b>may havemight contain</b> more information.
0x00001F46 FRS_ERR_SERVICE_COMM	The file replication service cannot be contacted. The event log <b>may havemight contain</b> more information.
0x00001F47 FRS_ERR_INSUFFICIENT_PRIV	The file replication service cannot satisfy the request because the user has insufficient privileges. The event log <b>may havemight contain</b> more information.
0x00001F48 FRS_ERR_AUTHENTICATION	The file replication service cannot satisfy the request because authenticated RPC is not available. The event log <b>may havemight contain</b> more information.
0x00001F49 FRS_ERR_PARENT_INSUFFICIENT_PRIV	The file replication service cannot satisfy the request because the user has insufficient privileges on the domain controller. The event log <b>may havemight contain</b> more information.
0x00001F4A FRS_ERR_PARENT_AUTHENTICATION	The file replication service cannot satisfy the request because authenticated RPC is not available on the domain controller. The event log <b>may havemight contain</b> more information.
0x00001F4B FRS_ERR_CHILD_TO_PARENT_COMM	The file replication service cannot communicate with the file replication service on the domain controller. The event log <b>may havemight contain</b> more information.

Win32 error codes	Description
	information.
0x00001F4C FRS_ERR_PARENT_TO_CHILD_COMM	The file replication service on the domain controller cannot communicate with the file replication service on this computer. The event log <b>may</b> <a href="#">havemight contain</a> more information.
0x00001F4D FRS_ERR_SYSVOL_POPULATE	The file replication service cannot populate the system volume because of an internal error. The event log <b>may</b> <a href="#">havemight contain</a> more information.
0x00001F4E FRS_ERR_SYSVOL_POPULATE_TIMEOUT	The file replication service cannot populate the system volume because of an internal time-out. The event log <b>may</b> <a href="#">havemight contain</a> more information.
0x00001F4F FRS_ERR_SYSVOL_IS_BUSY	The file replication service cannot process the request. The system volume is busy with a previous request.
0x00001F50 FRS_ERR_SYSVOL_DEMOTE	The file replication service cannot stop replicating the system volume because of an internal error. The event log <b>may</b> <a href="#">havemight contain</a> more information.
0x00001F51 FRS_ERR_INVALID_SERVICE_PARAMETER	The file replication service detected an invalid parameter.
0x00002008 ERROR_DS_NOT_INSTALLED	An error occurred while installing the directory service. For more information, see the event log.
0x00002009 ERROR_DS_MEMBERSHIP_EVALUATED_LOCALLY	The directory service evaluated group memberships locally.
0x0000200A ERROR_DS_NO_ATTRIBUTE_OR_VALUE	The specified directory service attribute or value does not exist.
0x0000200B ERROR_DS_INVALID_ATTRIBUTE_YNTAX	The attribute syntax specified to the directory service is invalid.
0x0000200C ERROR_DS_ATTRIBUTE_TYPE_UNDEFINED	The attribute type specified to the directory service is not defined.
0x0000200D ERROR_DS_ATTRIBUTE_OR_VALUE_EXISTS	The specified directory service attribute or value already exists.
0x0000200E ERROR_DS_BUSY	The directory service is busy.

<b>Win32 error codes</b>	<b>Description</b>
0x0000200F ERROR_DS_UNAVAILABLE	The directory service is unavailable.
0x00002010 ERROR_DS_NO_RIDS_ALLOCATED	The directory service was unable to allocate a relative identifier.
0x00002011 ERROR_DS_NO_MORE_RIDS	The directory service has exhausted the pool of relative identifiers.
0x00002012 ERROR_DS_INCORRECT_ROLE_OWNER	The requested operation could not be performed because the directory service is not the master for that type of operation.
0x00002013 ERROR_DS_RIDMGR_INIT_ERROR	The directory service was unable to initialize the subsystem that allocates relative identifiers.
0x00002014 ERROR_DS_OBJ_CLASS_VIOLATION	The requested operation did not satisfy one or more constraints associated with the class of the object.
0x00002015 ERROR_DS_CANT_ON_NON_LEAF	The directory service can perform the requested operation only on a leaf object.
0x00002016 ERROR_DS_CANT_ON_RDN	The directory service cannot perform the requested operation on the relative distinguished name (RDN) attribute of an object.
0x00002017 ERROR_DS_CANT_MOD_OBJ_CLASS	The directory service detected an attempt to modify the object class of an object.
0x00002018 ERROR_DS_CROSS_DOM_MOVE_ERROR	The requested cross-domain move operation could not be performed.
0x00002019 ERROR_DS_GC_NOT_AVAILABLE	Unable to contact the global catalog (GC) server.
0x0000201A ERROR_SHARED_POLICY	The policy object is shared and can only be modified at the root.
0x0000201B ERROR_POLICY_OBJECT_NOT_FOUND	The policy object does not exist.
0x0000201C ERROR_POLICY_ONLY_IN_DS	The requested policy information is only in the directory service.
0x0000201D ERROR_PROMOTION_ACTIVE	A domain controller promotion is currently active.
0x0000201E ERROR_NO_PROMOTION_ACTIVE	A domain controller promotion is not currently active.

<b>Win32 error codes</b>	<b>Description</b>
0x00002020 ERROR_DS_OPERATIONS_ERROR	An operations error occurred.
0x00002021 ERROR_DS_PROTOCOL_ERROR	A protocol error occurred.
0x00002022 ERROR_DS_TIMELIMIT_EXCEEDED	The time limit for this request was exceeded.
0x00002023 ERROR_DS_SIZELIMIT_EXCEEDED	The size limit for this request was exceeded.
0x00002024 ERROR_DS_ADMIN_LIMIT_EXCEEDED	The administrative limit for this request was exceeded.
0x00002025 ERROR_DS_COMPARE_FALSE	The compare response was false.
0x00002026 ERROR_DS_COMPARE_TRUE	The compare response was true.
0x00002027 ERROR_DS_AUTH_METHOD_NOT_SUPPORTED	The requested authentication method is not supported by the server.
0x00002028 ERROR_DS_STRONG_AUTH_REQUIRED	A more secure authentication method is required for this server.
0x00002029 ERROR_DS_INAPPROPRIATE_AUTH	Inappropriate authentication.
0x0000202A ERROR_DS_AUTH_UNKNOWN	The authentication mechanism is unknown.
0x0000202B ERROR_DS_REFERRAL	A referral was returned from the server.
0x0000202C ERROR_DS_UNAVAILABLE_CRIT_EXTENSION	The server does not support the requested critical extension.
0x0000202D ERROR_DS_CONFIDENTIALITY_REQUIRED	This request requires a secure connection.
0x0000202E ERROR_DS_INAPPROPRIATE_MATCHING	Inappropriate matching.
0x0000202F ERROR_DS_CONSTRAINT_VIOLATION	A constraint violation occurred.
0x00002030 ERROR_DS_NO_SUCH_OBJECT	There is no such object on the server.
0x00002031 ERROR_DS_ALIAS_PROBLEM	There is an alias problem.
0x00002032	An invalid dn syntax has been specified.

<b>Win32 error codes</b>	<b>Description</b>
ERROR_DS_INVALID_DN_SYNTAX	
0x00002033 ERROR_DS_IS_LEAF	The object is a leaf object.
0x00002034 ERROR_DS_ALIAS_DEREF_PROBLEM	There is an alias dereferencing problem.
0x00002035 ERROR_DS_UNWILLING_TO_PERFORM	The server is unwilling to process the request.
0x00002036 ERROR_DS_LOOP_DETECT	A loop has been detected.
0x00002037 ERROR_DS_NAMING_VIOLATION	There is a naming violation.
0x00002038 ERROR_DS_OBJECT_RESULTS_TOO_LARGE	The result set is too large.
0x00002039 ERROR_DS_AFFECTS_MULTIPLE_DSAS	The operation affects multiple DSAs.
0x0000203A ERROR_DS_SERVER_DOWN	The server is not operational.
0x0000203B ERROR_DS_LOCAL_ERROR	A local error has occurred.
0x0000203C ERROR_DS_ENCODING_ERROR	An encoding error has occurred.
0x0000203D ERROR_DS_DECODING_ERROR	A decoding error has occurred.
0x0000203E ERROR_DS_FILTER_UNKNOWN	The search filter cannot be recognized.
0x0000203F ERROR_DS_PARAM_ERROR	One or more parameters are illegal.
0x00002040 ERROR_DS_NOT_SUPPORTED	The specified method is not supported.
0x00002041 ERROR_DS_NO_RESULTS_RETURNED	No results were returned.
0x00002042 ERROR_DS_CONTROL_NOT_FOUND	The specified control is not supported by the server.
0x00002043 ERROR_DS_CLIENT_LOOP	A referral loop was detected by the client.
0x00002044 ERROR_DS_REFERRAL_LIMIT_EXCEEDED	The preset referral limit was exceeded.
0x00002045	The search requires a SORT

<b>Win32 error codes</b>	<b>Description</b>
ERROR_DS_SORT_CONTROL_MISSING	control.
0x00002046 ERROR_DS_OFFSET_RANGE_ERROR	The search results exceed the offset range specified.
0x0000206D ERROR_DS_ROOT_MUST_BE_NC	The root object must be the head of a naming context. The root object cannot have an instantiated parent.
0x0000206E ERROR_DS_ADD_REPLICA_INHIBITED	The add replica operation cannot be performed. The naming context must be writable to create the replica.
0x0000206F ERROR_DS_ATT_NOT_DEF_IN_SCHEMA	A reference to an attribute that is not defined in the schema occurred.
0x00002070 ERROR_DS_MAX_OBJ_SIZE_EXCEEDED	The maximum size of an object has been exceeded.
0x00002071 ERROR_DS_OBJ_STRING_NAME_EXISTS	An attempt was made to add an object to the directory with a name that is already in use.
0x00002072 ERROR_DS_NO_RDN_DEFINED_IN_SCHEMA	An attempt was made to add an object of a class that does not have an RDN defined in the schema.
0x00002073 ERROR_DS_RDN_DOESNT_MATCH_SCHEMA	An attempt was made to add an object using an RDN that is not the RDN defined in the schema.
0x00002074 ERROR_DS_NO_REQUESTED_ATTS_FOUND	None of the requested attributes were found on the objects.
0x00002075 ERROR_DS_USER_BUFFER_TOO_SMALL	The user buffer is too small.
0x00002076 ERROR_DS_ATT_IS_NOT_ON_OBJ	The attribute specified in the operation is not present on the object.
0x00002077 ERROR_DS_ILLEGAL_MOD_OPERATION	Illegal modify operation. Some aspect of the modification is not permitted.
0x00002078 ERROR_DS_OBJ_TOO_LARGE	The specified object is too large.
0x00002079 ERROR_DS_BAD_INSTANCE_TYPE	The specified instance type is not valid.
0x0000207A ERROR_DS_MASTERDSA_REQUIRED	The operation must be performed at a master DSA.
0x0000207B ERROR_DS_OBJECT_CLASS_REQUIRED	The object class attribute must be specified.

<b>Win32 error codes</b>	<b>Description</b>
0x0000207C ERROR_DS_MISSING_REQUIRED_ATT	A required attribute is missing.
0x0000207D ERROR_DS_ATT_NOT_DEF_FOR_CLASS	An attempt was made to modify an object to include an attribute that is not legal for its class.
0x0000207E ERROR_DS_ATT_ALREADY_EXISTS	The specified attribute is already present on the object.
0x00002080 ERROR_DS_CANT_ADD_ATT_VALUES	The specified attribute is not present, or has no values.
0x00002081 ERROR_DS_SINGLE_VALUE_CONSTRAINT	Multiple values were specified for an attribute that can have only one value.
0x00002082 ERROR_DS_RANGE_CONSTRAINT	A value for the attribute was not in the acceptable range of values.
0x00002083 ERROR_DS_ATT_VAL_ALREADY_EXISTS	The specified value already exists.
0x00002084 ERROR_DS_CANT_REM_MISSING_ATT	The attribute cannot be removed because it is not present on the object.
0x00002085 ERROR_DS_CANT_REM_MISSING_ATT_VAL	The attribute value cannot be removed because it is not present on the object.
0x00002086 ERROR_DS_ROOT_CANT_BE_SUBREF	The specified root object cannot be a subreference.
0x00002087 ERROR_DS_NO_CHAINING	Chaining is not permitted.
0x00002088 ERROR_DS_NO_CHAINED_EVAL	Chained evaluation is not permitted.
0x00002089 ERROR_DS_NO_PARENT_OBJECT	The operation could not be performed because the object's parent is either uninstantiated or deleted.
0x0000208A ERROR_DS_PARENT_IS_AN_ALIAS	Having a parent that is an alias is not permitted. Aliases are leaf objects.
0x0000208B ERROR_DS_CANT_MIX_MASTER_AND_REPS	The object and parent must be of the same type, either both masters or both replicas.
0x0000208C ERROR_DS_CHILDREN_EXIST	The operation cannot be performed because child objects exist. This operation can only be performed on a leaf object.
0x0000208D	Directory object not found.

<b>Win32 error codes</b>	<b>Description</b>
ERROR_DS_OBJ_NOT_FOUND	
0x0000208E ERROR_DS_ALIASED_OBJ_MISSING	The aliased object is missing.
0x0000208F ERROR_DS_BAD_NAME_SYNTAX	The object name has bad syntax.
0x00002090 ERROR_DS_ALIAS_POINTS_TO_ALIAS	An alias is not permitted to refer to another alias.
0x00002091 ERROR_DS_CANT_DEREF_ALIAS	The alias cannot be dereferenced.
0x00002092 ERROR_DS_OUT_OF_SCOPE	The operation is out of scope.
0x00002093 ERROR_DS_OBJECT_BEING_REMOVED	The operation cannot continue because the object is in the process of being removed.
0x00002094 ERROR_DS_CANT_DELETE_DSA_OBJ	The DSA object cannot be deleted.
0x00002095 ERROR_DS_GENERIC_ERROR	A directory service error has occurred.
0x00002096 ERROR_DS_DSA_MUST_BE_INT_MASTER	The operation can only be performed on an internal master DSA object.
0x00002097 ERROR_DS_CLASS_NOT_DSA	The object must be of class DSA.
0x00002098 ERROR_DS_INSUFF_ACCESS_RIGHTS	Insufficient access rights to perform the operation.
0x00002099 ERROR_DS_ILLEGAL_SUPERIOR	The object cannot be added because the parent is not on the list of possible superiors.
0x0000209A ERROR_DS_ATTRIBUTE_OWNED_BY_SAM	Access to the attribute is not permitted because the attribute is owned by the SAM.
0x0000209B ERROR_DS_NAME_TOO_MANY_PARTS	The name has too many parts.
0x0000209C ERROR_DS_NAME_TOO_LONG	The name is too long.
0x0000209D ERROR_DS_NAME_VALUE_TOO_LONG	The name value is too long.
0x0000209E ERROR_DS_NAME_UNPARSEABLE	The directory service encountered an error parsing a name.
0x0000209F	The directory service cannot get

<b>Win32 error codes</b>	<b>Description</b>
ERROR_DS_NAME_TYPE_UNKNOWN	the attribute type for a name.
0x000020A0 ERROR_DS_NOT_AN_OBJECT	The name does not identify an object; the name identifies a phantom.
0x000020A1 ERROR_DS_SEC_DESC_TOO_SHORT	The security descriptor is too short.
0x000020A2 ERROR_DS_SEC_DESC_INVALID	The security descriptor is invalid.
0x000020A3 ERROR_DS_NO_DELETED_NAME	Failed to create name for deleted object.
0x000020A4 ERROR_DS_SUBREF_MUST_HAVE_PARENT	The parent of a new subreference must exist.
0x000020A5 ERROR_DS_NCNAME_MUST_BE_NC	The object must be a naming context.
0x000020A6 ERROR_DS_CANT_ADD_SYSTEM_ONLY	It is not permitted to add an attribute that is owned by the system.
0x000020A7 ERROR_DS_CLASS_MUST_BE_CONCRETE	The class of the object must be structural; you cannot instantiate an abstract class.
0x000020A8 ERROR_DS_INVALID_DMD	The schema object could not be found.
0x000020A9 ERROR_DS_OBJ_GUID_EXISTS	A local object with this GUID (dead or alive) already exists.
0x000020AA ERROR_DS_NOT_ON_BACKLINK	The operation cannot be performed on a back link.
0x000020AB ERROR_DS_NO_CROSSREF_FOR_NC	The cross-reference for the specified naming context could not be found.
0x000020AC ERROR_DS_SHUTTING_DOWN	The operation could not be performed because the directory service is shutting down.
0x000020AD ERROR_DS_UNKNOWN_OPERATION	The directory service request is invalid.
0x000020AE ERROR_DS_INVALID_ROLE_OWNER	The role owner attribute could not be read.
0x000020AF ERROR_DS_COULDNT_CONTACT_FSMO	The requested Flexible Single Master Operations (FSMO) operation failed. The current FSMO holder could not be contacted.
0x000020B0 ERROR_DS_CROSS_NC_DN_RENAME	Modification of a distinguished name across a naming context is

<b>Win32 error codes</b>	<b>Description</b>
	not permitted.
0x000020B1 ERROR_DS_CANT_MOD_SYSTEM_ONLY	The attribute cannot be modified because it is owned by the system.
0x000020B2 ERROR_DS_REPLICATOR_ONLY	Only the replicator can perform this function.
0x000020B3 ERROR_DS_OBJ_CLASS_NOT_DEFINED	The specified class is not defined.
0x000020B4 ERROR_DS_OBJ_CLASS_NOT_SUBCLASS	The specified class is not a subclass.
0x000020B5 ERROR_DS_NAME_REFERENCE_INVALID	The name reference is invalid.
0x000020B6 ERROR_DS_CROSS_REF_EXISTS	A cross-reference already exists.
0x000020B7 ERROR_DS_CANT_DEL_MASTER_CROSSREF	It is not permitted to delete a master cross-reference.
0x000020B8 ERROR_DS_SUBTREE_NOTIFY_NOT_NC_HEAD	Subtree notifications are only supported on naming context (NC) heads.
0x000020B9 ERROR_DS_NOTIFY_FILTER_TOO_COMPLEX	Notification filter is too complex.
0x000020BA ERROR_DS_DUP_RDN	Schema update failed: Duplicate RDN.
0x000020BB ERROR_DS_DUP_OID	Schema update failed: Duplicate OID.
0x000020BC ERROR_DS_DUP_MAPI_ID	Schema update failed: Duplicate Message Application Programming Interface (MAPI) identifier.
0x000020BD ERROR_DS_DUP_SCHEMA_ID_GUID	Schema update failed: Duplicate schema ID GUID.
0x000020BE ERROR_DS_DUP_LDAP_DISPLAY_NAME	Schema update failed: Duplicate LDAP display name.
0x000020BF ERROR_DS_SEMANTIC_ATT_TEST	Schema update failed: Range-Lower less than Range-Upper.
0x000020C0 ERROR_DS_SYNTAX_MISMATCH	Schema update failed: Syntax mismatch.
0x000020C1 ERROR_DS_EXISTS_IN_MUST_HAVE	Schema deletion failed: Attribute is used in the Must-Contain list.
0x000020C2	Schema deletion failed: Attribute is used in the May-Contain list.

<b>Win32 error codes</b>	<b>Description</b>
ERROR_DS_EXISTS_IN_MAY_HAVE	
0x000020C3 ERROR_DS_NONEXISTENT_MAY_HAVE	Schema update failed: Attribute in May-Contain list does not exist.
0x000020C4 ERROR_DS_NONEXISTENT_MUST_HAVE	Schema update failed: Attribute in the Must-Contain list does not exist.
0x000020C5 ERROR_DS_AUX_CLS_TEST_FAIL	Schema update failed: Class in the Aux Class list does not exist or is not an auxiliary class.
0x000020C6 ERROR_DS_NONEXISTENT_POSS_SUP	Schema update failed: Class in the Poss-Superiors list does not exist.
0x000020C7 ERROR_DS_SUB_CLS_TEST_FAIL	Schema update failed: Class in the subclass of the list does not exist or does not satisfy hierarchy rules.
0x000020C8 ERROR_DS_BAD_RDN_ATT_ID_SYNTAX	Schema update failed: Rdn-Att-Id has wrong syntax.
0x000020C9 ERROR_DS_EXISTS_IN_AUX_CLS	Schema deletion failed: Class is used as an auxiliary class.
0x000020CA ERROR_DS_EXISTS_IN_SUB_CLS	Schema deletion failed: Class is used as a subclass.
0x000020CB ERROR_DS_EXISTS_IN_POSS_SUP	Schema deletion failed: Class is used as a Poss-Superior.
0x000020CC ERROR_DS_RECALCSHEMA_FAILED	Schema update failed in recalculating validation cache.
0x000020CD ERROR_DS_TREE_DELETE_NOT_FINISHED	The tree deletion is not finished. The request must be made again to continue deleting the tree.
0x000020CE ERROR_DS_CANT_DELETE	The requested delete operation could not be performed.
0x000020CF ERROR_DS_ATT_SCHEMA_REQ_ID	Cannot read the governs class identifier for the schema record.
0x000020D0 ERROR_DS_BAD_ATT_SCHEMA_SYNTAX	The attribute schema has bad syntax.
0x000020D1 ERROR_DS_CANT_CACHE_ATT	The attribute could not be cached.
0x000020D2 ERROR_DS_CANT_CACHE_CLASS	The class could not be cached.
0x000020D3 ERROR_DS_CANT_REMOVE_ATT_CACHE	The attribute could not be removed from the cache.

Win32 error codes	Description
0x000020D4 ERROR_DS_CANT_REMOVE_CLASS_CACHE	The class could not be removed from the cache.
0x000020D5 ERROR_DS_CANT_RETRIEVE_DN	The distinguished name attribute could not be read.
0x000020D6 ERROR_DS_MISSING_SUPREF	No superior reference has been configured for the directory service. The directory service is, therefore, unable to issue referrals to objects outside this forest.
0x000020D7 ERROR_DS_CANT_RETRIEVE_INSTANCE	The instance type attribute could not be retrieved.
0x000020D8 ERROR_DS_CODE_INCONSISTENCY	An internal error has occurred.
0x000020D9 ERROR_DS_DATABASE_ERROR	A database error has occurred.
0x000020DA ERROR_DS_GOVERNSID_MISSING	The <b>governSID</b> attribute is missing.
0x000020DB ERROR_DS_MISSING_EXPECTED_ATT	An expected attribute is missing.
0x000020DC ERROR_DS_NCNAME_MISSING_CR_REF	The specified naming context is missing a cross-reference.
0x000020DD ERROR_DS_SECURITY_CHECKING_ERROR	A security checking error has occurred.
0x000020DE ERROR_DS_SCHEMA_NOT_LOADED	The schema is not loaded.
0x000020DF ERROR_DS_SCHEMA_ALLOC_FAILED	Schema allocation failed. Check if the machine is running low on memory.
0x000020E0 ERROR_DS_ATT_SCHEMA_REQ_SYNTAX	Failed to obtain the required syntax for the attribute schema.
0x000020E1 ERROR_DS_GCVERIFY_ERROR	The GC verification failed. The GC is not available or does not support the operation. Some part of the directory is currently not available.
0x000020E2 ERROR_DS_DRA_SCHEMA_MISMATCH	The replication operation failed because of a schema mismatch between the servers involved.
0x000020E3 ERROR_DS_CANT_FIND_DSA_OBJ	The DSA object could not be found.
0x000020E4 ERROR_DS_CANT_FIND_EXPECTED_NC	The naming context could not be found.

<b>Win32 error codes</b>	<b>Description</b>
0x000020E5 ERROR_DS_CANT_FIND_NC_IN_CACHE	The naming context could not be found in the cache.
0x000020E6 ERROR_DS_CANT_RETRIEVE_CHILD	The child object could not be retrieved.
0x000020E7 ERROR_DS_SECURITY_ILLEGAL_MODIFY	The modification was not permitted for security reasons.
0x000020E8 ERROR_DS_CANT_REPLACE_HIDDEN_REC	The operation cannot replace the hidden record.
0x000020E9 ERROR_DS_BAD_HIERARCHY_FILE	The hierarchy file is invalid.
0x000020EA ERROR_DS_BUILD_HIERARCHY_TABLE_FAILED	The attempt to build the hierarchy table failed.
0x000020EB ERROR_DS_CONFIG_PARAM_MISSING	The directory configuration parameter is missing from the registry.
0x000020EC ERROR_DS_COUNTING_AB_INDICES_FAILED	The attempt to count the address book indices failed.
0x000020ED ERROR_DS_HIERARCHY_TABLE_MALLOC_FAILED	The allocation of the hierarchy table failed.
0x000020EE ERROR_DS_INTERNAL_FAILURE	The directory service encountered an internal failure.
0x000020EF ERROR_DS_UNKNOWN_ERROR	The directory service encountered an unknown failure.
0x000020F0 ERROR_DS_ROOT_REQUIRES_CLASS_TOP	A root object requires a class of "top".
0x000020F1 ERROR_DS_REFUSING_FSMO_ROLES	This directory server is shutting down, and cannot take ownership of new floating single-master operation roles.
0x000020F2 ERROR_DS_MISSING_FSMO_SETTINGS	The directory service is missing mandatory configuration information and is unable to determine the ownership of floating single-master operation roles.
0x000020F3 ERROR_DS_UNABLE_TO_SURRENDER_ROLES	The directory service was unable to transfer ownership of one or more floating single-master operation roles to other servers.
0x000020F4 ERROR_DS_DRA_GENERIC	The replication operation failed.
0x000020F5 ERROR_DS_DRA_INVALID_PARAMETER	An invalid parameter was specified for this replication

<b>Win32 error codes</b>	<b>Description</b>
	operation.
0x000020F6 ERROR_DS_DRA_BUSY	The directory service is too busy to complete the replication operation at this time.
0x000020F7 ERROR_DS_DRA_BAD_DN	The DN specified for this replication operation is invalid.
0x000020F8 ERROR_DS_DRA_BAD_NC	The naming context specified for this replication operation is invalid.
0x000020F9 ERROR_DS_DRA_DN_EXISTS	The DN specified for this replication operation already exists.
0x000020FA ERROR_DS_DRA_INTERNAL_ERROR	The replication system encountered an internal error.
0x000020FB ERROR_DS_DRA_INCONSISTENT_DIT	The replication operation encountered a database inconsistency.
0x000020FC ERROR_DS_DRA_CONNECTION_FAILED	The server specified for this replication operation could not be contacted.
0x000020FD ERROR_DS_DRA_BAD_INSTANCE_TYPE	The replication operation encountered an object with an invalid instance type.
0x000020FE ERROR_DS_DRA_OUT_OF_MEM	The replication operation failed to allocate memory.
0x000020FF ERROR_DS_DRA_MAIL_PROBLEM	The replication operation encountered an error with the mail system.
0x00002100 ERROR_DS_DRA_REF_ALREADY_EXISTS	The replication reference information for the target server already exists.
0x00002101 ERROR_DS_DRA_REF_NOT_FOUND	The replication reference information for the target server does not exist.
0x00002102 ERROR_DS_DRA_OBJ_IS_REP_SOURCE	The naming context cannot be removed because it is replicated to another server.
0x00002103 ERROR_DS_DRA_DB_ERROR	The replication operation encountered a database error.
0x00002104 ERROR_DS_DRA_NO_REPLICA	The naming context is in the process of being removed or is not replicated from the specified server.
0x00002105 ERROR_DS_DRA_ACCESS_DENIED	Replication access was denied.

<b>Win32 error codes</b>	<b>Description</b>
0x00002106 ERROR_DS_DRA_NOT_SUPPORTED	The requested operation is not supported by this version of the directory service.
0x00002107 ERROR_DS_DRA_RPC_CANCELLED	The replication RPC was canceled.
0x00002108 ERROR_DS_DRA_SOURCE_DISABLED	The source server is currently rejecting replication requests.
0x00002109 ERROR_DS_DRA_SINK_DISABLED	The destination server is currently rejecting replication requests.
0x0000210A ERROR_DS_DRA_NAME_COLLISION	The replication operation failed due to a collision of object names.
0x0000210B ERROR_DS_DRA_SOURCE_REINSTALLED	The replication source has been reinstalled.
0x0000210C ERROR_DS_DRA_MISSING_PARENT	The replication operation failed because a required parent object is missing.
0x0000210D ERROR_DS_DRA_PREEMPTED	The replication operation was preempted.
0x0000210E ERROR_DS_DRA_ABANDON_SYNC	The replication synchronization attempt was abandoned because of a lack of updates.
0x0000210F ERROR_DS_DRA_SHUTDOWN	The replication operation was terminated because the system is shutting down.
0x00002110 ERROR_DS_DRA_INCOMPATIBLE_PARTIAL_SET	A synchronization attempt failed because the destination DC is currently waiting to synchronize new partial attributes from the source. This condition is normal if a recent schema change modified the partial attribute set. The destination partial attribute set is not a subset of the source partial attribute set.
0x00002111 ERROR_DS_DRA_SOURCE_IS_PARTIAL_REPLICA	The replication synchronization attempt failed because a master replica attempted to sync from a partial replica.
0x00002112 ERROR_DS_DRA_EXTN_CONNECTION_FAILED	The server specified for this replication operation was contacted, but that server was unable to contact an additional server needed to complete the operation.
0x00002113 ERROR_DS_INSTALL_SCHEMA_MISMATCH	The version of the directory service schema of the source forest is not compatible with the

Win32 error codes	Description
	version of the directory service on this computer.
0x00002114 ERROR_DS_DUP_LINK_ID	Schema update failed: An attribute with the same link identifier already exists.
0x00002115 ERROR_DS_NAME_ERROR_RESOLVING	Name translation: Generic processing error.
0x00002116 ERROR_DS_NAME_ERROR_NOT_FOUND	Name translation: Could not find the name or insufficient right to see name.
0x00002117 ERROR_DS_NAME_ERROR_NOT_UNIQUE	Name translation: Input name mapped to more than one output name.
0x00002118 ERROR_DS_NAME_ERROR_NO_MAPPING	Name translation: The input name was found but not the associated output format.
0x00002119 ERROR_DS_NAME_ERROR_DOMAIN_ONLY	Name translation: Unable to resolve completely, only the domain was found.
0x0000211A ERROR_DS_NAME_ERROR_NO_SYNTACTICAL_MAPPING	Name translation: Unable to perform purely syntactical mapping at the client without going out to the wire.
0x0000211B ERROR_DS_CONSTRUCTED_ATT_MOD	Modification of a constructed attribute is not allowed.
0x0000211C ERROR_DS_WRONG_OM_OBJ_CLASS	The OM-Object-Class specified is incorrect for an attribute with the specified syntax.
0x0000211D ERROR_DS_DRA_REPL_PENDING	The replication request has been posted; waiting for a reply.
0x0000211E ERROR_DS_DS_REQUIRED	The requested operation requires a directory service, and none was available.
0x0000211F ERROR_DS_INVALID_LDAP_DISPLAY_NAME	The LDAP display name of the class or attribute contains non-ASCII characters.
0x00002120 ERROR_DS_NON_BASE_SEARCH	The requested search operation is only supported for base searches.
0x00002121 ERROR_DS_CANT_RETRIEVE_ATTS	The search failed to retrieve attributes from the database.
0x00002122 ERROR_DS_BACKLINK_WITHOUT_LINK	The schema update operation tried to add a backward link attribute that has no corresponding forward link.
0x00002123	The source and destination of a

Win32 error codes	Description
ERROR_DS_EPOCH_MISMATCH	cross-domain move do not agree on the object's epoch number. Either the source or the destination does not have the latest version of the object.
0x00002124 ERROR_DS_SRC_NAME_MISMATCH	The source and destination of a cross-domain move do not agree on the object's current name. Either the source or the destination does not have the latest version of the object.
0x00002125 ERROR_DS_SRC_AND_DST_NC_IDENTICAL	The source and destination for the cross-domain move operation are identical. The caller should use a local move operation instead of a cross-domain move operation.
0x00002126 ERROR_DS_DST_NC_MISMATCH	The source and destination for a cross-domain move do not agree on the naming contexts in the forest. Either the source or the destination does not have the latest version of the Partitions container.
0x00002127 ERROR_DS_NOT_AUTHORITY_FOR_DST_NC	The destination of a cross-domain move is not authoritative for the destination naming context.
0x00002128 ERROR_DS_SRC_GUID_MISMATCH	The source and destination of a cross-domain move do not agree on the identity of the source object. Either the source or the destination does not have the latest version of the source object.
0x00002129 ERROR_DS_CANT_MOVE_DELETED_OBJECT	The object being moved across domains is already known to be deleted by the destination server. The source server does not have the latest version of the source object.
0x0000212A ERROR_DS_PDC_OPERATION_IN_PROGRESS	Another operation that requires exclusive access to the PDC FSMO is already in progress.
0x0000212B ERROR_DS_CROSS_DOMAIN_CLEANUP_REQD	A cross-domain move operation failed because two versions of the moved object exist—one each in the source and destination domains. The destination object needs to be removed to restore the system to a consistent state.
0x0000212C	This object <del>may not</del> cannot be moved across domain

Win32 error codes	Description
ERROR_DS_ILLEGAL_XDOM_MOVE_OPERATION	boundaries either because cross-domain moves for this class are not allowed, or the object has some special characteristics, for example, a trust account or a restricted relative identifier (RID), that prevent its move.
0x0000212D ERROR_DS_CANT_WITH_ACCT_GROUP_MEMBERSHPS	Cannot move objects with memberships across domain boundaries because, once moved, this violates the membership conditions of the account group. Remove the object from any account group memberships and retry.
0x0000212E ERROR_DS_NC_MUST_HAVE_NC_PARENT	A naming context head must be the immediate child of another naming context head, not of an interior node.
0x0000212F ERROR_DS_CR_IMPOSSIBLE_TO_VALIDATE	The directory cannot validate the proposed naming context name because it does not hold a replica of the naming context above the proposed naming context. Ensure that the domain naming master role is held by a server that is configured as a GC server, and that the server is up-to-date with its replication partners. (Applies only to Windows 2000 operating system domain naming masters.)
0x00002130 ERROR_DS_DST_DOMAIN_NOT_NATIVE	Destination domain must be in native mode.
0x00002131 ERROR_DS_MISSING_INFRASTRUCTURE_CONTAINER	The operation cannot be performed because the server does not have an infrastructure container in the domain of interest.
0x00002132 ERROR_DS_CANT_MOVE_ACCOUNT_GROUP	Cross-domain moves of nonempty account groups is not allowed.
0x00002133 ERROR_DS_CANT_MOVE_RESOURCE_GROUP	Cross-domain moves of nonempty resource groups is not allowed.
0x00002134 ERROR_DS_INVALID_SEARCH_FLAG	The search flags for the attribute are invalid. The ambiguous name resolution (ANR) bit is valid only on attributes of Unicode or Teletex strings.
0x00002135 ERROR_DS_NO_TREE_DELETE_ABOVE_NC	Tree deletions starting at an object that has an NC head as a descendant are not allowed.

Win32 error codes	Description
0x00002136 ERROR_DS_COULDNT_LOCK_TREE_FOR_DELETE	The directory service failed to lock a tree in preparation for a tree deletion because the tree was in use.
0x00002137 ERROR_DS_COULDNT_IDENTIFY_OBJECTS_FOR_TREE_DELETE	The directory service failed to identify the list of objects to delete while attempting a tree deletion.
0x00002138 ERROR_DS_SAM_INIT_FAILURE	SAM initialization failed because of the following error: %1. Error Status: 0x%2. Click OK to shut down the system and reboot into Directory Services Restore Mode. Check the event log for detailed information.
0x00002139 ERROR_DS_SENSITIVE_GROUP_VIOLATION	Only an administrator can modify the membership list of an administrative group.
0x0000213A ERROR_DS_CANT_MOD_PRIMARYGROUPID	Cannot change the primary group ID of a domain controller account.
0x0000213B ERROR_DS_ILLEGAL_BASE_SCHEMA_MOD	An attempt was made to modify the base schema.
0x0000213C ERROR_DS_NONSAFE_SCHEMA_CHANGE	Adding a new mandatory attribute to an existing class, deleting a mandatory attribute from an existing class, or adding an optional attribute to the special class Top that is not a backlink attribute (directly or through inheritance, for example, by adding or deleting an auxiliary class) is not allowed.
0x0000213D ERROR_DS_SCHEMA_UPDATE_DISALLOWED	Schema update is not allowed on this DC because the DC is not the schema FSMO role owner.
0x0000213E ERROR_DS_CANT_CREATE_UNDER_SCHEMA	An object of this class cannot be created under the schema container. You can only create Attribute-Schema and Class-Schema objects under the schema container.
0x0000213F ERROR_DS_INSTALL_NO_SRC_SCH_VERSION	The replica or child install failed to get the <b>objectVersion</b> attribute on the schema container on the source DC. Either the attribute is missing on the schema container or the credentials supplied do not have permission to read it.
0x00002140 ERROR_DS_INSTALL_NO_SCH_VERSION_IN_INIFILE	The replica or child install failed to read the <b>objectVersion</b>

<b>Win32 error codes</b>	<b>Description</b>
	attribute in the SCHEMA section of the file schema.ini in the System32 directory.
0x00002141 ERROR_DS_INVALID_GROUP_TYPE	The specified group type is invalid.
0x00002142 ERROR_DS_NO_NEST_GLOBALGROUP_IN_MIXEDDOMAIN	You cannot nest global groups in a mixed domain if the group is security-enabled.
0x00002143 ERROR_DS_NO_NEST_LOCALGROUP_IN_MIXEDDOMAIN	You cannot nest local groups in a mixed domain if the group is security-enabled.
0x00002144 ERROR_DS_GLOBAL_CANT_HAVE_LOCAL_MEMBER	A global group cannot have a local group as a member.
0x00002145 ERROR_DS_GLOBAL_CANT_HAVE_UNIVERSAL_MEMBER	A global group cannot have a universal group as a member.
0x00002146 ERROR_DS_UNIVERSAL_CANT_HAVE_LOCAL_MEMBER	A universal group cannot have a local group as a member.
0x00002147 ERROR_DS_GLOBAL_CANT_HAVE_CROSSDOMAIN_MEMBER	A global group cannot have a cross-domain member.
0x00002148 ERROR_DS_LOCAL_CANT_HAVE_CROSSDOMAIN_LOCAL_MEMBER	A local group cannot have another cross domain local group as a member.
0x00002149 ERROR_DS_HAVE_PRIMARY_MEMBERS	A group with primary members cannot change to a security-disabled group.
0x0000214A ERROR_DS_STRING_SD_CONVERSION_FAILED	The schema cache load failed to convert the string default security descriptor (SD) on a class-schema object.
0x0000214B ERROR_DS_NAMING_MASTER_GC	Only DSAs configured to be GC servers should be allowed to hold the domain naming master FSMO role. (Applies only to Windows 2000 servers.)
0x0000214C ERROR_DS_DNS_LOOKUP_FAILURE	The DSA operation is unable to proceed because of a DNS lookup failure.
0x0000214D ERROR_DS_COULDNT_UPDATE_SPNS	While processing a change to the DNS host name for an object, the SPN values could not be kept in sync.
0x0000214E ERROR_DS_CANT_RETRIEVE_SD	The Security Descriptor attribute could not be read.
0x0000214F ERROR_DS_KEY_NOT_UNIQUE	The object requested was not found, but an object with that key was found.

Win32 error codes	Description
0x00002150 ERROR_DS_WRONG_LINKED_ATT_SYNTAX	The syntax of the linked attribute being added is incorrect. Forward links can only have syntax 2.5.5.1, 2.5.5.7, and 2.5.5.14, and backlinks can only have syntax 2.5.5.1.
0x00002151 ERROR_DS_SAM_NEED_BOOTKEY_PASSWORD	SAM needs to get the boot password.
0x00002152 ERROR_DS_SAM_NEED_BOOTKEY_FLOPPY	SAM needs to get the boot key from the floppy disk.
0x00002153 ERROR_DS_CANT_START	Directory Service cannot start.
0x00002154 ERROR_DS_INIT_FAILURE	Directory Services could not start.
0x00002155 ERROR_DS_NO_PKT_PRIVACY_ON_CONNECTION	The connection between client and server requires packet privacy or better.
0x00002156 ERROR_DS_SOURCE_DOMAIN_IN_FOREST	The source domain <del>may</del> <b>cannot</b> be in the same forest as the destination.
0x00002157 ERROR_DS_DESTINATION_DOMAIN_NOT_IN_FOREST	The destination domain <del>must</del> <b>MUST</b> be in the forest.
0x00002158 ERROR_DS_DESTINATION_AUDITING_NOT_ENABLED	The operation requires that destination domain auditing be enabled.
0x00002159 ERROR_DS_CANT_FIND_DC_FOR_SRC_DOMAIN	The operation could not locate a DC for the source domain.
0x0000215A ERROR_DS_SRC_OBJ_NOT_GROUP_OR_USER	The source object must be a group or user.
0x0000215B ERROR_DS_SRC_SID_EXISTS_IN_FOREST	The source object's SID already exists in the destination forest.
0x0000215C ERROR_DS_SRC_AND_DST_OBJECT_CLASS_MISMATCH	The source and destination object must be of the same type.
0x0000215D ERROR_SAM_INIT_FAILURE	SAM initialization failed because of the following error: %1. Error Status: 0x%2. Click OK to shut down the system and reboot into Safe Mode. Check the event log for detailed information.
0x0000215E ERROR_DS_DRA_SCHEMA_INFO_SHIP	Schema information could not be included in the replication request.
0x0000215F ERROR_DS_DRA_SCHEMA_CONFLICT	The replication operation could not be completed due to a schema incompatibility.

Win32 error codes	Description
0x00002160 ERROR_DS_DRA_EARLIER_SCHEMA_CONFLICT	The replication operation could not be completed due to a previous schema incompatibility.
0x00002161 ERROR_DS_DRA_OBJ_NC_MISMATCH	The replication update could not be applied because either the source or the destination has not yet received information regarding a recent cross-domain move operation.
0x00002162 ERROR_DS_NC_STILL_HAS_DSAS	The requested domain could not be deleted because there exist domain controllers that still host this domain.
0x00002163 ERROR_DS_GC_REQUIRED	The requested operation can be performed only on a GC server.
0x00002164 ERROR_DS_LOCAL_MEMBER_OF_LOCAL_ONLY	A local group can only be a member of other local groups in the same domain.
0x00002165 ERROR_DS_NO_FPO_IN_UNIVERSAL_GROUPS	Foreign security principals cannot be members of universal groups.
0x00002166 ERROR_DS_CANT_ADD_TO_GC	The attribute is not allowed to be replicated to the GC because of security reasons.
0x00002167 ERROR_DS_NO_CHECKPOINT_WITH_PDC	The checkpoint with the PDC could not be taken because too many modifications are currently being processed.
0x00002168 ERROR_DS_SOURCE_AUDITING_NOT_ENABLED	The operation requires that source domain auditing be enabled.
0x00002169 ERROR_DS_CANT_CREATE_IN_NONDOMAIN_NC	Security principal objects can only be created inside domain naming contexts.
0x0000216A ERROR_DS_INVALID_NAME_FOR_SPN	An SPN could not be constructed because the provided host name is not in the necessary format.
0x0000216B ERROR_DS_FILTER_USES_CONSTRUCTED_ATTRS	A filter was passed that uses constructed attributes.
0x0000216C ERROR_DS_UNICODEPWD_NOT_IN_QUOTES	The <b>unicodePwd</b> attribute value must be enclosed in quotation marks.
0x0000216D ERROR_DS_MACHINE_ACCOUNT_QUOTA_EXCEEDED	Your computer could not be joined to the domain. You have exceeded the maximum number of computer accounts you are allowed to create in this domain. Contact your system administrator to have this limit

Win32 error codes	Description
	reset or increased.
0x0000216E ERROR_DS_MUST_BE_RUN_ON_DST_DC	For security reasons, the operation must be run on the destination DC.
0x0000216F ERROR_DS_SRC_DC_MUST_BE_SP4_OR_GREATER	For security reasons, the source DC must be NT4SP4 or greater.
0x00002170 ERROR_DS_CANT_TREE_DELETE_CRITICAL_OBJ	Critical directory service system objects cannot be deleted during tree deletion operations. The tree deletion <b>may</b> have been partially performed.
0x00002171 ERROR_DS_INIT_FAILURE_CONSOLE	Directory Services could not start because of the following error: %1. Error Status: 0x%2. Click OK to shut down the system. You can use the Recovery Console to further diagnose the system.
0x00002172 ERROR_DS_SAM_INIT_FAILURE_CONSOLE	SAM initialization failed because of the following error: %1. Error Status: 0x%2. Click OK to shut down the system. You can use the Recovery Console to further diagnose the system.
0x00002173 ERROR_DS_FOREST_VERSION_TOO_HIGH	The version of the operating system installed is incompatible with the current forest functional level. You must upgrade to a new version of the operating system before this server can become a domain controller in this forest.
0x00002174 ERROR_DS_DOMAIN_VERSION_TOO_HIGH	The version of the operating system installed is incompatible with the current domain functional level. You must upgrade to a new version of the operating system before this server can become a domain controller in this domain.
0x00002175 ERROR_DS_FOREST_VERSION_TOO_LOW	The version of the operating system installed on this server no longer supports the current forest functional level. You must raise the forest functional level before this server can become a domain controller in this forest.
0x00002176 ERROR_DS_DOMAIN_VERSION_TOO_LOW	The version of the operating system installed on this server no longer supports the current domain functional level. You must raise the domain functional level before this server can become a domain controller in

Win32 error codes	Description
	this domain.
0x00002177 ERROR_DS_INCOMPATIBLE_VERSION	The version of the operating system installed on this server is incompatible with the functional level of the domain or forest.
0x00002178 ERROR_DS_LOW_DSA_VERSION	The functional level of the domain (or forest) cannot be raised to the requested value because one or more domain controllers in the domain (or forest) are at a lower, incompatible functional level.
0x00002179 ERROR_DS_NO_BEHAVIOR_VERSION_IN_MIXEDDOMAIN	The forest functional level cannot be raised to the requested value because one or more domains are still in mixed-domain mode. All domains in the forest must be in native mode for you to raise the forest functional level.
0x0000217A ERROR_DS_NOT_SUPPORTED_SORT_ORDER	The sort order requested is not supported.
0x0000217B ERROR_DS_NAME_NOT_UNIQUE	The requested name already exists as a unique identifier.
0x0000217C ERROR_DS_MACHINE_ACCOUNT_CREATED_PRENT4	The machine account was created before Windows NT 4.0. The account needs to be re-created.
0x0000217D ERROR_DS_OUT_OF_VERSION_STORE	The database is out of version store.
0x0000217E ERROR_DS_INCOMPATIBLE_CONTROLS_USED	Unable to continue operation because multiple conflicting controls were used.
0x0000217F ERROR_DS_NO_REF_DOMAIN	Unable to find a valid security descriptor reference domain for this partition.
0x00002180 ERROR_DS_RESERVED_LINK_ID	Schema update failed: The link identifier is reserved.
0x00002181 ERROR_DS_LINK_ID_NOT_AVAILABLE	Schema update failed: There are no link identifiers available.
0x00002182 ERROR_DS_AG_CANT_HAVE_UNIVERSAL_MEMBER	An account group cannot have a universal group as a member.
0x00002183 ERROR_DS_MODIFYDN_DISALLOWED_BY_INSTANCE_TYPE	Rename or move operations on naming context heads or read-only objects are not allowed.
0x00002184 ERROR_DS_NO_OBJECT_MOVE_IN_SCHEMA_NC	Move operations on objects in the schema naming context are not allowed.

Win32 error codes	Description
0x00002185 ERROR_DS_MODIFYDN_DISALLOWED_BY_FLAG	A system flag has been set on the object that does not allow the object to be moved or renamed.
0x00002186 ERROR_DS_MODIFYDN_WRONG_GRANDPARENT	This object is not allowed to change its grandparent container. Moves are not forbidden on this object, but are restricted to sibling containers.
0x00002187 ERROR_DS_NAME_ERROR_TRUST_REFERRAL	Unable to resolve completely; a referral to another forest was generated.
0x00002188 ERROR_NOT_SUPPORTED_ON_STANDARD_SERVER	The requested action is not supported on a standard server.
0x00002189 ERROR_DS_CANT_ACCESS_REMOTE_PART_OF_AD	Could not access a partition of the directory service located on a remote server. Make sure at least one server is running for the partition in question.
0x0000218A ERROR_DS_CR_IMPOSSIBLE_TO_VALIDATE_V2	The directory cannot validate the proposed naming context (or partition) name because it does not hold a replica, nor can it contact a replica of the naming context above the proposed naming context. Ensure that the parent naming context is properly registered in the DNS, and at least one replica of this naming context is reachable by the domain naming master.
0x0000218B ERROR_DS_THREAD_LIMIT_EXCEEDED	The thread limit for this request was exceeded.
0x0000218C ERROR_DS_NOT_CLOSEST	The GC server is not in the closest site.
0x0000218D ERROR_DS_CANT_DERIVE_SPN_WITHOUT_SERVER_REF	The directory service cannot derive an SPN with which to mutually authenticate the target server because the corresponding server object in the local DS database has no <b>serverReference</b> attribute.
0x0000218E ERROR_DS_SINGLE_USER_MODE_FAILED	The directory service failed to enter single-user mode.
0x0000218F ERROR_DS_NTDSRIPT_SYNTAX_ERROR	The directory service cannot parse the script because of a syntax error.
0x00002190 ERROR_DS_NTDSRIPT_PROCESS_ERROR	The directory service cannot process the script because of an error.

Win32 error codes	Description
0x00002191 ERROR_DS_DIFFERENT_REPL_EPOCHS	The directory service cannot perform the requested operation because the servers involved are of different replication epochs (which is usually related to a domain rename that is in progress).
0x00002192 ERROR_DS_DRS_EXTENSIONS_CHANGED	The directory service binding must be renegotiated due to a change in the server extensions information.
0x00002193 ERROR_DS_REPLICA_SET_CHANGE_NOT_ALLOWED_ON_DISABLED_CR	The operation is not allowed on a disabled cross-reference.
0x00002194 ERROR_DS_NO_MSDS_INTID	Schema update failed: No values for msDS-IntId are available.
0x00002195 ERROR_DS_DUP_MSDS_INTID	Schema update failed: Duplicate msDS-IntId. Retry the operation.
0x00002196 ERROR_DS_EXISTS_IN_RDNATTID	Schema deletion failed: Attribute is used in rDNAttID.
0x00002197 ERROR_DS_AUTHORIZATION_FAILED	The directory service failed to authorize the request.
0x00002198 ERROR_DS_INVALID_SCRIPT	The directory service cannot process the script because it is invalid.
0x00002199 ERROR_DS_REMOTE_CROSSREF_OP_FAILED	The remote create cross-reference operation failed on the domain naming master FSMO. The operation's error is in the extended data.
0x0000219A ERROR_DS_CROSS_REF_BUSY	A cross-reference is in use locally with the same name.
0x0000219B ERROR_DS_CANT_DERIVE_SPN_FOR_DELETED_DOMAIN	The directory service cannot derive an SPN with which to mutually authenticate the target server because the server's domain has been deleted from the forest.
0x0000219C ERROR_DS_CANT_DEMOTE_WITH_WRITEABLE_NC	Writable NCs prevent this DC from demoting.
0x0000219D ERROR_DS_DUPLICATE_ID_FOUND	The requested object has a nonunique identifier and cannot be retrieved.
0x0000219E ERROR_DS_INSUFFICIENT_ATTR_TO_CREATE_OBJECT	Insufficient attributes were given to create an object. This object <del>may</del> might not exist because it <del>may</del> might have been deleted and the garbage already

Win32 error codes	Description
	collected.
0x0000219F ERROR_DS_GROUP_CONVERSION_ERROR	The group cannot be converted due to attribute restrictions on the requested group type.
0x000021A0 ERROR_DS_CANT_MOVE_APP_BASIC_GROUP	Cross-domain moves of nonempty basic application groups is not allowed.
0x000021A1 ERROR_DS_CANT_MOVE_APP_QUERY_GROUP	Cross-domain moves of nonempty query-based application groups is not allowed.
0x000021A2 ERROR_DS_ROLE_NOT_VERIFIED	The FSMO role ownership could not be verified because its directory partition did not replicate successfully with at least one replication partner.
0x000021A3 ERROR_DS_WKO_CONTAINER_CANNOT_BE_SPECIAL	The target container for a redirection of a well-known object container cannot already be a special container.
0x000021A4 ERROR_DS_DOMAIN_RENAME_IN_PROGRESS	The directory service cannot perform the requested operation because a domain rename operation is in progress.
0x000021A5 ERROR_DS_EXISTING_AD_CHILD_NC	The directory service detected a child partition below the requested partition name. The partition hierarchy must be created in a top down method.
0x000021A6 ERROR_DS_REPL_LIFETIME_EXCEEDED	The directory service cannot replicate with this server because the time since the last replication with this server has exceeded the tombstone lifetime.
0x000021A7 ERROR_DS_DISALLOWED_IN_SYSTEM_CONTAINER	The requested operation is not allowed on an object under the system container.
0x000021A8 ERROR_DS_LDAP_SEND_QUEUE_FULL	The LDAP server's network send queue has filled up because the client is not processing the results of its requests fast enough. No more requests will be processed until the client catches up. If the client does not catch up then it will be disconnected.
0x000021A9 ERROR_DS_DRA_OUT_SCHEDULE_WINDOW	The scheduled replication did not take place because the system was too busy to execute the request within the schedule window. The replication queue is

Win32 error codes	Description
	overloaded. Consider reducing the number of partners or decreasing the scheduled replication frequency.
0x000021AA ERROR_DS_POLICY_NOT_KNOWN	At this time, it cannot be determined if the branch replication policy is available on the hub domain controller. Retry at a later time to account for replication latencies.
0x000021AB ERROR_NO_SITE_SETTINGS_OBJECT	The site settings object for the specified site does not exist.
0x000021AC ERROR_NO_SECRETS	The local account store does not contain secret material for the specified account.
0x000021AD ERROR_NO_WRITABLE_DC_FOUND	Could not find a writable domain controller in the domain.
0x000021AE ERROR_DS_NO_SERVER_OBJECT	The server object for the domain controller does not exist.
0x000021AF ERROR_DS_NO_NTDSA_OBJECT	The NTDS Settings object for the domain controller does not exist.
0x000021B0 ERROR_DS_NON_ASQ_SEARCH	The requested search operation is not supported for attribute scoped query (ASQ) searches.
0x000021B1 ERROR_DS_AUDIT_FAILURE	A required audit event could not be generated for the operation.
0x000021B2 ERROR_DS_INVALID_SEARCH_FLAG_SUBTREE	The search flags for the attribute are invalid. The subtree index bit is valid only on single-valued attributes.
0x000021B3 ERROR_DS_INVALID_SEARCH_FLAG_TUPLE	The search flags for the attribute are invalid. The tuple index bit is valid only on attributes of Unicode strings.
0x000021C2 ERROR_DS_HIGH_DSA_VERSION	The functional level of the domain (or forest) cannot be lowered to the requested value.
0x000021C7 ERROR_DS_SPN_VALUE_NOT_UNIQUE_IN_FOREST	The operation failed because the SPN value provided for addition/modification is not unique forest-wide.
0x000021C8 ERROR_DS_UPN_VALUE_NOT_UNIQUE_IN_FOREST	The operation failed because the UPN value provided for addition/modification is not unique forest-wide.
0x00002329 DNS_ERROR_RCODE_FORMAT_ERROR	DNS server unable to interpret format.

<b>Win32 error codes</b>	<b>Description</b>
0x0000232A DNS_ERROR_RCODE_SERVER_FAILURE	DNS server failure.
0x0000232B DNS_ERROR_RCODE_NAME_ERROR	DNS name does not exist.
0x0000232C DNS_ERROR_RCODE_NOT_IMPLEMENTED	DNS request not supported by name server.
0x0000232D DNS_ERROR_RCODE_REFUSED	DNS operation refused.
0x0000232E DNS_ERROR_RCODE_YXDOMAIN	DNS name that should not exist, does exist.
0x0000232F DNS_ERROR_RCODE_YXRRSET	DNS resource record (RR) set that should not exist, does exist.
0x00002330 DNS_ERROR_RCODE_NXRRSET	DNS RR set that should to exist, does not exist.
0x00002331 DNS_ERROR_RCODE_NOTAUTH	DNS server not authoritative for zone.
0x00002332 DNS_ERROR_RCODE_NOTZONE	DNS name in update or prereq is not in zone.
0x00002338 DNS_ERROR_RCODE_BADSIG	DNS signature failed to verify.
0x00002339 DNS_ERROR_RCODE_BADKEY	DNS bad key.
0x0000233A DNS_ERROR_RCODE_BADTIME	DNS signature validity expired.
0x0000251D DNS_INFO_NO_RECORDS	No records found for given DNS query.
0x0000251E DNS_ERROR_BAD_PACKET	Bad DNS packet.
0x0000251F DNS_ERROR_NO_PACKET	No DNS packet.
0x00002520 DNS_ERROR_RCODE	DNS error, check rcode.
0x00002521 DNS_ERROR_UNSECURE_PACKET	Unsecured DNS packet.
0x0000254F DNS_ERROR_INVALID_TYPE	Invalid DNS type.
0x00002550 DNS_ERROR_INVALID_IP_ADDRESS	Invalid IP address.

<b>Win32 error codes</b>	<b>Description</b>
0x00002551 DNS_ERROR_INVALID_PROPERTY	Invalid property.
0x00002552 DNS_ERROR_TRY_AGAIN_LATER	Try DNS operation again later.
0x00002553 DNS_ERROR_NOT_UNIQUE	Record for given name and type is not unique.
0x00002554 DNS_ERROR_NON_RFC_NAME	DNS name does not comply with RFC specifications.
0x00002555 DNS_STATUS_FQDN	DNS name is a fully qualified DNS name.
0x00002556 DNS_STATUS_DOTTED_NAME	DNS name is dotted (multilabel).
0x00002557 DNS_STATUS_SINGLE_PART_NAME	DNS name is a single-part name.
0x00002558 DNS_ERROR_INVALID_NAME_CHAR	DNS name contains an invalid character.
0x00002559 DNS_ERROR_NUMERIC_NAME	DNS name is entirely numeric.
0x0000255A DNS_ERROR_NOT_ALLOWED_ON_ROOT_SERVER	The operation requested is not permitted on a DNS root server.
0x0000255B DNS_ERROR_NOT_ALLOWED_UNDER_DELEGATION	The record could not be created because this part of the DNS namespace has been delegated to another server.
0x0000255C DNS_ERROR_CANNOT_FIND_ROOT_HINTS	The DNS server could not find a set of root hints.
0x0000255D DNS_ERROR_INCONSISTENT_ROOT_HINTS	The DNS server found root hints but they were not consistent across all adapters.
0x0000255E DNS_ERROR_DWORD_VALUE_TOO_SMALL	The specified value is too small for this parameter.
0x0000255F DNS_ERROR_DWORD_VALUE_TOO_LARGE	The specified value is too large for this parameter.
0x00002560 DNS_ERROR_BACKGROUND_LOADING	This operation is not allowed while the DNS server is loading zones in the background. Try again later.
0x00002561 DNS_ERROR_NOT_ALLOWED_ON_RODC	The operation requested is not permitted on against a DNS server running on a read-only DC.
0x00002581	DNS zone does not exist.

<b>Win32 error codes</b>	<b>Description</b>
DNS_ERROR_ZONE_DOES_NOT_EXIST	
0x00002582 DNS_ERROR_NO_ZONE_INFO	DNS zone information not available.
0x00002583 DNS_ERROR_INVALID_ZONE_OPERATION	Invalid operation for DNS zone.
0x00002584 DNS_ERROR_ZONE_CONFIGURATION_ERROR	Invalid DNS zone configuration.
0x00002585 DNS_ERROR_ZONE_HAS_NO_SOA_RECORD	DNS zone has no start of authority (SOA) record.
0x00002586 DNS_ERROR_ZONE_HAS_NO_NS_RECORDS	DNS zone has no Name Server (NS) record.
0x00002587 DNS_ERROR_ZONE_LOCKED	DNS zone is locked.
0x00002588 DNS_ERROR_ZONE_CREATION_FAILED	DNS zone creation failed.
0x00002589 DNS_ERROR_ZONE_ALREADY_EXISTS	DNS zone already exists.
0x0000258A DNS_ERROR_AUTOZONE_ALREADY_EXISTS	DNS automatic zone already exists.
0x0000258B DNS_ERROR_INVALID_ZONE_TYPE	Invalid DNS zone type.
0x0000258C DNS_ERROR_SECONDARY_REQUIRES_MASTER_IP	Secondary DNS zone requires master IP address.
0x0000258D DNS_ERROR_ZONE_NOT_SECONDARY	DNS zone not secondary.
0x0000258E DNS_ERROR_NEED_SECONDARY_ADDRESSES	Need secondary IP address.
0x0000258F DNS_ERROR_WINS_INIT_FAILED	WINS initialization failed.
0x00002590 DNS_ERROR_NEED_WINS_SERVERS	Need WINS servers.
0x00002591 DNS_ERROR_NBSTAT_INIT_FAILED	NBTSTAT initialization call failed.
0x00002592 DNS_ERROR_SOA_DELETE_INVALID	Invalid delete of SOA.
0x00002593 DNS_ERROR_FORWARDER_ALREADY_EXISTS	A conditional forwarding zone already exists for that name.
0x00002594	This zone must be configured with one or more master DNS

<b>Win32 error codes</b>	<b>Description</b>
DNS_ERROR_ZONE_REQUIRES_MASTER_IP	server IP addresses.
0x00002595 DNS_ERROR_ZONE_IS_SHUTDOWN	The operation cannot be performed because this zone is shut down.
0x000025B3 DNS_ERROR_PRIMARY_REQUIRES_DATAFILE	The primary DNS zone requires a data file.
0x000025B4 DNS_ERROR_INVALID_DATAFILE_NAME	Invalid data file name for the DNS zone.
0x000025B5 DNS_ERROR_DATAFILE_OPEN_FAILURE	Failed to open the data file for the DNS zone.
0x000025B6 DNS_ERROR_FILE_WRITEBACK_FAILED	Failed to write the data file for the DNS zone.
0x000025B7 DNS_ERROR_DATAFILE_PARSING	Failure while reading datafile for DNS zone.
0x000025E5 DNS_ERROR_RECORD_DOES_NOT_EXIST	DNS record does not exist.
0x000025E6 DNS_ERROR_RECORD_FORMAT	DNS record format error.
0x000025E7 DNS_ERROR_NODE_CREATION_FAILED	Node creation failure in DNS.
0x000025E8 DNS_ERROR_UNKNOWN_RECORD_TYPE	Unknown DNS record type.
0x000025E9 DNS_ERROR_RECORD_TIMED_OUT	DNS record timed out.
0x000025EA DNS_ERROR_NAME_NOT_IN_ZONE	Name not in DNS zone.
0x000025EB DNS_ERROR_CNAME_LOOP	CNAME loop detected.
0x000025EC DNS_ERROR_NODE_IS_CNAME	Node is a CNAME DNS record.
0x000025ED DNS_ERROR_CNAME_COLLISION	A CNAME record already exists for the given name.
0x000025EE DNS_ERROR_RECORD_ONLY_AT_ZONE_ROOT	Record is only at DNS zone root.
0x000025EF DNS_ERROR_RECORD_ALREADY_EXISTS	DNS record already exists.
0x000025F0 DNS_ERROR_SECONDARY_DATA	Secondary DNS zone data error.
0x000025F1	Could not create DNS cache

<b>Win32 error codes</b>	<b>Description</b>
DNS_ERROR_NO_CREATE_CACHE_DATA	data.
0x000025F2 DNS_ERROR_NAME_DOES_NOT_EXIST	DNS name does not exist.
0x000025F3 DNS_WARNING_PTR_CREATE_FAILED	Could not create pointer (PTR) record.
0x000025F4 DNS_WARNING_DOMAIN_UNDELETED	DNS domain was undeleted.
0x000025F5 DNS_ERROR_DS_UNAVAILABLE	The directory service is unavailable.
0x000025F6 DNS_ERROR_DS_ZONE_ALREADY_EXISTS	DNS zone already exists in the directory service.
0x000025F7 DNS_ERROR_NO_BOOTFILE_IF_DS_ZONE	DNS server not creating or reading the boot file for the directory service integrated DNS zone.
0x00002617 DNS_INFO_AXFR_COMPLETE	DNS AXFR (zone transfer) complete.
0x00002618 DNS_ERROR_AXFR	DNS zone transfer failed.
0x00002619 DNS_INFO_ADDED_LOCAL_WINS	Added local WINS server.
0x00002649 DNS_STATUS_CONTINUE_NEEDED	Secure update call needs to continue update request.
0x0000267B DNS_ERROR_NO_TCPIP	TCP/IP network protocol not installed.
0x0000267C DNS_ERROR_NO_DNS_SERVERS	No DNS servers configured for local system.
0x000026AD DNS_ERROR_DP_DOES_NOT_EXIST	The specified directory partition does not exist.
0x000026AE DNS_ERROR_DP_ALREADY_EXISTS	The specified directory partition already exists.
0x000026AF DNS_ERROR_DP_NOT_ENLISTED	This DNS server is not enlisted in the specified directory partition.
0x000026B0 DNS_ERROR_DP_ALREADY_ENLISTED	This DNS server is already enlisted in the specified directory partition.
0x000026B1 DNS_ERROR_DP_NOT_AVAILABLE	The directory partition is not available at this time. Wait a few minutes and try again.
0x000026B2	The application directory partition operation failed. The

<b>Win32 error codes</b>	<b>Description</b>
DNS_ERROR_DP_FSMO_ERROR	domain controller holding the domain naming master role is down or unable to service the request or is not running Windows Server 2003.
0x00002714 WSAEINTR	A blocking operation was interrupted by a call to WSACancelBlockingCall.
0x00002719 WSAEBADF	The file handle supplied is not valid.
0x0000271D WSAEACCES	An attempt was made to access a socket in a way forbidden by its access permissions.
0x0000271E WSAEFAULT	The system detected an invalid pointer address in attempting to use a pointer argument in a call.
0x00002726 WSAEINVAL	An invalid argument was supplied.
0x00002728 WSAEMFILE	Too many open sockets.
0x00002733 WSAEWOULDBLOCK	A nonblocking socket operation could not be completed immediately.
0x00002734 WSAEINPROGRESS	A blocking operation is currently executing.
0x00002735 WSAEALREADY	An operation was attempted on a nonblocking socket that already had an operation in progress.
0x00002736 WSAENOTSOCK	An operation was attempted on something that is not a socket.
0x00002737 WSAEDESTADDRREQ	A required address was omitted from an operation on a socket.
0x00002738 WSAEMSGSIZE	A message sent on a datagram socket was larger than the internal message buffer or some other network limit, or the buffer used to receive a datagram into was smaller than the datagram itself.
0x00002739 WSAEPROTOTYPE	A protocol was specified in the socket function call that does not support the semantics of the socket type requested.
0x0000273A WSAENOPROTOOPT	An unknown, invalid, or unsupported option or level was specified in a getsockopt or setsockopt call.

<b>Win32 error codes</b>	<b>Description</b>
0x0000273B WSAEPROTONOSUPPORT	The requested protocol has not been configured into the system, or no implementation for it exists.
0x0000273C WSAESOCKTNOSUPPORT	The support for the specified socket type does not exist in this address family.
0x0000273D WSAEOPNOTSUPP	The attempted operation is not supported for the type of object referenced.
0x0000273E WSAEPFNOSUPPORT	The protocol family has not been configured into the system or no implementation for it exists.
0x0000273F WSAEAFNOSUPPORT	An address incompatible with the requested protocol was used.
0x00002740 WSAEADDRINUSE	Only one usage of each socket address (protocol/network address/port) is normally permitted.
0x00002741 WSAEADDRNOTAVAIL	The requested address is not valid in its context.
0x00002742 WSAENETDOWN	A socket operation encountered a dead network.
0x00002743 WSAENETUNREACH	A socket operation was attempted to an unreachable network.
0x00002744 WSAENETRESET	The connection has been broken due to keep-alive activity detecting a failure while the operation was in progress.
0x00002745 WSAECONNABORTED	An established connection was aborted by the software in your host machine.
0x00002746 WSAECONNRESET	An existing connection was forcibly closed by the remote host.
0x00002747 WSAENOBUFS	An operation on a socket could not be performed because the system lacked sufficient buffer space or because a queue was full.
0x00002748 WSAEISCONN	A connect request was made on an already connected socket.
0x00002749 WSAENOTCONN	A request to send or receive data was disallowed because the socket is not connected and (when sending on a datagram socket using a sendto call) no

Win32 error codes	Description
	address was supplied.
0x0000274A WSAESHUTDOWN	A request to send or receive data was disallowed because the socket had already been shut down in that direction with a previous shutdown call.
0x0000274B WSAETOOMANYREFS	Too many references to a kernel object.
0x0000274C WSAETIMEDOUT	A connection attempt failed because the connected party did not properly respond after a period of time, or the established connection failed because the connected host failed to respond.
0x0000274D WSAECONNREFUSED	No connection could be made because the target machine actively refused it.
0x0000274E WSAELOOP	Cannot translate name.
0x0000274F WSAENAMETOOLONG	Name or name component was too long.
0x00002750 WSAEHOSTDOWN	A socket operation failed because the destination host was down.
0x00002751 WSAEHOSTUNREACH	A socket operation was attempted to an unreachable host.
0x00002752 WSAENOTEMPTY	Cannot remove a directory that is not empty.
0x00002753 WSAEPROCLIM	A Windows Sockets implementation <b>may</b> have a limit on the number of applications that <b>may</b> use it simultaneously.
0x00002754 WSAEUSERS	Ran out of quota.
0x00002755 WSAEDQUOT	Ran out of disk quota.
0x00002756 WSAESTALE	File handle reference is no longer available.
0x00002757 WSAEREMOTE	Item is not available locally.
0x0000276B WSASYSNOTREADY	WSAStartup cannot function at this time because the underlying system it uses to provide network services is currently

Win32 error codes	Description
	unavailable.
0x0000276C WSAVERNOTSUPPORTED	The Windows Sockets version requested is not supported.
0x0000276D WSANOTINITIALISED	Either the application has not called WSASocket, or WSASocket failed.
0x00002775 WSAEDISCON	Returned by WSASocket or WSASocketFrom to indicate that the remote party has initiated a graceful shutdown sequence.
0x00002776 WSAENOMORE	No more results can be returned by WSALookupServiceNext.
0x00002777 WSAECANCELLED	A call to WSALookupServiceEnd was made while this call was still processing. The call has been canceled.
0x00002778 WSAEINVALIDPROCTABLE	The procedure call table is invalid.
0x00002779 WSAEINVALIDPROVIDER	The requested service provider is invalid.
0x0000277A WSAEPROVIDERFAILEDINIT	The requested service provider could not be loaded or initialized.
0x0000277B WSASYSSCALLFAILURE	A system call that should never fail has failed.
0x0000277C WSASERVICE_NOT_FOUND	No such service is known. The service cannot be found in the specified namespace.
0x0000277D WSATYPE_NOT_FOUND	The specified class was not found.
0x0000277E WSA_E_NO_MORE	No more results can be returned by WSALookupServiceNext.
0x0000277F WSA_E_CANCELLED	A call to WSALookupServiceEnd was made while this call was still processing. The call has been canceled.
0x00002780 WSAEREFUSED	A database query failed because it was actively refused.
0x00002AF9 WSAHOST_NOT_FOUND	No such host is known.
0x00002AFA WSATRY_AGAIN	This is usually a temporary error during host name resolution and means that the local server did not receive a response from an authoritative server.

<b>Win32 error codes</b>	<b>Description</b>
0x00002AFB WSANO_RECOVERY	A nonrecoverable error occurred during a database lookup.
0x00002AFC WSANO_DATA	The requested name is valid, but no data of the requested type was found.
0x00002AFD WSA_QOS_RECEIVERS	At least one reserve has arrived.
0x00002AFE WSA_QOS_SENDERS	At least one path has arrived.
0x00002AFF WSA_QOS_NO_SENDERS	There are no senders.
0x00002B00 WSA_QOS_NO_RECEIVERS	There are no receivers.
0x00002B01 WSA_QOS_REQUEST_CONFIRMED	Reserve has been confirmed.
0x00002B02 WSA_QOS_ADMISSION_FAILURE	Error due to lack of resources.
0x00002B03 WSA_QOS_POLICY_FAILURE	Rejected for administrative reasons—bad credentials.
0x00002B04 WSA_QOS_BAD_STYLE	Unknown or conflicting style.
0x00002B05 WSA_QOS_BAD_OBJECT	There is a problem with some part of the filterspec or provider-specific buffer in general.
0x00002B06 WSA_QOS_TRAFFIC_CTRL_ERROR	There is a problem with some part of the flowspec.
0x00002B07 WSA_QOS_GENERIC_ERROR	General quality of serve (QOS) error.
0x00002B08 WSA_QOS_ESERVICETYPE	An invalid or unrecognized service type was found in the flowspec.
0x00002B09 WSA_QOS_EFLOWSPEC	An invalid or inconsistent flowspec was found in the QOS structure.
0x00002B0A WSA_QOS_EPROVSPECBUF	Invalid QOS provider-specific buffer.
0x00002B0B WSA_QOS_EFILTERSTYLE	An invalid QOS filter style was used.
0x00002B0C WSA_QOS_EFILTERTYPE	An invalid QOS filter type was used.

Win32 error codes	Description
0x00002B0D WSA_QOS_EFILTERCOUNT	An incorrect number of QOS FILTERSPECS were specified in the FLOWDESCRIPTOR.
0x00002B0E WSA_QOS_EOBJLENGTH	An object with an invalid <b>ObjectLength</b> field was specified in the QOS provider-specific buffer.
0x00002B0F WSA_QOS_EFLOWCOUNT	An incorrect number of flow descriptors was specified in the QOS structure.
0x00002B10 WSA_QOS_EUNKOWNPSOBJ	An unrecognized object was found in the QOS provider-specific buffer.
0x00002B11 WSA_QOS_EPOLICYOBJ	An invalid policy object was found in the QOS provider-specific buffer.
0x00002B12 WSA_QOS_EFLOWDESC	An invalid QOS flow descriptor was found in the flow descriptor list.
0x00002B13 WSA_QOS_EPSFLOWSPEC	An invalid or inconsistent flowspec was found in the QOS provider-specific buffer.
0x00002B14 WSA_QOS_EPSFILTERSPEC	An invalid FILTERSPEC was found in the QOS provider-specific buffer.
0x00002B15 WSA_QOS_ESDMODEOBJ	An invalid shape discard mode object was found in the QOS provider-specific buffer.
0x00002B16 WSA_QOS_ESHAPERATEOBJ	An invalid shaping rate object was found in the QOS provider-specific buffer.
0x00002B17 WSA_QOS_RESERVED_PETYPE	A reserved policy element was found in the QOS provider-specific buffer.
0x000032C8 ERROR_IPSEC_QM_POLICY_EXISTS	The specified quick mode policy already exists.
0x000032C9 ERROR_IPSEC_QM_POLICY_NOT_FOUND	The specified quick mode policy was not found.
0x000032CA ERROR_IPSEC_QM_POLICY_IN_USE	The specified quick mode policy is being used.
0x000032CB ERROR_IPSEC_MM_POLICY_EXISTS	The specified main mode policy already exists.
0x000032CC ERROR_IPSEC_MM_POLICY_NOT_FOUND	The specified main mode policy was not found.
0x000032CD	The specified main mode policy

<b>Win32 error codes</b>	<b>Description</b>
ERROR_IPSEC_MM_POLICY_IN_USE	is being used.
0x000032CE ERROR_IPSEC_MM_FILTER_EXISTS	The specified main mode filter already exists.
0x000032CF ERROR_IPSEC_MM_FILTER_NOT_FOUND	The specified main mode filter was not found.
0x000032D0 ERROR_IPSEC_TRANSPORT_FILTER_EXISTS	The specified transport mode filter already exists.
0x000032D1 ERROR_IPSEC_TRANSPORT_FILTER_NOT_FOUND	The specified transport mode filter does not exist.
0x000032D2 ERROR_IPSEC_MM_AUTH_EXISTS	The specified main mode authentication list exists.
0x000032D3 ERROR_IPSEC_MM_AUTH_NOT_FOUND	The specified main mode authentication list was not found.
0x000032D4 ERROR_IPSEC_MM_AUTH_IN_USE	The specified main mode authentication list is being used.
0x000032D5 ERROR_IPSEC_DEFAULT_MM_POLICY_NOT_FOUND	The specified default main mode policy was not found.
0x000032D6 ERROR_IPSEC_DEFAULT_MM_AUTH_NOT_FOUND	The specified default main mode authentication list was not found.
0x000032D7 ERROR_IPSEC_DEFAULT_QM_POLICY_NOT_FOUND	The specified default quick mode policy was not found.
0x000032D8 ERROR_IPSEC_TUNNEL_FILTER_EXISTS	The specified tunnel mode filter exists.
0x000032D9 ERROR_IPSEC_TUNNEL_FILTER_NOT_FOUND	The specified tunnel mode filter was not found.
0x000032DA ERROR_IPSEC_MM_FILTER_PENDING_DELETION	The main mode filter is pending deletion.
0x000032DB ERROR_IPSEC_TRANSPORT_FILTER_PENDING_DELETION	The transport filter is pending deletion.
0x000032DC ERROR_IPSEC_TUNNEL_FILTER_PENDING_DELETION	The tunnel filter is pending deletion.
0x000032DD ERROR_IPSEC_MM_POLICY_PENDING_DELETION	The main mode policy is pending deletion.
0x000032DE ERROR_IPSEC_MM_AUTH_PENDING_DELETION	The main mode authentication bundle is pending deletion.
0x000032DF ERROR_IPSEC_QM_POLICY_PENDING_DELETION	The quick mode policy is pending deletion.

<b>Win32 error codes</b>	<b>Description</b>
0x000032E0 WARNING_IPSEC_MM_POLICY_PRUNED	The main mode policy was successfully added, but some of the requested offers are not supported.
0x000032E1 WARNING_IPSEC_QM_POLICY_PRUNED	The quick mode policy was successfully added, but some of the requested offers are not supported.
0x000035E8 ERROR_IPSEC_IKE_NEG_STATUS_BEGIN	Starts the list of frequencies of various IKE Win32 error codes encountered during negotiations.
0x000035E9 ERROR_IPSEC_IKE_AUTH_FAIL	The IKE authentication credentials are unacceptable.
0x000035EA ERROR_IPSEC_IKE_ATTRIB_FAIL	The IKE security attributes are unacceptable.
0x000035EB ERROR_IPSEC_IKE_NEGOTIATION_PENDING	The IKE negotiation is in progress.
0x000035EC ERROR_IPSEC_IKE_GENERAL_PROCESSING_ERROR	General processing error.
0x000035ED ERROR_IPSEC_IKE_TIMED_OUT	Negotiation timed out.
0x000035EE ERROR_IPSEC_IKE_NO_CERT	The IKE failed to find a valid machine certificate. Contact your network security administrator about installing a valid certificate in the appropriate certificate store.
0x000035EF ERROR_IPSEC_IKE_SA_DELETED	The IKE security association (SA) was deleted by a peer before it was completely established.
0x000035F0 ERROR_IPSEC_IKE_SA_REAPED	The IKE SA was deleted before it was completely established.
0x000035F1 ERROR_IPSEC_IKE_MM_ACQUIRE_DROP	The negotiation request sat in the queue too long.
0x000035F2 ERROR_IPSEC_IKE_QM_ACQUIRE_DROP	The negotiation request sat in the queue too long.
0x000035F3 ERROR_IPSEC_IKE_QUEUE_DROP_MM	The negotiation request sat in the queue too long.
0x000035F4 ERROR_IPSEC_IKE_QUEUE_DROP_NO_MM	The negotiation request sat in the queue too long.
0x000035F5 ERROR_IPSEC_IKE_DROP_NO_RESPONSE	There was no response from a peer.
0x000035F6	The negotiation took too long.

<b>Win32 error codes</b>	<b>Description</b>
ERROR_IPSEC_IKE_MM_DELAY_DROP	
0x000035F7 ERROR_IPSEC_IKE_QM_DELAY_DROP	The negotiation took too long.
0x000035F8 ERROR_IPSEC_IKE_ERROR	An unknown error occurred.
0x000035F9 ERROR_IPSEC_IKE_CRL_FAILED	The certificate revocation check failed.
0x000035FA ERROR_IPSEC_IKE_INVALID_KEY_USAGE	Invalid certificate key usage.
0x000035FB ERROR_IPSEC_IKE_INVALID_CERT_TYPE	Invalid certificate type.
0x000035FC ERROR_IPSEC_IKE_NO_PRIVATE_KEY	The IKE negotiation failed because the machine certificate used does not have a private key. IPsec certificates require a private key. Contact your network security administrator about a certificate that has a private key.
0x000035FE ERROR_IPSEC_IKE_DH_FAIL	There was a failure in the Diffie-Hellman computation.
0x00003600 ERROR_IPSEC_IKE_INVALID_HEADER	Invalid header.
0x00003601 ERROR_IPSEC_IKE_NO_POLICY	No policy configured.
0x00003602 ERROR_IPSEC_IKE_INVALID_SIGNATURE	Failed to verify signature.
0x00003603 ERROR_IPSEC_IKE_KERBEROS_ERROR	Failed to authenticate using Kerberos.
0x00003604 ERROR_IPSEC_IKE_NO_PUBLIC_KEY	The peer's certificate did not have a public key.
0x00003605 ERROR_IPSEC_IKE_PROCESS_ERR	Error processing the error payload.
0x00003606 ERROR_IPSEC_IKE_PROCESS_ERR_SA	Error processing the SA payload.
0x00003607 ERROR_IPSEC_IKE_PROCESS_ERR_PROP	Error processing the proposal payload.
0x00003608 ERROR_IPSEC_IKE_PROCESS_ERR_TRANS	Error processing the transform payload.
0x00003609 ERROR_IPSEC_IKE_PROCESS_ERR_KEY	Error processing the key exchange payload.

<b>Win32 error codes</b>	<b>Description</b>
0x0000360A ERROR_IPSEC_IKE_PROCESS_ERR_ID	Error processing the ID payload.
0x0000360B ERROR_IPSEC_IKE_PROCESS_ERR_CERT	Error processing the certification payload.
0x0000360C ERROR_IPSEC_IKE_PROCESS_ERR_CERT_REQ	Error processing the certificate request payload.
0x0000360D ERROR_IPSEC_IKE_PROCESS_ERR_HASH	Error processing the hash payload.
0x0000360E ERROR_IPSEC_IKE_PROCESS_ERR_SIG	Error processing the signature payload.
0x0000360F ERROR_IPSEC_IKE_PROCESS_ERR_NONCE	Error processing the nonce payload.
0x00003610 ERROR_IPSEC_IKE_PROCESS_ERR_NOTIFY	Error processing the notify payload.
0x00003611 ERROR_IPSEC_IKE_PROCESS_ERR_DELETE	Error processing the delete payload.
0x00003612 ERROR_IPSEC_IKE_PROCESS_ERR_VENDOR	Error processing the VendorId payload.
0x00003613 ERROR_IPSEC_IKE_INVALID_PAYLOAD	Invalid payload received.
0x00003614 ERROR_IPSEC_IKE_LOAD_SOFT_SA	Soft SA loaded.
0x00003615 ERROR_IPSEC_IKE_SOFT_SA_TORN_DOWN	Soft SA torn down.
0x00003616 ERROR_IPSEC_IKE_INVALID_COOKIE	Invalid cookie received.
0x00003617 ERROR_IPSEC_IKE_NO_PEER_CERT	Peer failed to send valid machine certificate.
0x00003618 ERROR_IPSEC_IKE_PEER_CRL_FAILED	Certification revocation check of peer's certificate failed.
0x00003619 ERROR_IPSEC_IKE_POLICY_CHANGE	New policy invalidated SAs formed with the old policy.
0x0000361A ERROR_IPSEC_IKE_NO_MM_POLICY	There is no available main mode IKE policy.
0x0000361B ERROR_IPSEC_IKE_NOTCBPRIV	Failed to enable trusted computer base (TCB) privilege.
0x0000361C ERROR_IPSEC_IKE_SECLOADFAIL	Failed to load SECURITY.DLL.

<b>Win32 error codes</b>	<b>Description</b>
0x0000361D ERROR_IPSEC_IKE_FAILSSPINIT	Failed to obtain the security function table dispatch address from the SSPI.
0x0000361E ERROR_IPSEC_IKE_FAILQUERYSSP	Failed to query the Kerberos package to obtain the max token size.
0x0000361F ERROR_IPSEC_IKE_SRVACQFAIL	Failed to obtain the Kerberos server credentials for the Internet Security Association and Key Management Protocol (ISAKMP)/ERROR_IPSEC_IKE service. Kerberos authentication will not function. The most likely reason for this is lack of domain membership. This is normal if your computer is a member of a workgroup.
0x00003620 ERROR_IPSEC_IKE_SRVQUERYCRED	Failed to determine the SSPI principal name for ISAKMP/ERROR_IPSEC_IKE service (QueryCredentialsAttributes).
0x00003621 ERROR_IPSEC_IKE_GETSPIFAIL	Failed to obtain a new service provider interface (SPI) for the inbound SA from the IPsec driver. The most common cause for this is that the driver does not have the correct filter. Check your policy to verify the filters.
0x00003622 ERROR_IPSEC_IKE_INVALID_FILTER	Given filter is invalid.
0x00003623 ERROR_IPSEC_IKE_OUT_OF_MEMORY	Memory allocation failed.
0x00003624 ERROR_IPSEC_IKE_ADD_UPDATE_KEY_FAILED	Failed to add an SA to the IPsec driver. The most common cause for this is if the IKE negotiation took too long to complete. If the problem persists, reduce the load on the faulting machine.
0x00003625 ERROR_IPSEC_IKE_INVALID_POLICY	Invalid policy.
0x00003626 ERROR_IPSEC_IKE_UNKNOWN_DOI	Invalid digital object identifier (DOI).
0x00003627 ERROR_IPSEC_IKE_INVALID_SITUATION	Invalid situation.
0x00003628 ERROR_IPSEC_IKE_DH_FAILURE	Diffie-Hellman failure.
0x00003629	Invalid Diffie-Hellman group.

<b>Win32 error codes</b>	<b>Description</b>
ERROR_IPSEC_IKE_INVALID_GROUP	
0x0000362A ERROR_IPSEC_IKE_ENCRYPT	Error encrypting payload.
0x0000362B ERROR_IPSEC_IKE_DECRYPT	Error decrypting payload.
0x0000362C ERROR_IPSEC_IKE_POLICY_MATCH	Policy match error.
0x0000362D ERROR_IPSEC_IKE_UNSUPPORTED_ID	Unsupported ID.
0x0000362E ERROR_IPSEC_IKE_INVALID_HASH	Hash verification failed.
0x0000362F ERROR_IPSEC_IKE_INVALID_HASH_ALG	Invalid hash algorithm.
0x00003630 ERROR_IPSEC_IKE_INVALID_HASH_SIZE	Invalid hash size.
0x00003631 ERROR_IPSEC_IKE_INVALID_ENCRYPT_ALG	Invalid encryption algorithm.
0x00003632 ERROR_IPSEC_IKE_INVALID_AUTH_ALG	Invalid authentication algorithm.
0x00003633 ERROR_IPSEC_IKE_INVALID_SIG	Invalid certificate signature.
0x00003634 ERROR_IPSEC_IKE_LOAD_FAILED	Load failed.
0x00003635 ERROR_IPSEC_IKE_RPC_DELETE	Deleted by using an RPC call.
0x00003636 ERROR_IPSEC_IKE_BENIGN_REINIT	A temporary state was created to perform reinitialization. This is not a real failure.
0x00003637 ERROR_IPSEC_IKE_INVALID_RESPONDER_LIFETIME_NOTIFY	The lifetime value received in the Responder Lifetime Notify is below the Windows 2000 configured minimum value. Fix the policy on the peer machine.
0x00003639 ERROR_IPSEC_IKE_INVALID_CERT_KEYLEN	Key length in the certificate is too small for configured security requirements.
0x0000363A ERROR_IPSEC_IKE_MM_LIMIT	Maximum number of established MM SAs to peer exceeded.
0x0000363B ERROR_IPSEC_IKE_NEGOTIATION_DISABLED	The IKE received a policy that disables negotiation.
0x0000363C	Reached maximum quick mode

<b>Win32 error codes</b>	<b>Description</b>
ERROR_IPSEC_IKE_QM_LIMIT	limit for the main mode. New main mode will be started.
0x0000363D ERROR_IPSEC_IKE_MM_EXPIRED	Main mode SA lifetime expired or the peer sent a main mode delete.
0x0000363E ERROR_IPSEC_IKE_PEER_MM_ASSUMED_INVALID	Main mode SA assumed to be invalid because peer stopped responding.
0x0000363F ERROR_IPSEC_IKE_CERT_CHAIN_POLICY_MISMATCH	Certificate does not chain to a trusted root in IPsec policy.
0x00003640 ERROR_IPSEC_IKE_UNEXPECTED_MESSAGE_ID	Received unexpected message ID.
0x00003641 ERROR_IPSEC_IKE_INVALID_UMATTS	Received invalid AuthIP user mode attributes.
0x00003642 ERROR_IPSEC_IKE_DOS_COOKIE_SENT	Sent DOS cookie notify to initiator.
0x00003643 ERROR_IPSEC_IKE_SHUTTING_DOWN	The IKE service is shutting down.
0x00003644 ERROR_IPSEC_IKE_CGA_AUTH_FAILED	Could not verify the binding between the color graphics adapter (CGA) address and the certificate.
0x00003645 ERROR_IPSEC_IKE_PROCESS_ERR_NATOA	Error processing the NatOA payload.
0x00003646 ERROR_IPSEC_IKE_INVALID_MM_FOR_QM	The parameters of the main mode are invalid for this quick mode.
0x00003647 ERROR_IPSEC_IKE_QM_EXPIRED	The quick mode SA was expired by the IPsec driver.
0x00003648 ERROR_IPSEC_IKE_TOO_MANY_FILTERS	Too many dynamically added IKEEXT filters were detected.
0x00003649 ERROR_IPSEC_IKE_NEG_STATUS_END	Ends the list of frequencies of various IKE Win32 error codes encountered during negotiations.
0x000036B0 ERROR_SXS_SECTION_NOT_FOUND	The requested section was not present in the activation context.
0x000036B1 ERROR_SXS_CANT_GEN_ACTCTX	The application has failed to start because its side-by-side configuration is incorrect. See the application event log for more detail.
0x000036B2 ERROR_SXS_INVALID_ACTCTXDATA_FORMAT	The application binding data format is invalid.

<b>Win32 error codes</b>	<b>Description</b>
0x000036B3 ERROR_SXS_ASSEMBLY_NOT_FOUND	The referenced assembly is not installed on your system.
0x000036B4 ERROR_SXS_MANIFEST_FORMAT_ERROR	The manifest file does not begin with the required tag and format information.
0x000036B5 ERROR_SXS_MANIFEST_PARSE_ERROR	The manifest file contains one or more syntax errors.
0x000036B6 ERROR_SXS_ACTIVATION_CONTEXT_DISABLED	The application attempted to activate a disabled activation context.
0x000036B7 ERROR_SXS_KEY_NOT_FOUND	The requested lookup key was not found in any active activation context.
0x000036B8 ERROR_SXS_VERSION_CONFLICT	A component version required by the application conflicts with another active component version.
0x000036B9 ERROR_SXS_WRONG_SECTION_TYPE	The type requested activation context section does not match the query API used.
0x000036BA ERROR_SXS_THREAD_QUERIES_DISABLED	Lack of system resources has required isolated activation to be disabled for the current thread of execution.
0x000036BB ERROR_SXS_PROCESS_DEFAULT_ALREADY_SET	An attempt to set the process default activation context failed because the process default activation context was already set.
0x000036BC ERROR_SXS_UNKNOWN_ENCODING_GROUP	The encoding group identifier specified is not recognized.
0x000036BD ERROR_SXS_UNKNOWN_ENCODING	The encoding requested is not recognized.
0x000036BE ERROR_SXS_INVALID_XML_NAMESPACE_URI	The manifest contains a reference to an invalid URI.
0x000036BF ERROR_SXS_ROOT_MANIFEST_DEPENDENCY_NOT_INSTALLED	The application manifest contains a reference to a dependent assembly that is not installed.
0x000036C0 ERROR_SXS_LEAF_MANIFEST_DEPENDENCY_NOT_INSTALLED	The manifest for an assembly used by the application has a reference to a dependent assembly that is not installed.
0x000036C1 ERROR_SXS_INVALID_ASSEMBLY_IDENTITY_ATTRIBUTE	The manifest contains an attribute for the assembly identity that is not valid.

<b>Win32 error codes</b>	<b>Description</b>
0x000036C2 ERROR_SXS_MANIFEST_MISSING_REQUIRED_DEFAULT_NAMESPACE	The manifest is missing the required default namespace specification on the assembly element.
0x000036C3 ERROR_SXS_MANIFEST_INVALID_REQUIRED_DEFAULT_NAMESPACE	The manifest has a default namespace specified on the assembly element but its value is not urn:schemas-microsoft-com:asm.v1".
0x000036C4 ERROR_SXS_PRIVATE_MANIFEST_CROSS_PATH_WITH_REPARSE_POINT	The private manifest probed has crossed the reparse-point-associated path.
0x000036C5 ERROR_SXS_DUPLICATE_DLL_NAME	Two or more components referenced directly or indirectly by the application manifest have files by the same name.
0x000036C6 ERROR_SXS_DUPLICATE_WINDOWCLASS_NAME	Two or more components referenced directly or indirectly by the application manifest have window classes with the same name.
0x000036C7 ERROR_SXS_DUPLICATE_CLSID	Two or more components referenced directly or indirectly by the application manifest have the same COM server CLSIDs.
0x000036C8 ERROR_SXS_DUPLICATE_IID	Two or more components referenced directly or indirectly by the application manifest have proxies for the same COM interface IIDs.
0x000036C9 ERROR_SXS_DUPLICATE_TLBID	Two or more components referenced directly or indirectly by the application manifest have the same COM type library TLBIDs.
0x000036CA ERROR_SXS_DUPLICATE_PROGID	Two or more components referenced directly or indirectly by the application manifest have the same COM ProgIDs.
0x000036CB ERROR_SXS_DUPLICATE_ASSEMBLY_NAME	Two or more components referenced directly or indirectly by the application manifest are different versions of the same component, which is not permitted.
0x000036CC ERROR_SXS_FILE_HASH_MISMATCH	A component's file does not match the verification information present in the component manifest.
0x000036CD ERROR_SXS_POLICY_PARSE_ERROR	The policy manifest contains one or more syntax errors.

<b>Win32 error codes</b>	<b>Description</b>
0x000036CE ERROR_SXS_XML_E_MISSINGQUOTE	Manifest Parse Error: A string literal was expected, but no opening quotation mark was found.
0x000036CF ERROR_SXS_XML_E_COMMENTSYNTAX	Manifest Parse Error: Incorrect syntax was used in a comment.
0x000036D0 ERROR_SXS_XML_E_BADSTARTNAMECHAR	Manifest Parse Error: A name started with an invalid character.
0x000036D1 ERROR_SXS_XML_E_BADNAMECHAR	Manifest Parse Error: A name contained an invalid character.
0x000036D2 ERROR_SXS_XML_E_BADCHARINSTRING	Manifest Parse Error: A string literal contained an invalid character.
0x000036D3 ERROR_SXS_XML_E_XMLDECLSYNTAX	Manifest Parse Error: Invalid syntax for an XML declaration.
0x000036D4 ERROR_SXS_XML_E_BADCHARDATA	Manifest Parse Error: An Invalid character was found in text content.
0x000036D5 ERROR_SXS_XML_E_MISSINGWHITESPACE	Manifest Parse Error: Required white space was missing.
0x000036D6 ERROR_SXS_XML_E_EXPECTINGTAGEND	Manifest Parse Error: The angle bracket (>) character was expected.
0x000036D7 ERROR_SXS_XML_E_MISSINGSEMICOLON	Manifest Parse Error: A semicolon (;) was expected.
0x000036D8 ERROR_SXS_XML_E_UNBALANCEDPAREN	Manifest Parse Error: Unbalanced parentheses.
0x000036D9 ERROR_SXS_XML_E_INTERNALERROR	Manifest Parse Error: Internal error.
0x000036DA ERROR_SXS_XML_E_UNEXPECTED_WHITESPACE	Manifest Parse Error: Whitespace is not allowed at this location.
0x000036DB ERROR_SXS_XML_E_INCOMPLETE_ENCODING	Manifest Parse Error: End of file reached in invalid state for current encoding.
0x000036DC ERROR_SXS_XML_E_MISSING_PAREN	Manifest Parse Error: Missing parenthesis.
0x000036DD ERROR_SXS_XML_E_EXPECTINGCLOSEQUOTE	Manifest Parse Error: A single (') or double (") quotation mark is missing.
0x000036DE ERROR_SXS_XML_E_MULTIPLE_COLONS	Manifest Parse Error: Multiple colons are not allowed in a name.
0x000036DF	Manifest Parse Error: Invalid

<b>Win32 error codes</b>	<b>Description</b>
ERROR_SXS_XML_E_INVALID_DECIMAL	character for decimal digit.
0x000036E0 ERROR_SXS_XML_E_INVALID_HEXIDECIMAL	Manifest Parse Error: Invalid character for hexadecimal digit.
0x000036E1 ERROR_SXS_XML_E_INVALID_UNICODE	Manifest Parse Error: Invalid Unicode character value for this platform.
0x000036E2 ERROR_SXS_XML_E_WHITESPACEORQUESTIONMARK	Manifest Parse Error: Expecting whitespace or question mark (?).
0x000036E3 ERROR_SXS_XML_E_UNEXPECTEDENDTAG	Manifest Parse Error: End tag was not expected at this location.
0x000036E4 ERROR_SXS_XML_E_UNCLOSEDTAG	Manifest Parse Error: The following tags were not closed: %1.
0x000036E5 ERROR_SXS_XML_E_DUPLICATEATTRIBUTE	Manifest Parse Error: Duplicate attribute.
0x000036E6 ERROR_SXS_XML_E_MULTIPLEROOTS	Manifest Parse Error: Only one top-level element is allowed in an XML document.
0x000036E7 ERROR_SXS_XML_E_INVALIDATROOTLEVEL	Manifest Parse Error: Invalid at the top level of the document.
0x000036E8 ERROR_SXS_XML_E_BADXMLDECL	Manifest Parse Error: Invalid XML declaration.
0x000036E9 ERROR_SXS_XML_E_MISSINGROOT	Manifest Parse Error: XML document must have a top-level element.
0x000036EA ERROR_SXS_XML_E_UNEXPECTEDEOF	Manifest Parse Error: Unexpected end of file.
0x000036EB ERROR_SXS_XML_E_BADPEREFINSUBSET	Manifest Parse Error: Parameter entities cannot be used inside markup declarations in an internal subset.
0x000036EC ERROR_SXS_XML_E_UNCLOSEDSTARTTAG	Manifest Parse Error: Element was not closed.
0x000036ED ERROR_SXS_XML_E_UNCLOSEDENDTAG	Manifest Parse Error: End element was missing the angle bracket (>) character.
0x000036EE ERROR_SXS_XML_E_UNCLOSEDSTRING	Manifest Parse Error: A string literal was not closed.
0x000036EF ERROR_SXS_XML_E_UNCLOSEDCOMMENT	Manifest Parse Error: A comment was not closed.
0x000036F0 ERROR_SXS_XML_E_UNCLOSEDDECL	Manifest Parse Error: A declaration was not closed.

<b>Win32 error codes</b>	<b>Description</b>
0x000036F1 ERROR_SXS_XML_E_UNCLOSEDCDATA	Manifest Parse Error: A CDATA section was not closed.
0x000036F2 ERROR_SXS_XML_E_RESERVEDNAMESPACE	Manifest Parse Error: The namespace prefix is not allowed to start with the reserved string "xml".
0x000036F3 ERROR_SXS_XML_E_INVALIDENCODING	Manifest Parse Error: System does not support the specified encoding.
0x000036F4 ERROR_SXS_XML_E_INVALIDSWITCH	Manifest Parse Error: Switch from current encoding to specified encoding not supported.
0x000036F5 ERROR_SXS_XML_E_BADXMLCASE	Manifest Parse Error: The name "xml" is reserved and must be lowercase.
0x000036F6 ERROR_SXS_XML_E_INVALID_STANDALONE	Manifest Parse Error: The stand-alone attribute must have the value "yes" or "no".
0x000036F7 ERROR_SXS_XML_E_UNEXPECTED_STANDALONE	Manifest Parse Error: The stand-alone attribute cannot be used in external entities.
0x000036F8 ERROR_SXS_XML_E_INVALID_VERSION	Manifest Parse Error: Invalid version number.
0x000036F9 ERROR_SXS_XML_E_MISSINGEQUALS	Manifest Parse Error: Missing equal sign (=) between the attribute and the attribute value.
0x000036FA ERROR_SXS_PROTECTION_RECOVERY_FAILED	Assembly Protection Error: Unable to recover the specified assembly.
0x000036FB ERROR_SXS_PROTECTION_PUBLIC_KEY_OO_SHORT	Assembly Protection Error: The public key for an assembly was too short to be allowed.
0x000036FC ERROR_SXS_PROTECTION_CATALOG_NOT_VALID	Assembly Protection Error: The catalog for an assembly is not valid, or does not match the assembly's manifest.
0x000036FD ERROR_SXS_UNTRANSLATABLE_HRESULT	An HRESULT could not be translated to a corresponding Win32 error code.
0x000036FE ERROR_SXS_PROTECTION_CATALOG_FILE_MISSING	Assembly Protection Error: The catalog for an assembly is missing.
0x000036FF ERROR_SXS_MISSING_ASSEMBLY_IDENTITY_ATTRIBUTE	The supplied assembly identity is missing one or more attributes that must be present in this context.

Win32 error codes	Description
0x00003700 ERROR_SXS_INVALID_ASSEMBLY_IDENTITY_ATTRIBUTE_NAME	The supplied assembly identity has one or more attribute names that contain characters not permitted in XML names.
0x00003701 ERROR_SXS_ASSEMBLY_MISSING	The referenced assembly could not be found.
0x00003702 ERROR_SXS_CORRUPT_ACTIVATION_STACK	The activation context activation stack for the running thread of execution is corrupt.
0x00003703 ERROR_SXS_CORRUPTION	The application isolation metadata for this process or thread has become corrupt.
0x00003704 ERROR_SXS_EARLY_DEACTIVATION	The activation context being deactivated is not the most recently activated one.
0x00003705 ERROR_SXS_INVALID_DEACTIVATION	The activation context being deactivated is not active for the current thread of execution.
0x00003706 ERROR_SXS_MULTIPLE_DEACTIVATION	The activation context being deactivated has already been deactivated.
0x00003707 ERROR_SXS_PROCESS_TERMINATION_REQUESTED	A component used by the isolation facility has requested to terminate the process.
0x00003708 ERROR_SXS_RELEASE_ACTIVATION_ONTEXT	A kernel mode component is releasing a reference on an activation context.
0x00003709 ERROR_SXS_SYSTEM_DEFAULT_ACTIVATION_CONTEXT_EMPTY	The activation context of the system default assembly could not be generated.
0x0000370A ERROR_SXS_INVALID_IDENTITY_ATTRIBUTE_VALUE	The value of an attribute in an identity is not within the legal range.
0x0000370B ERROR_SXS_INVALID_IDENTITY_ATTRIBUTE_NAME	The name of an attribute in an identity is not within the legal range.
0x0000370C ERROR_SXS_IDENTITY_DUPLICATE_ATTRIBUTE	An identity contains two definitions for the same attribute.
0x0000370D ERROR_SXS_IDENTITY_PARSE_ERROR	The identity string is malformed. This <del>may</del> <b>might</b> be due to a trailing comma, more than two unnamed attributes, a missing attribute name, or a missing attribute value.
0x0000370E ERROR_MALFORMED_SUBSTITUTION_STRING	A string containing localized substitutable content was malformed. Either a dollar sign (\$) was followed by something

Win32 error codes	Description
	other than a left parenthesis or another dollar sign, or a substitution's right parenthesis was not found.
0x0000370F ERROR_SXS_INCORRECT_PUBLIC_KEY_OKEN	The public key token does not correspond to the public key specified.
0x00003710 ERROR_UNMAPPED_SUBSTITUTION_STRING	A substitution string had no mapping.
0x00003711 ERROR_SXS_ASSEMBLY_NOT_LOCKED	The component must be locked before making the request.
0x00003712 ERROR_SXS_COMPONENT_STORE_CORRUPT	The component store has been corrupted.
0x00003713 ERROR_ADVANCED_INSTALLER_FAILED	An advanced installer failed during setup or servicing.
0x00003714 ERROR_XML_ENCODING_MISMATCH	The character encoding in the XML declaration did not match the encoding used in the document.
0x00003715 ERROR_SXS_MANIFEST_IDENTITY_SAME_BUT_CONTENTS_DIFFERENT	The identities of the manifests are identical, but the contents are different.
0x00003716 ERROR_SXS_IDENTITIES_DIFFERENT	The component identities are different.
0x00003717 ERROR_SXS_ASSEMBLY_IS_NOT_A_DEPLOYMENT	The assembly is not a deployment.
0x00003718 ERROR_SXS_FILE_NOT_PART_OF_ASSEMBLY	The file is not a part of the assembly.
0x00003719 ERROR_SXS_MANIFEST_TOO_BIG	The size of the manifest exceeds the maximum allowed.
0x0000371A ERROR_SXS_SETTING_NOT_REGISTERED	The setting is not registered.
0x0000371B ERROR_SXS_TRANSACTION_CLOSURE_INCOMPLETE	One or more required members of the transaction are not present.
0x00003A98 ERROR_EVT_INVALID_CHANNEL_PATH	The specified channel path is invalid.
0x00003A99 ERROR_EVT_INVALID_QUERY	The specified query is invalid.
0x00003A9A ERROR_EVT_PUBLISHER_METADATA_NOT_FOUND	The publisher metadata cannot be found in the resource.
0x00003A9B	The template for an event definition cannot be found in the

Win32 error codes	Description
ERROR_EVT_EVENT_TEMPLATE_NOT_FOUND	resource (error = %1).
0x00003A9C ERROR_EVT_INVALID_PUBLISHER_NAME	The specified publisher name is invalid.
0x00003A9D ERROR_EVT_INVALID_EVENT_DATA	The event data raised by the publisher is not compatible with the event template definition in the publisher's manifest.
0x00003A9F ERROR_EVT_CHANNEL_NOT_FOUND	The specified channel could not be found. Check channel configuration.
0x00003AA0 ERROR_EVT_MALFORMED_XML_TEXT	The specified XML text was not well-formed. See extended error for more details.
0x00003AA1 ERROR_EVT_SUBSCRIPTION_TO_DIRECT_CHANNEL	The caller is trying to subscribe to a direct channel which is not allowed. The events for a direct channel go directly to a log file and cannot be subscribed to.
0x00003AA2 ERROR_EVT_CONFIGURATION_ERROR	Configuration error.
0x00003AA3 ERROR_EVT_QUERY_RESULT_STALE	The query result is stale or invalid. This <b>may</b> be due to the log being cleared or rolling over after the query result was created. Users should handle this code by releasing the query result object and reissuing the query.
0x00003AA4 ERROR_EVT_QUERY_RESULT_INVALID_POSITION	Query result is currently at an invalid position.
0x00003AA5 ERROR_EVT_NON_VALIDATING_MSXML	Registered Microsoft XML (MSXML) does not support validation.
0x00003AA6 ERROR_EVT_FILTER_ALREADYSCOPED	An expression can only be followed by a change-of-scope operation if it itself evaluates to a node set and is not already part of some other change-of-scope operation.
0x00003AA7 ERROR_EVT_FILTER_NOTELTSET	Cannot perform a step operation from a term that does not represent an element set.
0x00003AA8 ERROR_EVT_FILTER_INVARG	Left side arguments to binary operators must be either attributes, nodes, or variables and right side arguments must be constants.
0x00003AA9 ERROR_EVT_FILTER_INVTEST	A step operation must involve either a node test or, in the case

Win32 error codes	Description
	of a predicate, an algebraic expression against which to test each node in the node set identified by the preceding node set can be evaluated.
0x00003AAA ERROR_EVT_FILTER_INVTYPE	This data type is currently unsupported.
0x00003AAB ERROR_EVT_FILTER_PARSEERR	A syntax error occurred at position %1!d!
0x00003AAC ERROR_EVT_FILTER_UNSUPPORTEDOP	This operator is unsupported by this implementation of the filter.
0x00003AAD ERROR_EVT_FILTER_UNEXPECTEDTOKEN	The token encountered was unexpected.
0x00003AAE ERROR_EVT_INVALID_OPERATION_OVER_ENABLED_DIRECT_CHANNEL	The requested operation cannot be performed over an enabled direct channel. The channel must first be disabled before performing the requested operation.
0x00003AAF ERROR_EVT_INVALID_CHANNEL_PROPERTY_VALUE	Channel property %1!s! contains an invalid value. The value has an invalid type, is outside the valid range, cannot be updated, or is not supported by this type of channel.
0x00003AB0 ERROR_EVT_INVALID_PUBLISHER_PROPERTY_VALUE	Publisher property %1!s! contains an invalid value. The value has an invalid type, is outside the valid range, cannot be updated, or is not supported by this type of publisher.
0x00003AB1 ERROR_EVT_CHANNEL_CANNOT_ACTIVATE	The channel fails to activate.
0x00003AB2 ERROR_EVT_FILTER_TOO_COMPLEX	The xpath expression exceeded supported complexity. Simplify it or split it into two or more simple expressions.
0x00003AB3 ERROR_EVT_MESSAGE_NOT_FOUND	The message resource is present but the message is not found in the string or message table.
0x00003AB4 ERROR_EVT_MESSAGE_ID_NOT_FOUND	The message ID for the desired message could not be found.
0x00003AB5 ERROR_EVT_UNRESOLVED_VALUE_INSERT	The substitution string for the insert index (%1) could not be found.
0x00003AB6 ERROR_EVT_UNRESOLVED_PARAMETER_INSERT	The description string for the parameter reference (%1) could not be found.

<b>Win32 error codes</b>	<b>Description</b>
0x00003AB7 ERROR_EVT_MAX_INSERTS_REACHED	The maximum number of replacements has been reached.
0x00003AB8 ERROR_EVT_EVENT_DEFINITION_NOT_OUND	The event definition could not be found for the event ID (%1).
0x00003AB9 ERROR_EVT_MESSAGE_LOCALE_NOT_FOUND	The locale-specific resource for the desired message is not present.
0x00003ABA ERROR_EVT_VERSION_TOO_OLD	The resource is too old to be compatible.
0x00003ABB ERROR_EVT_VERSION_TOO_NEW	The resource is too new to be compatible.
0x00003ABC ERROR_EVT_CANNOT_OPEN_CHANNEL_OF_QUERY	The channel at index %1 of the query cannot be opened.
0x00003ABD ERROR_EVT_PUBLISHER_DISABLED	The publisher has been disabled and its resource is not available. This usually occurs when the publisher is in the process of being uninstalled or upgraded.
0x00003AE8 ERROR_EC_SUBSCRIPTION_CANNOT_ACTIVATE	The subscription fails to activate.
0x00003AE9 ERROR_EC_LOG_DISABLED	The log of the subscription is in a disabled state and events cannot be forwarded to it. The log must first be enabled before the subscription can be activated.
0x00003AFC ERROR_MUI_FILE_NOT_FOUND	The resource loader failed to find the Multilingual User Interface (MUI) file.
0x00003AFD ERROR_MUI_INVALID_FILE	The resource loader failed to load the MUI file because the file failed to pass validation.
0x00003AFE ERROR_MUI_INVALID_RC_CONFIG	The release candidate (RC) manifest is corrupted with garbage data, is an unsupported version, or is missing a required item.
0x00003AFF ERROR_MUI_INVALID_LOCALE_NAME	The RC manifest has an invalid culture name.
0x00003B00 ERROR_MUI_INVALID_ULTIMATEFALLBACK_NAME	The RC Manifest has an invalid ultimate fallback name.
0x00003B01 ERROR_MUI_FILE_NOT_LOADED	The resource loader cache does not have a loaded MUI entry.
0x00003B02 ERROR_RESOURCE_ENUM_USER_STOP	The user stopped resource enumeration.


<b>Win32 error codes</b>	<b>Description</b>
0x00003B03 ERROR_MUI_INTLSETTINGS_UILANG_NOT_INSTALLED	User interface language installation failed.
0x00003B04 ERROR_MUI_INTLSETTINGS_INVALID_LOCALE_NAME	Locale installation failed.
0x00003B60 ERROR_MCA_INVALID_CAPABILITIES_STRING	The monitor returned a DDC/CI capabilities string that did not comply with the ACCESS.bus 3.0, DDC/CI 1.1, or MCCS 2 Revision 1 specification.
0x00003B61 ERROR_MCA_INVALID_VCP_VERSION	The monitor's VCP version (0xDF) VCP code returned an invalid version value.
0x00003B62 ERROR_MCA_MONITOR_VIOLATES_MCCS_SPECIFICATION	The monitor does not comply with the MCCS specification it claims to support.
0x00003B63 ERROR_MCA_MCCS_VERSION_MISMATCH	The MCCS version in a monitor's mcs_ver capability does not match the MCCS version the monitor reports when the VCP version (0xDF) VCP code is used.
0x00003B64 ERROR_MCA_UNSUPPORTED_MCCS_VERSION	The monitor configuration API works only with monitors that support the MCCS 1.0, MCCS 2.0, or MCCS 2.0 Revision 1 specifications.
0x00003B65 ERROR_MCA_INTERNAL_ERROR	An internal monitor configuration API error occurred.
0x00003B66 ERROR_MCA_INVALID_TECHNOLOGY_TYPE_RETURNED	The monitor returned an invalid monitor technology type. CRT, plasma, and LCD (TFT) are examples of monitor technology types. This error implies that the monitor violated the MCCS 2.0 or MCCS 2.0 Revision 1 specification.
0x00003B67 ERROR_MCA_UNSUPPORTED_COLOR_TEMPERATURE	The SetMonitorColorTemperature() caller passed a color temperature to it that the current monitor did not support. CRT, plasma, and LCD (TFT) are examples of monitor technology types. This error implies that the monitor violated the MCCS 2.0 or MCCS 2.0 Revision 1 specification.
0x00003B92 ERROR_AMBIGUOUS_SYSTEM_DEVICE	The requested system device cannot be identified due to multiple indistinguishable devices potentially matching the identification criteria.

Win32 error codes	Description
0x00003BC3 ERROR_SYSTEM_DEVICE_NOT_FOUND	The requested system device cannot be found.

## 2.3 NTSTATUS

Values are 32 bit and are laid out as follows. The following diagram is independent of endianness; that is, the diagram is shown in host byte order and merely shows the layout of the numbering space.

Any protocol that uses NTSTATUS values on the wire is responsible for stating the order that the bytes are placed on the wire.

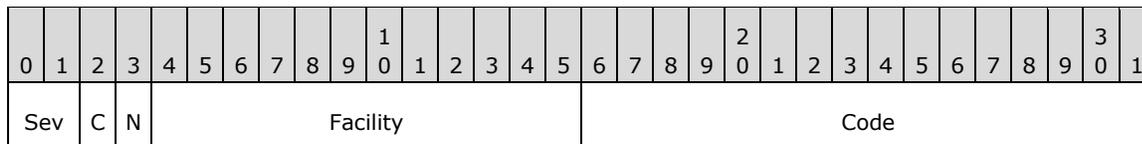

**Sev (2 bits):** Severity. Severity codes are as follows.

Value	Meaning
STATUS_SEVERITY_SUCCESS 0x0	Success
STATUS_SEVERITY_INFORMATIONAL 0x1	Informational
STATUS_SEVERITY_WARNING 0x2	Warning
STATUS_SEVERITY_ERROR 0x3	Error

**C (1 bit):** Customer. This specifies if the value is customer- or Microsoft-defined. This bit is set for customer-defined values and clear for Microsoft-defined values. <43>

**N (1 bit):** Reserved. MUST be set to 0 so that it is possible to map an NTSTATUS value to an equivalent HRESULT value, as specified in section 2.1, by setting this bit.

**Facility (12 bits):** A value that, together with the C bit, indicates the numbering space to use for the Code field. <54>

**Code (2 bytes):** The remainder of the error code. Vendors SHOULD reuse the values in the following table with their indicated meaning or define their own values with the C bit set. Choosing any other value with the C bit clear runs the risk of a collision in the future.

### 2.3.1 NTSTATUS values

By combining the NTSTATUS into a single 32-bit numbering space, the following NTSTATUS values are defined. Most values also have a defined default message that can be used to map the value to a human-readable text message. When this is done, the NTSTATUS value is also known as a message identifier.

This document provides the common usage details of the NTSTATUS values; individual protocol specifications **may** provide expanded or modified definitions **when needed**.

In the following descriptions, a percentage sign that is followed by one or more alphanumeric characters (for example, "%1" or "%hs") indicates a variable that is replaced by text at the time the value is returned.

<b>Return value/code</b>	<b>Description</b>
0x00000000 STATUS_SUCCESS	The operation completed successfully.
0x00000000 STATUS_WAIT_0	The caller specified WaitAny for WaitType and one of the dispatcher objects in the Object array has been set to the signaled state.
0x00000001 STATUS_WAIT_1	The caller specified WaitAny for WaitType and one of the dispatcher objects in the Object array has been set to the signaled state.
0x00000002 STATUS_WAIT_2	The caller specified WaitAny for WaitType and one of the dispatcher objects in the Object array has been set to the signaled state.
0x00000003 STATUS_WAIT_3	The caller specified WaitAny for WaitType and one of the dispatcher objects in the Object array has been set to the signaled state.
0x0000003F STATUS_WAIT_63	The caller specified WaitAny for WaitType and one of the dispatcher objects in the Object array has been set to the signaled state.
0x00000080 STATUS_ABANDONED	The caller attempted to wait for a mutex that has been abandoned.
0x00000080 STATUS_ABANDONED_WAIT_0	The caller attempted to wait for a mutex that has been abandoned.
0x000000BF STATUS_ABANDONED_WAIT_63	The caller attempted to wait for a mutex that has been abandoned.
0x000000C0 STATUS_USER_APC	A user-mode APC was delivered before the given Interval expired.
0x00000101 STATUS_ALERTED	The delay completed because the thread was alerted.
0x00000102 STATUS_TIMEOUT	The given Timeout interval expired.
0x00000103 STATUS_PENDING	The operation that was requested is pending completion.
0x00000104 STATUS_REPARSE	A reparse should be performed by the Object Manager because the name of the file resulted in a symbolic link.

<b>Return value/code</b>	<b>Description</b>
0x00000105 STATUS_MORE_ENTRIES	Returned by enumeration APIs to indicate more information is available to successive calls.
0x00000106 STATUS_NOT_ALL_ASSIGNED	Indicates not all privileges or groups that are referenced are assigned to the caller. This allows, for example, all privileges to be disabled without having to know exactly which privileges are assigned.
0x00000107 STATUS_SOME_NOT_MAPPED	Some of the information to be translated has not been translated.
0x00000108 STATUS_OPLOCK_BREAK_IN_PROGRESS	An open/create operation completed while an opportunistic lock (oplock) break is underway.
0x00000109 STATUS_VOLUME_MOUNTED	A new volume has been mounted by a file system.
0x0000010A STATUS_RXACT_COMMITTED	This success level status indicates that the transaction state already exists for the registry subtree but that a transaction commit was previously aborted. The commit has now been completed.
0x0000010B STATUS_NOTIFY_CLEANUP	Indicates that a notify change request has been completed due to closing the handle that made the notify change request.
0x0000010C STATUS_NOTIFY_ENUM_DIR	Indicates that a notify change request is being completed and that the information is not being returned in the caller's buffer. The caller now needs to enumerate the files to find the changes.
0x0000010D STATUS_NO_QUOTAS_FOR_ACCOUNT	{No Quotas} No system quota limits are specifically set for this account.
0x0000010E STATUS_PRIMARY_TRANSPORT_CONNECT_FAILED	{Connect Failure on Primary Transport} An attempt was made to connect to the remote server %hs on the primary transport, but the connection failed. The computer WAS able to connect on a secondary transport.
0x00000110 STATUS_PAGE_FAULT_TRANSITION	The page fault was a transition fault.
0x00000111 STATUS_PAGE_FAULT_DEMAND_ZERO	The page fault was a demand zero fault.
0x00000112 STATUS_PAGE_FAULT_COPY_ON_WRITE	The page fault was a demand zero fault.
0x00000113 STATUS_PAGE_FAULT_GUARD_PAGE	The page fault was a demand zero fault.

<b>Return value/code</b>	<b>Description</b>
0x00000114 STATUS_PAGE_FAULT_PAGING_FILE	The page fault was satisfied by reading from a secondary storage device.
0x00000115 STATUS_CACHE_PAGE_LOCKED	The cached page was locked during operation.
0x00000116 STATUS_CRASH_DUMP	The crash dump exists in a paging file.
0x00000117 STATUS_BUFFER_ALL_ZEROS	The specified buffer contains all zeros.
0x00000118 STATUS_REPARSE_OBJECT	A reparse should be performed by the Object Manager because the name of the file resulted in a symbolic link.
0x00000119 STATUS_RESOURCE_REQUIREMENTS_CHANGED	The device has succeeded a query-stop and its resource requirements have changed.
0x00000120 STATUS_TRANSLATION_COMPLETE	The translator has translated these resources into the global space and no additional translations should be performed.
0x00000121 STATUS_DS_MEMBERSHIP_EVALUATED_LOCALLY	The directory service evaluated group memberships locally, because it was unable to contact a global catalog server.
0x00000122 STATUS_NOTHING_TO_TERMINATE	A process being terminated has no threads to terminate.
0x00000123 STATUS_PROCESS_NOT_IN_JOB	The specified process is not part of a job.
0x00000124 STATUS_PROCESS_IN_JOB	The specified process is part of a job.
0x00000125 STATUS_VOLSNAP_HIBERNATE_READY	{Volume Shadow Copy Service} The system is now ready for hibernation.
0x00000126 STATUS_FSFILTER_OP_COMPLETED_SUCCESSFULLY	A file system or file system filter driver has successfully completed an FsFilter operation.
0x00000127 STATUS_INTERRUPT_VECTOR_ALREADY_CONNECTED	The specified interrupt vector was already connected.
0x00000128 STATUS_INTERRUPT_STILL_CONNECTED	The specified interrupt vector is still connected.
0x00000129 STATUS_PROCESS_CLONED	The current process is a cloned process.
0x0000012A STATUS_FILE_LOCKED_WITH_ONLY_READERS	The file was locked and all users of the file can only read.
0x0000012B STATUS_FILE_LOCKED_WITH_WRITERS	The file was locked and at least one user of the file can write.

Return value/code	Description
0x00000202 STATUS_RESOURCEMANAGER_READ_ONLY	The specified ResourceManager made no changes or updates to the resource under this transaction.
0x00000367 STATUS_WAIT_FOR_OPLOCK	An operation is blocked and waiting for an oplock.
0x00010001 DBG_EXCEPTION_HANDLED	Debugger handled the exception.
0x00010002 DBG_CONTINUE	The debugger continued.
0x001C0001 STATUS_FLT_IO_COMPLETE	The IO was completed by a filter.
0xC0000467 STATUS_FILE_NOT_AVAILABLE	The file is temporarily unavailable.
<a href="#">0xC0000480</a> <a href="#">STATUS_SHARE_UNAVAILABLE</a>	<a href="#">The share is temporarily unavailable.</a>
0xC0000721 STATUS_CALLBACK_RETURNED_THREAD_AFFINITY	A threadpool worker thread entered a callback at thread affinity %p and exited at affinity %p. This is unexpected, indicating that the callback missed restoring the priority.
0x40000000 STATUS_OBJECT_NAME_EXISTS	{Object Exists} An attempt was made to create an object but the object name already exists.
0x40000001 STATUS_THREAD_WAS_SUSPENDED	{Thread Suspended} A thread termination occurred while the thread was suspended. The thread resumed, and termination proceeded.
0x40000002 STATUS_WORKING_SET_LIMIT_RANGE	{Working Set Range Error} An attempt was made to set the working set minimum or maximum to values that are outside the allowable range.
0x40000003 STATUS_IMAGE_NOT_AT_BASE	{Image Relocated} An image file could not be mapped at the address that is specified in the image file. Local fixes must be performed on this image.
0x40000004 STATUS_RXACT_STATE_CREATED	This informational level status indicates that a specified registry subtree transaction state did not yet exist and had to be created.
0x40000005 STATUS_SEGMENT_NOTIFICATION	{Segment Load} A virtual DOS machine (VDM) is loading, unloading, or moving an MS-DOS or Win16 program segment image. An exception is raised so that a debugger can load, unload, or track symbols and breakpoints within these 16-bit segments.

Return value/code	Description
0x40000006 STATUS_LOCAL_USER_SESSION_KEY	{Local Session Key} A user session key was requested for a local remote procedure call (RPC) connection. The session key that is returned is a constant value and not unique to this connection.
0x40000007 STATUS_BAD_CURRENT_DIRECTORY	{Invalid Current Directory} The process cannot switch to the startup current directory %hs. Select OK to set the current directory to %hs, or select CANCEL to exit.
0x40000008 STATUS_SERIAL_MORE_WRITES	{Serial IOCTL Complete} A serial I/O operation was completed by another write to a serial port. (The IOCTL_SERIAL_XOFF_COUNTER reached zero.)
0x40000009 STATUS_REGISTRY_RECOVERED	{Registry Recovery} One of the files that contains the system registry data had to be recovered by using a log or alternate copy. The recovery was successful.
0x4000000A STATUS_FT_READ_RECOVERY_FROM_BACKUP	{Redundant Read} To satisfy a read request, the Windows NT fault-tolerant file system successfully read the requested data from a redundant copy. This was done because the file system encountered a failure on a member of the fault-tolerant volume but was unable to reassign the failing area of the device.
0x4000000B STATUS_FT_WRITE_RECOVERY	{Redundant Write} To satisfy a write request, the Windows NT fault-tolerant file system successfully wrote a redundant copy of the information. This was done because the file system encountered a failure on a member of the fault-tolerant volume but was unable to reassign the failing area of the device.
0x4000000C STATUS_SERIAL_COUNTER_TIMEOUT	{Serial IOCTL Timeout} A serial I/O operation completed because the time-out period expired. (The IOCTL_SERIAL_XOFF_COUNTER had not reached zero.)
0x4000000D STATUS_NULL_LM_PASSWORD	{Password Too Complex} The Windows password is too complex to be converted to a LAN Manager password. The LAN Manager password that returned is a NULL string.
0x4000000E STATUS_IMAGE_MACHINE_TYPE_MISMATCH	{Machine Type Mismatch} The image file %hs is valid but is for a machine type other than the current machine. Select OK to continue, or CANCEL to fail the DLL load.
0x4000000F STATUS_RECEIVE_PARTIAL	{Partial Data Received} The network transport returned partial data to its client. The remaining data will be sent

Return value/code	Description
	later.
0x40000010 STATUS_RECEIVE_EXPEDITED	{Expedited Data Received} The network transport returned data to its client that was marked as expedited by the remote system.
0x40000011 STATUS_RECEIVE_PARTIAL_EXPEDITED	{Partial Expedited Data Received} The network transport returned partial data to its client and this data was marked as expedited by the remote system. The remaining data will be sent later.
0x40000012 STATUS_EVENT_DONE	{TDI Event Done} The TDI indication has completed successfully.
0x40000013 STATUS_EVENT_PENDING	{TDI Event Pending} The TDI indication has entered the pending state.
0x40000014 STATUS_CHECKING_FILE_SYSTEM	Checking file system on %wZ.
0x40000015 STATUS_FATAL_APP_EXIT	{Fatal Application Exit} %hs
0x40000016 STATUS_PREDEFINED_HANDLE	The specified registry key is referenced by a predefined handle.
0x40000017 STATUS_WAS_UNLOCKED	{Page Unlocked} The page protection of a locked page was changed to 'No Access' and the page was unlocked from memory and from the process.
0x40000018 STATUS_SERVICE_NOTIFICATION	%hs
0x40000019 STATUS_WAS_LOCKED	{Page Locked} One of the pages to lock was already locked.
0x4000001A STATUS_LOG_HARD_ERROR	Application popup: %1 : %2
0x4000001B STATUS_ALREADY_WIN32	A Win32 process already exists.
0x4000001C STATUS_WX86_UNSIMULATE	An exception status code that is used by the Win32 x86 emulation subsystem.
0x4000001D STATUS_WX86_CONTINUE	An exception status code that is used by the Win32 x86 emulation subsystem.
0x4000001E STATUS_WX86_SINGLE_STEP	An exception status code that is used by the Win32 x86 emulation subsystem.
0x4000001F STATUS_WX86_BREAKPOINT	An exception status code that is used by the Win32 x86 emulation subsystem.
0x40000020 STATUS_WX86_EXCEPTION_CONTINUE	An exception status code that is used by the Win32 x86 emulation subsystem.

<b>Return value/code</b>	<b>Description</b>
0x40000021 STATUS_WX86_EXCEPTION_LASTCHANCE	An exception status code that is used by the Win32 x86 emulation subsystem.
0x40000022 STATUS_WX86_EXCEPTION_CHAIN	An exception status code that is used by the Win32 x86 emulation subsystem.
0x40000023 STATUS_IMAGE_MACHINE_TYPE_MISMATCH_EXE	{Machine Type Mismatch} The image file %hs is valid but is for a machine type other than the current machine.
0x40000024 STATUS_NO_YIELD_PERFORMED	A yield execution was performed and no thread was available to run.
0x40000025 STATUS_TIMER_RESUME_IGNORED	The resume flag to a timer API was ignored.
0x40000026 STATUS_ARBITRATION_UNHANDLED	The arbiter has deferred arbitration of these resources to its parent.
0x40000027 STATUS_CARDBUS_NOT_SUPPORTED	The device has detected a CardBus card in its slot.
0x40000028 STATUS_WX86_CREATEWX86TIB	An exception status code that is used by the Win32 x86 emulation subsystem.
0x40000029 STATUS_MP_PROCESSOR_MISMATCH	The CPUs in this multiprocessor system are not all the same revision level. To use all processors, the operating system restricts itself to the features of the least capable processor in the system. If problems occur with this system, contact the CPU manufacturer to see if this mix of processors is supported.
0x4000002A STATUS_HIBERNATED	The system was put into hibernation.
0x4000002B STATUS_RESUME_HIBERNATION	The system was resumed from hibernation.
0x4000002C STATUS_FIRMWARE_UPDATED	Windows has detected that the system firmware (BIOS) was updated [previous firmware date = %2, current firmware date %3].
0x4000002D STATUS_DRIVERS_LEAKING_LOCKED_PAGES	A device driver is leaking locked I/O pages and is causing system degradation. The system has automatically enabled the tracking code to try and catch the culprit.
0x4000002E STATUS_MESSAGE_RETRIEVED	The ALPC message being canceled has already been retrieved from the queue on the other side.
0x4000002F STATUS_SYSTEM_POWERSTATE_TRANSITION	The system power state is transitioning from %2 to %3.
0x40000030	The receive operation was successful. Check the ALPC completion list for the

<b>Return value/code</b>	<b>Description</b>
STATUS_ALPC_CHECK_COMPLETION_LIST	received message.
0x40000031 STATUS_SYSTEM_POWERSTATE_COMPLEX_TRANSITION	The system power state is transitioning from %2 to %3 but could enter %4.
0x40000032 STATUS_ACCESS_AUDIT_BY_POLICY	Access to %1 is monitored by policy rule %2.
0x40000033 STATUS_ABANDON_HIBERFILE	A valid hibernation file has been invalidated and should be abandoned.
0x40000034 STATUS_BIZRULES_NOT_ENABLED	Business rule scripts are disabled for the calling application.
0x40000294 STATUS_WAKE_SYSTEM	The system has awoken.
0x40000370 STATUS_DS_SHUTTING_DOWN	The directory service is shutting down.
0x40010001 DBG_REPLY_LATER	Debugger will reply later.
0x40010002 DBG_UNABLE_TO_PROVIDE_HANDLE	Debugger cannot provide a handle.
0x40010003 DBG_TERMINATE_THREAD	Debugger terminated the thread.
0x40010004 DBG_TERMINATE_PROCESS	Debugger terminated the process.
0x40010005 DBG_CONTROL_C	Debugger obtained control of C.
0x40010006 DBG_PRINTEXCEPTION_C	Debugger printed an exception on control C.
0x40010007 DBG_RIPEXCEPTION	Debugger received a RIP exception.
0x40010008 DBG_CONTROL_BREAK	Debugger received a control break.
0x40010009 DBG_COMMAND_EXCEPTION	Debugger command communication exception.
0x40020056 RPC_NT_UUID_LOCAL_ONLY	A UUID that is valid only on this computer has been allocated.
0x400200AF RPC_NT_SEND_INCOMPLETE	Some data remains to be sent in the request buffer.
0x400A0004 STATUS_CTX_CDM_CONNECT	The Client Drive Mapping Service has connected on Terminal Connection.
0x400A0005	The Client Drive Mapping Service has

Return value/code	Description
STATUS_CTX_CDM_DISCONNECT	disconnected on Terminal Connection.
0x4015000D STATUS_SXS_RELEASE_ACTIVATION_CONTEXT	A kernel mode component is releasing a reference on an activation context.
0x40190034 STATUS_RECOVERY_NOT_NEEDED	The transactional resource manager is already consistent. Recovery is not needed.
0x40190035 STATUS_RM_ALREADY_STARTED	The transactional resource manager has already been started.
0x401A000C STATUS_LOG_NO_RESTART	The log service encountered a log stream with no restart area.
0x401B00EC STATUS_VIDEO_DRIVER_DEBUG_REPORT_REQUEST	{Display Driver Recovered From Failure} The %hs display driver has detected a failure and recovered from it. Some graphical operations <b>may</b> have failed. The next time you restart the machine, a dialog box appears, giving you an opportunity to upload data about this failure to Microsoft.
0x401E000A STATUS_GRAPHICS_PARTIAL_DATA_POPULATED	The specified buffer is not big enough to contain the entire requested dataset. Partial data is populated up to the size of the buffer.  The caller needs to provide a buffer of the size as specified in the partially populated buffer's content (interface specific).
0x401E0117 STATUS_GRAPHICS_DRIVER_MISMATCH	The kernel driver detected a version mismatch between it and the user mode driver.
0x401E0307 STATUS_GRAPHICS_MODE_NOT_PINNED	No mode is pinned on the specified VidPN source/target.
0x401E031E STATUS_GRAPHICS_NO_PREFERRED_MODE	The specified mode set does not specify a preference for one of its modes.
0x401E034B STATUS_GRAPHICS_DATASET_IS_EMPTY	The specified dataset (for example, mode set, frequency range set, descriptor set, or topology) is empty.
0x401E034C STATUS_GRAPHICS_NO_MORE_ELEMENTS_IN_DATASET	The specified dataset (for example, mode set, frequency range set, descriptor set, or topology) does not contain any more elements.
0x401E0351 STATUS_GRAPHICS_PATH_CONTENT_GEOMETRY_TRANSFORMATION_NOT_PINNED	The specified content transformation is not pinned on the specified VidPN present path.
0x401E042F STATUS_GRAPHICS_UNKNOWN_CHILD_STATUS	The child device presence was not reliably detected.
0x401E0437	Starting the lead adapter in a linked configuration has been temporarily

Return value/code	Description
STATUS_GRAPHICS_LEADLINK_START_DEFERRED	deferred.
0x401E0439 STATUS_GRAPHICS_POLLING_TOO_FREQUENTLY	The display adapter is being polled for children too frequently at the same polling level.
0x401E043A STATUS_GRAPHICS_START_DEFERRED	Starting the adapter has been temporarily deferred.
0x40230001 STATUS_NDIS_INDICATION_REQUIRED	The request will be completed later by an NDIS status indication.
0x80000001 STATUS_GUARD_PAGE_VIOLATION	{EXCEPTION} Guard Page Exception A page of memory that marks the end of a data structure, such as a stack or an array, has been accessed.
0x80000002 STATUS_DATATYPE_MISALIGNMENT	{EXCEPTION} Alignment Fault A data type misalignment was detected in a load or store instruction.
0x80000003 STATUS_BREAKPOINT	{EXCEPTION} Breakpoint A breakpoint has been reached.
0x80000004 STATUS_SINGLE_STEP	{EXCEPTION} Single Step A single step or trace operation has just been completed.
0x80000005 STATUS_BUFFER_OVERFLOW	{Buffer Overflow} The data was too large to fit into the specified buffer.
0x80000006 STATUS_NO_MORE_FILES	{No More Files} No more files were found which match the file specification.
0x80000007 STATUS_WAKE_SYSTEM_DEBUGGER	{Kernel Debugger Awakened} The system debugger was awakened by an interrupt.
0x8000000A STATUS_HANDLES_CLOSED	{Handles Closed} Handles to objects have been automatically closed because of the requested operation.
0x8000000B STATUS_NO_INHERITANCE	{Non-Inheritable ACL} An access control list (ACL) contains no components that can be inherited.
0x8000000C STATUS_GUID_SUBSTITUTION_MADE	{GUID Substitution} During the translation of a globally unique identifier (GUID) to a Windows security ID (SID), no administratively defined GUID prefix was found. A substitute prefix was used, which will not compromise system security. However, this <b>may</b> provide a more restrictive access than intended.
0x8000000D STATUS_PARTIAL_COPY	Because of protection conflicts, not all the requested bytes could be copied.
0x8000000E STATUS_DEVICE_PAPER_EMPTY	{Out of Paper} The printer is out of paper.

Return value/code	Description
0x8000000F STATUS_DEVICE_POWERED_OFF	{Device Power Is Off} The printer power has been turned off.
0x80000010 STATUS_DEVICE_OFF_LINE	{Device Offline} The printer has been taken offline.
0x80000011 STATUS_DEVICE_BUSY	{Device Busy} The device is currently busy.
0x80000012 STATUS_NO_MORE_EAS	{No More EAs} No more extended attributes (EAs) were found for the file.
0x80000013 STATUS_INVALID_EA_NAME	{Illegal EA} The specified extended attribute (EA) name contains at least one illegal character.
0x80000014 STATUS_EA_LIST_INCONSISTENT	{Inconsistent EA List} The extended attribute (EA) list is inconsistent.
0x80000015 STATUS_INVALID_EA_FLAG	{Invalid EA Flag} An invalid extended attribute (EA) flag was set.
0x80000016 STATUS_VERIFY_REQUIRED	{Verifying Disk} The media has changed and a verify operation is in progress; therefore, no reads or writes <b>maycan</b> be performed to the device, except those that are used in the verify operation.
0x80000017 STATUS_EXTRANEIOUS_INFORMATION	{Too Much Information} The specified access control list (ACL) contained more information than was expected.
0x80000018 STATUS_RXACT_COMMIT_NECESSARY	This warning level status indicates that the transaction state already exists for the registry subtree, but that a transaction commit was previously aborted. The commit has NOT been completed but has not been rolled back either; therefore, it <b>maycan</b> still be committed, if needed.
0x8000001A STATUS_NO_MORE_ENTRIES	{No More Entries} No more entries are available from an enumeration operation.
0x8000001B STATUS_FILEMARK_DETECTED	{Filemark Found} A filemark was detected.
0x8000001C STATUS_MEDIA_CHANGED	{Media Changed} The media <b>may havehas</b> changed.
0x8000001D STATUS_BUS_RESET	{I/O Bus Reset} An I/O bus reset was detected.
0x8000001E STATUS_END_OF_MEDIA	{End of Media} The end of the media was encountered.
0x8000001F STATUS_BEGINNING_OF_MEDIA	The beginning of a tape or partition has been detected.

Return value/code	Description
0x80000020 STATUS_MEDIA_CHECK	{Media Changed} The media <b>maymight</b> have changed.
0x80000021 STATUS_SETMARK_DETECTED	A tape access reached a set mark.
0x80000022 STATUS_NO_DATA_DETECTED	During a tape access, the end of the data written is reached.
0x80000023 STATUS_REDIRECTOR_HAS_OPEN_HANDLES	The redirector is in use and cannot be unloaded.
0x80000024 STATUS_SERVER_HAS_OPEN_HANDLES	The server is in use and cannot be unloaded.
0x80000025 STATUS_ALREADY_DISCONNECTED	The specified connection has already been disconnected.
0x80000026 STATUS_LONGJUMP	A long jump has been executed.
0x80000027 STATUS_CLEANER_CARTRIDGE_INSTALLED	A cleaner cartridge is present in the tape library.
0x80000028 STATUS_PLUGPLAY_QUERY_VETOED	The Plug and Play query operation was not successful.
0x80000029 STATUS_UNWIND_CONSOLIDATE	A frame consolidation has been executed.
0x8000002A STATUS_REGISTRY_HIVE_RECOVERED	{Registry Hive Recovered} The registry hive (file): %hs was corrupted and it has been recovered. Some data might have been lost.
0x8000002B STATUS_DLL_MIGHT_BE_INSECURE	The application is attempting to run executable code from the module %hs. This <b>maymight</b> be insecure. An alternative, %hs, is available. Should the application use the secure module %hs?
0x8000002C STATUS_DLL_MIGHT_BE_INCOMPATIBLE	The application is loading executable code from the module %hs. This is secure but <b>maymight</b> be incompatible with previous releases of the operating system. An alternative, %hs, is available. Should the application use the secure module %hs?
0x8000002D STATUS_STOPPED_ON_SYMLINK	The create operation stopped after reaching a symbolic link.
0x80000288 STATUS_DEVICE_REQUIRES_CLEANING	The device has indicated that cleaning is necessary.
0x80000289 STATUS_DEVICE_DOOR_OPEN	The device has indicated that its door is open. Further operations require it closed and secured.

Return value/code	Description
0x80000803 STATUS_DATA_LOST_REPAIR	Windows discovered a corruption in the file %hs. This file has now been repaired. Check if any data in the file was lost because of the corruption.
0x80010001 DBG_EXCEPTION_NOT_HANDLED	Debugger did not handle the exception.
0x80130001 STATUS_CLUSTER_NODE_ALREADY_UP	The cluster node is already up.
0x80130002 STATUS_CLUSTER_NODE_ALREADY_DOWN	The cluster node is already down.
0x80130003 STATUS_CLUSTER_NETWORK_ALREADY_ONLINE	The cluster network is already online.
0x80130004 STATUS_CLUSTER_NETWORK_ALREADY_OFFLINE	The cluster network is already offline.
0x80130005 STATUS_CLUSTER_NODE_ALREADY_MEMBER	The cluster node is already a member of the cluster.
0x80190009 STATUS_COULD_NOT_RESIZE_LOG	The log could not be set to the requested size.
0x80190029 STATUS_NO_TXF_METADATA	There is no transaction metadata on the file.
0x80190031 STATUS_CANT_RECOVER_WITH_HANDLE_OPEN	The file cannot be recovered because there is a handle still open on it.
0x80190041 STATUS_TXF_METADATA_ALREADY_PRESENT	Transaction metadata is already present on this file and cannot be superseded.
0x80190042 STATUS_TRANSACTION_SCOPE_CALLBACKS_NOT_SET	A transaction scope could not be entered because the scope handler has not been initialized.
0x801B00EB STATUS_VIDEO_HUNG_DISPLAY_DRIVER_THREAD_RECOVERED	{Display Driver Stopped Responding and recovered} The %hs display driver has stopped working normally. The recovery had been performed.
0x801C0001 STATUS_FLT_BUFFER_TOO_SMALL	{Buffer too small} The buffer is too small to contain the entry. No information has been written to the buffer.
0x80210001 STATUS_FVE_PARTIAL_METADATA	Volume metadata read or write is incomplete.
0x80210002 STATUS_FVE_TRANSIENT_STATE	BitLocker encryption keys were ignored because the volume was in a transient state.
0xC0000001 STATUS_UNSUCCESSFUL	{Operation Failed} The requested operation was unsuccessful.
0xC0000002	{Not Implemented} The requested

<b>Return value/code</b>	<b>Description</b>
STATUS_NOT_IMPLEMENTED	operation is not implemented.
0xC0000003 STATUS_INVALID_INFO_CLASS	{Invalid Parameter} The specified information class is not a valid information class for the specified object.
0xC0000004 STATUS_INFO_LENGTH_MISMATCH	The specified information record length does not match the length that is required for the specified information class.
0xC0000005 STATUS_ACCESS_VIOLATION	The instruction at 0x%08lx referenced memory at 0x%08lx. The memory could not be %s.
0xC0000006 STATUS_IN_PAGE_ERROR	The instruction at 0x%08lx referenced memory at 0x%08lx. The required data was not placed into memory because of an I/O error status of 0x%08lx.
0xC0000007 STATUS_PAGEFILE_QUOTA	The page file quota for the process has been exhausted.
0xC0000008 STATUS_INVALID_HANDLE	An invalid HANDLE was specified.
0xC0000009 STATUS_BAD_INITIAL_STACK	An invalid initial stack was specified in a call to NtCreateThread.
0xC000000A STATUS_BAD_INITIAL_PC	An invalid initial start address was specified in a call to NtCreateThread.
0xC000000B STATUS_INVALID_CID	An invalid client ID was specified.
0xC000000C STATUS_TIMER_NOT_CANCELED	An attempt was made to cancel or set a timer that has an associated APC and the specified thread is not the thread that originally set the timer with an associated APC routine.
0xC000000D STATUS_INVALID_PARAMETER	An invalid parameter was passed to a service or function.
0xC000000E STATUS_NO_SUCH_DEVICE	A device that does not exist was specified.
0xC000000F STATUS_NO_SUCH_FILE	{File Not Found} The file %hs does not exist.
0xC0000010 STATUS_INVALID_DEVICE_REQUEST	The specified request is not a valid operation for the target device.
0xC0000011 STATUS_END_OF_FILE	The end-of-file marker has been reached. There is no valid data in the file beyond this marker.
0xC0000012 STATUS_WRONG_VOLUME	{Wrong Volume} The wrong volume is in the drive. Insert volume %hs into drive %hs.

<b>Return value/code</b>	<b>Description</b>
0xC0000013 STATUS_NO_MEDIA_IN_DEVICE	{No Disk} There is no disk in the drive. Insert a disk into drive %hs.
0xC0000014 STATUS_UNRECOGNIZED_MEDIA	{Unknown Disk Format} The disk in drive %hs is not formatted properly. Check the disk, and reformat it, if needed.
0xC0000015 STATUS_NONEXISTENT_SECTOR	{Sector Not Found} The specified sector does not exist.
0xC0000016 STATUS_MORE_PROCESSING_REQUIRED	{Still Busy} The specified I/O request packet (IRP) cannot be disposed of because the I/O operation is not complete.
0xC0000017 STATUS_NO_MEMORY	{Not Enough Quota} Not enough virtual memory or paging file quota is available to complete the specified operation.
0xC0000018 STATUS_CONFLICTING_ADDRESSES	{Conflicting Address Range} The specified address range conflicts with the address space.
0xC0000019 STATUS_NOT_MAPPED_VIEW	The address range to unmap is not a mapped view.
0xC000001A STATUS_UNABLE_TO_FREE_VM	The virtual memory cannot be freed.
0xC000001B STATUS_UNABLE_TO_DELETE_SECTION	The specified section cannot be deleted.
0xC000001C STATUS_INVALID_SYSTEM_SERVICE	An invalid system service was specified in a system service call.
0xC000001D STATUS_ILLEGAL_INSTRUCTION	{EXCEPTION} Illegal Instruction An attempt was made to execute an illegal instruction.
0xC000001E STATUS_INVALID_LOCK_SEQUENCE	{Invalid Lock Sequence} An attempt was made to execute an invalid lock sequence.
0xC000001F STATUS_INVALID_VIEW_SIZE	{Invalid Mapping} An attempt was made to create a view for a section that is bigger than the section.
0xC0000020 STATUS_INVALID_FILE_FOR_SECTION	{Bad File} The attributes of the specified mapping file for a section of memory cannot be read.
0xC0000021 STATUS_ALREADY_COMMITTED	{Already Committed} The specified address range is already committed.
0xC0000022 STATUS_ACCESS_DENIED	{Access Denied} A process has requested access to an object but has not been granted those access rights.
0xC0000023 STATUS_BUFFER_TOO_SMALL	{Buffer Too Small} The buffer is too small to contain the entry. No information has been written to the

Return value/code	Description
	buffer.
0xC0000024 STATUS_OBJECT_TYPE_MISMATCH	{Wrong Type} There is a mismatch between the type of object that is required by the requested operation and the type of object that is specified in the request.
0xC0000025 STATUS_NONCONTINUABLE_EXCEPTION	{EXCEPTION} Cannot Continue Windows cannot continue from this exception.
0xC0000026 STATUS_INVALID_DISPOSITION	An invalid exception disposition was returned by an exception handler.
0xC0000027 STATUS_UNWIND	Unwind exception code.
0xC0000028 STATUS_BAD_STACK	An invalid or unaligned stack was encountered during an unwind operation.
0xC0000029 STATUS_INVALID_UNWIND_TARGET	An invalid unwind target was encountered during an unwind operation.
0xC000002A STATUS_NOT_LOCKED	An attempt was made to unlock a page of memory that was not locked.
0xC000002B STATUS_PARITY_ERROR	A device parity error on an I/O operation.
0xC000002C STATUS_UNABLE_TO_DECOMMIT_VM	An attempt was made to decommit uncommitted virtual memory.
0xC000002D STATUS_NOT_COMMITTED	An attempt was made to change the attributes on memory that has not been committed.
0xC000002E STATUS_INVALID_PORT_ATTRIBUTES	Invalid object attributes specified to NtCreatePort or invalid port attributes specified to NtConnectPort.
0xC000002F STATUS_PORT_MESSAGE_TOO_LONG	The length of the message that was passed to NtRequestPort or NtRequestWaitReplyPort is longer than the maximum message that is allowed by the port.
0xC0000030 STATUS_INVALID_PARAMETER_MIX	An invalid combination of parameters was specified.
0xC0000031 STATUS_INVALID_QUOTA_LOWER	An attempt was made to lower a quota limit below the current usage.
0xC0000032 STATUS_DISK_CORRUPT_ERROR	{Corrupt Disk} The file system structure on the disk is corrupt and unusable. Run the Chkdsk utility on the volume %hs.
0xC0000033 STATUS_OBJECT_NAME_INVALID	The object name is invalid.
0xC0000034	The object name is not found.

<b>Return value/code</b>	<b>Description</b>
STATUS_OBJECT_NAME_NOT_FOUND	
0xC0000035 STATUS_OBJECT_NAME_COLLISION	The object name already exists.
0xC0000037 STATUS_PORT_DISCONNECTED	An attempt was made to send a message to a disconnected communication port.
0xC0000038 STATUS_DEVICE_ALREADY_ATTACHED	An attempt was made to attach to a device that was already attached to another device.
0xC0000039 STATUS_OBJECT_PATH_INVALID	The object path component was not a directory object.
0xC000003A STATUS_OBJECT_PATH_NOT_FOUND	{Path Not Found} The path %hs does not exist.
0xC000003B STATUS_OBJECT_PATH_SYNTAX_BAD	The object path component was not a directory object.
0xC000003C STATUS_DATA_OVERRUN	{Data Overrun} A data overrun error occurred.
0xC000003D STATUS_DATA_LATE_ERROR	{Data Late} A data late error occurred.
0xC000003E STATUS_DATA_ERROR	{Data Error} An error occurred in reading or writing data.
0xC000003F STATUS_CRC_ERROR	{Bad CRC} A cyclic redundancy check (CRC) checksum error occurred.
0xC0000040 STATUS_SECTION_TOO_BIG	{Section Too Large} The specified section is too big to map the file.
0xC0000041 STATUS_PORT_CONNECTION_REFUSED	The NtConnectPort request is refused.
0xC0000042 STATUS_INVALID_PORT_HANDLE	The type of port handle is invalid for the operation that is requested.
0xC0000043 STATUS_SHARING_VIOLATION	A file cannot be opened because the share access flags are incompatible.
0xC0000044 STATUS_QUOTA_EXCEEDED	Insufficient quota exists to complete the operation.
0xC0000045 STATUS_INVALID_PAGE_PROTECTION	The specified page protection was not valid.
0xC0000046 STATUS_MUTANT_NOT_OWNED	An attempt to release a mutant object was made by a thread that was not the owner of the mutant object.
0xC0000047 STATUS_SEMAPHORE_LIMIT_EXCEEDED	An attempt was made to release a semaphore such that its maximum count would have been exceeded.

<b>Return value/code</b>	<b>Description</b>
0xC0000048 STATUS_PORT_ALREADY_SET	An attempt was made to set the DebugPort or ExceptionPort of a process, but a port already exists in the process, or an attempt was made to set the CompletionPort of a file but a port was already set in the file, or an attempt was made to set the associated completion port of an ALPC port but it is already set.
0xC0000049 STATUS_SECTION_NOT_IMAGE	An attempt was made to query image information on a section that does not map an image.
0xC000004A STATUS_SUSPEND_COUNT_EXCEEDED	An attempt was made to suspend a thread whose suspend count was at its maximum.
0xC000004B STATUS_THREAD_IS_TERMINATING	An attempt was made to suspend a thread that has begun termination.
0xC000004C STATUS_BAD_WORKING_SET_LIMIT	An attempt was made to set the working set limit to an invalid value (for example, the minimum greater than maximum).
0xC000004D STATUS_INCOMPATIBLE_FILE_MAP	A section was created to map a file that is not compatible with an already existing section that maps the same file.
0xC000004E STATUS_SECTION_PROTECTION	A view to a section specifies a protection that is incompatible with the protection of the initial view.
0xC000004F STATUS_EAS_NOT_SUPPORTED	An operation involving EAs failed because the file system does not support EAs.
0xC0000050 STATUS_EA_TOO_LARGE	An EA operation failed because the EA set is too large.
0xC0000051 STATUS_NONEXISTENT_EA_ENTRY	An EA operation failed because the name or EA index is invalid.
0xC0000052 STATUS_NO_EAS_ON_FILE	The file for which EAs were requested has no EAs.
0xC0000053 STATUS_EA_CORRUPT_ERROR	The EA is corrupt and cannot be read.
0xC0000054 STATUS_FILE_LOCK_CONFLICT	A requested read/write cannot be granted due to a conflicting file lock.
0xC0000055 STATUS_LOCK_NOT_GRANTED	A requested file lock cannot be granted due to other existing locks.
0xC0000056 STATUS_DELETE_PENDING	A non-close operation has been requested of a file object that has a delete pending.
0xC0000057 STATUS_CTL_FILE_NOT_SUPPORTED	An attempt was made to set the control attribute on a file. This attribute is not supported in the destination file system.

Return value/code	Description
0xC0000058 STATUS_UNKNOWN_REVISION	Indicates a revision number that was encountered or specified is not one that is known by the service. It <del>may</del> <b>might</b> be a more recent revision than the service is aware of.
0xC0000059 STATUS_REVISION_MISMATCH	Indicates that two revision levels are incompatible.
0xC000005A STATUS_INVALID_OWNER	Indicates a particular security ID <del>may</del> <b>not</b> <del>cannot</del> be assigned as the owner of an object.
0xC000005B STATUS_INVALID_PRIMARY_GROUP	Indicates a particular security ID <del>may</del> <b>not</b> <del>cannot</del> be assigned as the primary group of an object.
0xC000005C STATUS_NO_IMPERSONATION_TOKEN	An attempt has been made to operate on an impersonation token by a thread that is not currently impersonating a client.
0xC000005D STATUS_CANT_DISABLE_MANDATORY	A mandatory group <del>may</del> <b>not</b> <del>cannot</del> be disabled.
0xC000005E STATUS_NO_LOGON_SERVERS	No logon servers are currently available to service the logon request.
0xC000005F STATUS_NO_SUCH_LOGON_SESSION	A specified logon session does not exist. It <del>may</del> <b>might</b> already have been terminated.
0xC0000060 STATUS_NO_SUCH_PRIVILEGE	A specified privilege does not exist.
0xC0000061 STATUS_PRIVILEGE_NOT_HELD	A required privilege is not held by the client.
0xC0000062 STATUS_INVALID_ACCOUNT_NAME	The name provided is not a properly formed account name.
0xC0000063 STATUS_USER_EXISTS	The specified account already exists.
0xC0000064 STATUS_NO_SUCH_USER	The specified account does not exist.
0xC0000065 STATUS_GROUP_EXISTS	The specified group already exists.
0xC0000066 STATUS_NO_SUCH_GROUP	The specified group does not exist.
0xC0000067 STATUS_MEMBER_IN_GROUP	The specified user account is already in the specified group account. Also used to indicate a group cannot be deleted because it contains a member.
0xC0000068 STATUS_MEMBER_NOT_IN_GROUP	The specified user account is not a member of the specified group account.

Return value/code	Description
0xC0000069 STATUS_LAST_ADMIN	Indicates the requested operation would disable or delete the last remaining administration account. This is not allowed to prevent creating a situation in which the system cannot be administrated.
0xC000006A STATUS_WRONG_PASSWORD	When trying to update a password, this return status indicates that the value provided as the current password is not correct.
0xC000006B STATUS_ILL_FORMED_PASSWORD	When trying to update a password, this return status indicates that the value provided for the new password contains values that are not allowed in passwords.
0xC000006C STATUS_PASSWORD_RESTRICTION	When trying to update a password, this status indicates that some password update rule has been violated. For example, the password <del>may</del> <u>might</u> not meet length criteria.
0xC000006D STATUS_LOGON_FAILURE	The attempted logon is invalid. This is either due to a bad username or authentication information.
0xC000006E STATUS_ACCOUNT_RESTRICTION	Indicates a referenced user name and authentication information are valid, but some user account restriction has prevented successful authentication (such as time-of-day restrictions).
0xC000006F STATUS_INVALID_LOGON_HOURS	The user account has time restrictions and <del>may not</del> <u>cannot</u> be logged onto at this time.
0xC0000070 STATUS_INVALID_WORKSTATION	The user account is restricted so that it <del>may not</del> <u>cannot</u> be used to log on from the source workstation.
0xC0000071 STATUS_PASSWORD_EXPIRED	The user account password has expired.
0xC0000072 STATUS_ACCOUNT_DISABLED	The referenced account is currently disabled and <del>may not</del> <u>cannot</u> be logged on to.
0xC0000073 STATUS_NONE_MAPPED	None of the information to be translated has been translated.
0xC0000074 STATUS_TOO_MANY_LUIDS_REQUESTED	The number of LUIDs requested <del>may not</del> <u>cannot</u> be allocated with a single allocation.
0xC0000075 STATUS_LUIDS_EXHAUSTED	Indicates there are no more LUIDs to allocate.
0xC0000076 STATUS_INVALID_SUB_AUTHORITY	Indicates the sub-authority value is invalid for the particular use.

<b>Return value/code</b>	<b>Description</b>
0xC0000077 STATUS_INVALID_ACL	Indicates the ACL structure is not valid.
0xC0000078 STATUS_INVALID_SID	Indicates the SID structure is not valid.
0xC0000079 STATUS_INVALID_SECURITY_DESCR	Indicates the SECURITY_DESCRIPTOR structure is not valid.
0xC000007A STATUS_PROCEDURE_NOT_FOUND	Indicates the specified procedure address cannot be found in the DLL.
0xC000007B STATUS_INVALID_IMAGE_FORMAT	{Bad Image} %hs is either not designed to run on Windows or it contains an error. Try installing the program again using the original installation media or contact your system administrator or the software vendor for support.
0xC000007C STATUS_NO_TOKEN	An attempt was made to reference a token that does not exist. This is typically done by referencing the token that is associated with a thread when the thread is not impersonating a client.
0xC000007D STATUS_BAD_INHERITANCE_ACL	Indicates that an attempt to build either an inherited ACL or ACE was not successful. This can be caused by a number of things. One of the more probable causes is the replacement of a CreatorId with a SID that did not fit into the ACE or ACL.
0xC000007E STATUS_RANGE_NOT_LOCKED	The range specified in NtUnlockFile was not locked.
0xC000007F STATUS_DISK_FULL	An operation failed because the disk was full.
0xC0000080 STATUS_SERVER_DISABLED	The GUID allocation server is disabled at the moment.
0xC0000081 STATUS_SERVER_NOT_DISABLED	The GUID allocation server is enabled at the moment.
0xC0000082 STATUS_TOO_MANY_GUIDS_REQUESTED	Too many GUIDs were requested from the allocation server at once.
0xC0000083 STATUS_GUIDS_EXHAUSTED	The GUIDs could not be allocated because the Authority Agent was exhausted.
0xC0000084 STATUS_INVALID_ID_AUTHORITY	The value provided was an invalid value for an identifier authority.
0xC0000085 STATUS_AGENTS_EXHAUSTED	No more authority agent values are available for the particular identifier authority value.

<b>Return value/code</b>	<b>Description</b>
0xC0000086 STATUS_INVALID_VOLUME_LABEL	An invalid volume label has been specified.
0xC0000087 STATUS_SECTION_NOT_EXTENDED	A mapped section could not be extended.
0xC0000088 STATUS_NOT_MAPPED_DATA	Specified section to flush does not map a data file.
0xC0000089 STATUS_RESOURCE_DATA_NOT_FOUND	Indicates the specified image file did not contain a resource section.
0xC000008A STATUS_RESOURCE_TYPE_NOT_FOUND	Indicates the specified resource type cannot be found in the image file.
0xC000008B STATUS_RESOURCE_NAME_NOT_FOUND	Indicates the specified resource name cannot be found in the image file.
0xC000008C STATUS_ARRAY_BOUNDS_EXCEEDED	{EXCEPTION} Array bounds exceeded.
0xC000008D STATUS_FLOAT_DENORMAL_OPERAND	{EXCEPTION} Floating-point denormal operand.
0xC000008E STATUS_FLOAT_DIVIDE_BY_ZERO	{EXCEPTION} Floating-point division by zero.
0xC000008F STATUS_FLOAT_INEXACT_RESULT	{EXCEPTION} Floating-point inexact result.
0xC0000090 STATUS_FLOAT_INVALID_OPERATION	{EXCEPTION} Floating-point invalid operation.
0xC0000091 STATUS_FLOAT_OVERFLOW	{EXCEPTION} Floating-point overflow.
0xC0000092 STATUS_FLOAT_STACK_CHECK	{EXCEPTION} Floating-point stack check.
0xC0000093 STATUS_FLOAT_UNDERFLOW	{EXCEPTION} Floating-point underflow.
0xC0000094 STATUS_INTEGER_DIVIDE_BY_ZERO	{EXCEPTION} Integer division by zero.
0xC0000095 STATUS_INTEGER_OVERFLOW	{EXCEPTION} Integer overflow.
0xC0000096 STATUS_PRIVILEGED_INSTRUCTION	{EXCEPTION} Privileged instruction.
0xC0000097 STATUS_TOO_MANY_PAGING_FILES	An attempt was made to install more paging files than the system supports.
0xC0000098 STATUS_FILE_INVALID	The volume for a file has been externally altered such that the opened file is no longer valid.

Return value/code	Description
0xC0000099 STATUS_ALLOTTED_SPACE_EXCEEDED	When a block of memory is allotted for future updates, such as the memory allocated to hold discretionary access control and primary group information, successive updates <b>may</b> exceed the amount of memory originally allotted. Because a quota <b>may</b> already have been charged to several processes that have handles to the object, it is not reasonable to alter the size of the allocated memory. Instead, a request that requires more memory than has been allotted must fail and the STATUS_ALLOTTED_SPACE_EXCEEDED error returned.
0xC000009A STATUS_INSUFFICIENT_RESOURCES	Insufficient system resources exist to complete the API.
0xC000009B STATUS_DFS_EXIT_PATH_FOUND	An attempt has been made to open a DFS exit path control file.
0xC000009C STATUS_DEVICE_DATA_ERROR	There are bad blocks (sectors) on the hard disk.
0xC000009D STATUS_DEVICE_NOT_CONNECTED	There is bad cabling, non-termination, or the controller is not able to obtain access to the hard disk.
0xC000009F STATUS_FREE_VM_NOT_AT_BASE	Virtual memory cannot be freed because the base address is not the base of the region and a region size of zero was specified.
0xC00000A0 STATUS_MEMORY_NOT_ALLOCATED	An attempt was made to free virtual memory that is not allocated.
0xC00000A1 STATUS_WORKING_SET_QUOTA	The working set is not big enough to allow the requested pages to be locked.
0xC00000A2 STATUS_MEDIA_WRITE_PROTECTED	{Write Protect Error} The disk cannot be written to because it is write-protected. Remove the write protection from the volume %hs in drive %hs.
0xC00000A3 STATUS_DEVICE_NOT_READY	{Drive Not Ready} The drive is not ready for use; its door <b>may</b> be open. Check drive %hs and make sure that a disk is inserted and that the drive door is closed.
0xC00000A4 STATUS_INVALID_GROUP_ATTRIBUTES	The specified attributes are invalid or are incompatible with the attributes for the group as a whole.
0xC00000A5 STATUS_BAD_IMPERSONATION_LEVEL	A specified impersonation level is invalid. Also used to indicate that a required impersonation level was not provided.
0xC00000A6 STATUS_CANT_OPEN_ANONYMOUS	An attempt was made to open an anonymous-level token. Anonymous

Return value/code	Description
	tokens <del>may not</del> cannot be opened.
0xC00000A7 STATUS_BAD_VALIDATION_CLASS	The validation information class requested was invalid.
0xC00000A8 STATUS_BAD_TOKEN_TYPE	The type of a token object is inappropriate for its attempted use.
0xC00000A9 STATUS_BAD_MASTER_BOOT_RECORD	The type of a token object is inappropriate for its attempted use.
0xC00000AA STATUS_INSTRUCTION_MISALIGNMENT	An attempt was made to execute an instruction at an unaligned address and the host system does not support unaligned instruction references.
0xC00000AB STATUS_INSTANCE_NOT_AVAILABLE	The maximum named pipe instance count has been reached.
0xC00000AC STATUS_PIPE_NOT_AVAILABLE	An instance of a named pipe cannot be found in the listening state.
0xC00000AD STATUS_INVALID_PIPE_STATE	The named pipe is not in the connected or closing state.
0xC00000AE STATUS_PIPE_BUSY	The specified pipe is set to complete operations and there are current I/O operations queued so that it cannot be changed to queue operations.
0xC00000AF STATUS_ILLEGAL_FUNCTION	The specified handle is not open to the server end of the named pipe.
0xC00000B0 STATUS_PIPE_DISCONNECTED	The specified named pipe is in the disconnected state.
0xC00000B1 STATUS_PIPE_CLOSING	The specified named pipe is in the closing state.
0xC00000B2 STATUS_PIPE_CONNECTED	The specified named pipe is in the connected state.
0xC00000B3 STATUS_PIPE_LISTENING	The specified named pipe is in the listening state.
0xC00000B4 STATUS_INVALID_READ_MODE	The specified named pipe is not in message mode.
0xC00000B5 STATUS_IO_TIMEOUT	{Device Timeout} The specified I/O operation on %hs was not completed before the time-out period expired.
0xC00000B6 STATUS_FILE_FORCED_CLOSED	The specified file has been closed by another process.
0xC00000B7 STATUS_PROFILING_NOT_STARTED	Profiling is not started.
0xC00000B8	Profiling is not stopped.

<b>Return value/code</b>	<b>Description</b>
STATUS_PROFILING_NOT_STOPPED	
0xC00000B9 STATUS_COULD_NOT_INTERPRET	The passed ACL did not contain the minimum required information.
0xC00000BA STATUS_FILE_IS_A_DIRECTORY	The file that was specified as a target is a directory, and the caller specified that it could be anything but a directory.
0xC00000BB STATUS_NOT_SUPPORTED	The request is not supported.
0xC00000BC STATUS_REMOTE_NOT_LISTENING	This remote computer is not listening.
0xC00000BD STATUS_DUPLICATE_NAME	A duplicate name exists on the network.
0xC00000BE STATUS_BAD_NETWORK_PATH	The network path cannot be located.
0xC00000BF STATUS_NETWORK_BUSY	The network is busy.
0xC00000C0 STATUS_DEVICE_DOES_NOT_EXIST	This device does not exist.
0xC00000C1 STATUS_TOO_MANY_COMMANDS	The network BIOS command limit has been reached.
0xC00000C2 STATUS_ADAPTER_HARDWARE_ERROR	An I/O adapter hardware error has occurred.
0xC00000C3 STATUS_INVALID_NETWORK_RESPONSE	The network responded incorrectly.
0xC00000C4 STATUS_UNEXPECTED_NETWORK_ERROR	An unexpected network error occurred.
0xC00000C5 STATUS_BAD_REMOTE_ADAPTER	The remote adapter is not compatible.
0xC00000C6 STATUS_PRINT_QUEUE_FULL	The print queue is full.
0xC00000C7 STATUS_NO_SPOOL_SPACE	Space to store the file that is waiting to be printed is not available on the server.
0xC00000C8 STATUS_PRINT_CANCELLED	The requested print file has been canceled.
0xC00000C9 STATUS_NETWORK_NAME_DELETED	The network name was deleted.
0xC00000CA STATUS_NETWORK_ACCESS_DENIED	Network access is denied.
0xC00000CB	{Incorrect Network Resource Type} The

Return value/code	Description
STATUS_BAD_DEVICE_TYPE	specified device type (LPT, for example) conflicts with the actual device type on the remote resource.
0xC00000CC STATUS_BAD_NETWORK_NAME	{Network Name Not Found} The specified share name cannot be found on the remote server.
0xC00000CD STATUS_TOO_MANY_NAMES	The name limit for the network adapter card of the local computer was exceeded.
0xC00000CE STATUS_TOO_MANY_SESSIONS	The network BIOS session limit was exceeded.
0xC00000CF STATUS_SHARING_PAUSED	File sharing has been temporarily paused.
0xC00000D0 STATUS_REQUEST_NOT_ACCEPTED	No more connections can be made to this remote computer at this time because the computer has already accepted the maximum number of connections.
0xC00000D1 STATUS_REDIRECTOR_PAUSED	Print or disk redirection is temporarily paused.
0xC00000D2 STATUS_NET_WRITE_FAULT	A network data fault occurred.
0xC00000D3 STATUS_PROFILING_AT_LIMIT	The number of active profiling objects is at the maximum and no more <b>maycan</b> be started.
0xC00000D4 STATUS_NOT_SAME_DEVICE	{Incorrect Volume} The destination file of a rename request is located on a different device than the source of the rename request.
0xC00000D5 STATUS_FILE_RENAMED	The specified file has been renamed and thus cannot be modified.
0xC00000D6 STATUS_VIRTUAL_CIRCUIT_CLOSED	{Network Request Timeout} The session with a remote server has been disconnected because the time-out interval for a request has expired.
0xC00000D7 STATUS_NO_SECURITY_ON_OBJECT	Indicates an attempt was made to operate on the security of an object that does not have security associated with it.
0xC00000D8 STATUS_CANT_WAIT	Used to indicate that an operation cannot continue without blocking for I/O.
0xC00000D9 STATUS_PIPE_EMPTY	Used to indicate that a read operation was done on an empty pipe.
0xC00000DA STATUS_CANT_ACCESS_DOMAIN_INFO	Configuration information could not be read from the domain controller, either because the machine is unavailable or access has been denied.

<b>Return value/code</b>	<b>Description</b>
0xC00000DB STATUS_CANT_TERMINATE_SELF	Indicates that a thread attempted to terminate itself by default (called NtTerminateThread with NULL) and it was the last thread in the current process.
0xC00000DC STATUS_INVALID_SERVER_STATE	Indicates the Sam Server was in the wrong state to perform the desired operation.
0xC00000DD STATUS_INVALID_DOMAIN_STATE	Indicates the domain was in the wrong state to perform the desired operation.
0xC00000DE STATUS_INVALID_DOMAIN_ROLE	This operation is only allowed for the primary domain controller of the domain.
0xC00000DF STATUS_NO_SUCH_DOMAIN	The specified domain did not exist.
0xC00000E0 STATUS_DOMAIN_EXISTS	The specified domain already exists.
0xC00000E1 STATUS_DOMAIN_LIMIT_EXCEEDED	An attempt was made to exceed the limit on the number of domains per server for this release.
0xC00000E2 STATUS_OPLOCK_NOT_GRANTED	An error status returned when the opportunistic lock (oplock) request is denied.
0xC00000E3 STATUS_INVALID_OPLOCK_PROTOCOL	An error status returned when an invalid opportunistic lock (oplock) acknowledgment is received by a file system.
0xC00000E4 STATUS_INTERNAL_DB_CORRUPTION	This error indicates that the requested operation cannot be completed due to a catastrophic media failure or an on-disk data structure corruption.
0xC00000E5 STATUS_INTERNAL_ERROR	An internal error occurred.
0xC00000E6 STATUS_GENERIC_NOT_MAPPED	Indicates generic access types were contained in an access mask which should already be mapped to non-generic access types.
0xC00000E7 STATUS_BAD_DESCRIPTOR_FORMAT	Indicates a security descriptor is not in the necessary format (absolute or self-relative).
0xC00000E8 STATUS_INVALID_USER_BUFFER	An access to a user buffer failed at an expected point in time. This code is defined because the caller does not want to accept STATUS_ACCESS_VIOLATION in its filter.
0xC00000E9 STATUS_UNEXPECTED_IO_ERROR	If an I/O error that is not defined in the standard FsRtl filter is returned, it is converted to the following error, which is guaranteed to be in the filter. In this

Return value/code	Description
	case, information is lost; however, the filter correctly handles the exception.
0xC00000EA STATUS_UNEXPECTED_MM_CREATE_ERR	If an MM error that is not defined in the standard FsRtl filter is returned, it is converted to one of the following errors, which are guaranteed to be in the filter. In this case, information is lost; however, the filter correctly handles the exception.
0xC00000EB STATUS_UNEXPECTED_MM_MAP_ERROR	If an MM error that is not defined in the standard FsRtl filter is returned, it is converted to one of the following errors, which are guaranteed to be in the filter. In this case, information is lost; however, the filter correctly handles the exception.
0xC00000EC STATUS_UNEXPECTED_MM_EXTEND_ERR	If an MM error that is not defined in the standard FsRtl filter is returned, it is converted to one of the following errors, which are guaranteed to be in the filter. In this case, information is lost; however, the filter correctly handles the exception.
0xC00000ED STATUS_NOT_LOGON_PROCESS	The requested action is restricted for use by logon processes only. The calling process has not registered as a logon process.
0xC00000EE STATUS_LOGON_SESSION_EXISTS	An attempt has been made to start a new session manager or LSA logon session by using an ID that is already in use.
0xC00000EF STATUS_INVALID_PARAMETER_1	An invalid parameter was passed to a service or function as the first argument.
0xC00000F0 STATUS_INVALID_PARAMETER_2	An invalid parameter was passed to a service or function as the second argument.
0xC00000F1 STATUS_INVALID_PARAMETER_3	An invalid parameter was passed to a service or function as the third argument.
0xC00000F2 STATUS_INVALID_PARAMETER_4	An invalid parameter was passed to a service or function as the fourth argument.
0xC00000F3 STATUS_INVALID_PARAMETER_5	An invalid parameter was passed to a service or function as the fifth argument.
0xC00000F4 STATUS_INVALID_PARAMETER_6	An invalid parameter was passed to a service or function as the sixth argument.
0xC00000F5 STATUS_INVALID_PARAMETER_7	An invalid parameter was passed to a service or function as the seventh argument.
0xC00000F6 STATUS_INVALID_PARAMETER_8	An invalid parameter was passed to a service or function as the eighth argument.
0xC00000F7	An invalid parameter was passed to a

<b>Return value/code</b>	<b>Description</b>
STATUS_INVALID_PARAMETER_9	service or function as the ninth argument.
0xC00000F8 STATUS_INVALID_PARAMETER_10	An invalid parameter was passed to a service or function as the tenth argument.
0xC00000F9 STATUS_INVALID_PARAMETER_11	An invalid parameter was passed to a service or function as the eleventh argument.
0xC00000FA STATUS_INVALID_PARAMETER_12	An invalid parameter was passed to a service or function as the twelfth argument.
0xC00000FB STATUS_REDIRECTOR_NOT_STARTED	An attempt was made to access a network file, but the network software was not yet started.
0xC00000FC STATUS_REDIRECTOR_STARTED	An attempt was made to start the redirector, but the redirector has already been started.
0xC00000FD STATUS_STACK_OVERFLOW	A new guard page for the stack cannot be created.
0xC00000FE STATUS_NO_SUCH_PACKAGE	A specified authentication package is unknown.
0xC00000FF STATUS_BAD_FUNCTION_TABLE	A malformed function table was encountered during an unwind operation.
0xC0000100 STATUS_VARIABLE_NOT_FOUND	Indicates the specified environment variable name was not found in the specified environment block.
0xC0000101 STATUS_DIRECTORY_NOT_EMPTY	Indicates that the directory trying to be deleted is not empty.
0xC0000102 STATUS_FILE_CORRUPT_ERROR	{Corrupt File} The file or directory %hs is corrupt and unreadable. Run the Chkdsk utility.
0xC0000103 STATUS_NOT_A_DIRECTORY	A requested opened file is not a directory.
0xC0000104 STATUS_BAD_LOGON_SESSION_STATE	The logon session is not in a state that is consistent with the requested operation.
0xC0000105 STATUS_LOGON_SESSION_COLLISION	An internal LSA error has occurred. An authentication package has requested the creation of a logon session but the ID of an already existing logon session has been specified.
0xC0000106 STATUS_NAME_TOO_LONG	A specified name string is too long for its intended use.
0xC0000107 STATUS_FILES_OPEN	The user attempted to force close the files on a redirected drive, but there were opened files on the drive, and the user

Return value/code	Description
	did not specify a sufficient level of force.
0xC0000108 STATUS_CONNECTION_IN_USE	The user attempted to force close the files on a redirected drive, but there were opened directories on the drive, and the user did not specify a sufficient level of force.
0xC0000109 STATUS_MESSAGE_NOT_FOUND	RtlFindMessage could not locate the requested message ID in the message table resource.
0xC000010A STATUS_PROCESS_IS_TERMINATING	An attempt was made to duplicate an object handle into or out of an exiting process.
0xC000010B STATUS_INVALID_LOGON_TYPE	Indicates an invalid value has been provided for the LogonType requested.
0xC000010C STATUS_NO_GUID_TRANSLATION	Indicates that an attempt was made to assign protection to a file system file or directory and one of the SIDs in the security descriptor could not be translated into a GUID that could be stored by the file system. This causes the protection attempt to fail, which <del>may</del> might cause a file creation attempt to fail.
0xC000010D STATUS_CANNOT_IMPERSONATE	Indicates that an attempt has been made to impersonate via a named pipe that has not yet been read from.
0xC000010E STATUS_IMAGE_ALREADY_LOADED	Indicates that the specified image is already loaded.
0xC0000117 STATUS_NO_LDT	Indicates that an attempt was made to change the size of the LDT for a process that has no LDT.
0xC0000118 STATUS_INVALID_LDT_SIZE	Indicates that an attempt was made to grow an LDT by setting its size, or that the size was not an even number of selectors.
0xC0000119 STATUS_INVALID_LDT_OFFSET	Indicates that the starting value for the LDT information was not an integral multiple of the selector size.
0xC000011A STATUS_INVALID_LDT_DESCRIPTOR	Indicates that the user supplied an invalid descriptor when trying to set up LDT descriptors.
0xC000011B STATUS_INVALID_IMAGE_NE_FORMAT	The specified image file did not have the correct format. It appears to be NE format.
0xC000011C STATUS_RXACT_INVALID_STATE	Indicates that the transaction state of a registry subtree is incompatible with the requested operation. For example, a request has been made to start a new transaction with one already in progress,

Return value/code	Description
	or a request has been made to apply a transaction when one is not currently in progress.
0xC000011D STATUS_RXACT_COMMIT_FAILURE	Indicates an error has occurred during a registry transaction commit. The database has been left in an unknown, but probably inconsistent, state. The state of the registry transaction is left as COMMITTING.
0xC000011E STATUS_MAPPED_FILE_SIZE_ZERO	An attempt was made to map a file of size zero with the maximum size specified as zero.
0xC000011F STATUS_TOO_MANY_OPENED_FILES	Too many files are opened on a remote server. This error should only be returned by the Windows redirector on a remote drive.
0xC0000120 STATUS_CANCELLED	The I/O request was canceled.
0xC0000121 STATUS_CANNOT_DELETE	An attempt has been made to remove a file or directory that cannot be deleted.
0xC0000122 STATUS_INVALID_COMPUTER_NAME	Indicates a name that was specified as a remote computer name is syntactically invalid.
0xC0000123 STATUS_FILE_DELETED	An I/O request other than close was performed on a file after it was deleted, which can only happen to a request that did not complete before the last handle was closed via NtClose.
0xC0000124 STATUS_SPECIAL_ACCOUNT	Indicates an operation that is incompatible with built-in accounts has been attempted on a built-in (special) SAM account. For example, built-in accounts cannot be deleted.
0xC0000125 STATUS_SPECIAL_GROUP	The operation requested <del>may not</del> cannot be performed on the specified group because it is a built-in special group.
0xC0000126 STATUS_SPECIAL_USER	The operation requested <del>may not</del> cannot be performed on the specified user because it is a built-in special user.
0xC0000127 STATUS_MEMBERS_PRIMARY_GROUP	Indicates a member cannot be removed from a group because the group is currently the member's primary group.
0xC0000128 STATUS_FILE_CLOSED	An I/O request other than close and several other special case operations was attempted using a file object that had already been closed.
0xC0000129 STATUS_TOO_MANY_THREADS	Indicates a process has too many threads to perform the requested action. For example, assignment of a primary token

Return value/code	Description
	<del>may only</del> can be performed <del>only</del> when a process has zero or one threads.
0xC000012A STATUS_THREAD_NOT_IN_PROCESS	An attempt was made to operate on a thread within a specific process, but the specified thread is not in the specified process.
0xC000012B STATUS_TOKEN_ALREADY_IN_USE	An attempt was made to establish a token for use as a primary token but the token is already in use. A token can only be the primary token of one process at a time.
0xC000012C STATUS_PAGEFILE_QUOTA_EXCEEDED	The page file quota was exceeded.
0xC000012D STATUS_COMMITMENT_LIMIT	{Out of Virtual Memory} Your system is low on virtual memory. To ensure that Windows runs correctly, increase the size of your virtual memory paging file. For more information, see Help.
0xC000012E STATUS_INVALID_IMAGE_LE_FORMAT	The specified image file did not have the correct format: it appears to be LE format.
0xC000012F STATUS_INVALID_IMAGE_NOT_MZ	The specified image file did not have the correct format: it did not have an initial MZ.
0xC0000130 STATUS_INVALID_IMAGE_PROTECT	The specified image file did not have the correct format: it did not have a proper e_lfarlc in the MZ header.
0xC0000131 STATUS_INVALID_IMAGE_WIN_16	The specified image file did not have the correct format: it appears to be a 16-bit Windows image.
0xC0000132 STATUS_LOGON_SERVER_CONFLICT	The Netlogon service cannot start because another Netlogon service running in the domain conflicts with the specified role.
0xC0000133 STATUS_TIME_DIFFERENCE_AT_DC	The time at the primary domain controller is different from the time at the backup domain controller or member server by too large an amount.
0xC0000134 STATUS_SYNCHRONIZATION_REQUIRED	The SAM database on a Windows Server is significantly out of synchronization with the copy on the domain controller. A complete synchronization is required.
0xC0000135 STATUS_DLL_NOT_FOUND	{Unable To Locate Component} This application has failed to start because %hs was not found. Reinstalling the application <del>may</del> might fix this problem.
0xC0000136 STATUS_OPEN_FAILED	The NtCreateFile API failed. This error should never be returned to an application; it is a place holder for the Windows LAN Manager Redirector to use

Return value/code	Description
	in its internal error-mapping routines.
0xC0000137 STATUS_IO_PRIVILEGE_FAILED	{Privilege Failed} The I/O permissions for the process could not be changed.
0xC0000138 STATUS_ORDINAL_NOT_FOUND	{Ordinal Not Found} The ordinal %ld could not be located in the dynamic link library %hs.
0xC0000139 STATUS_ENTRYPOINT_NOT_FOUND	{Entry Point Not Found} The procedure entry point %hs could not be located in the dynamic link library %hs.
0xC000013A STATUS_CONTROL_C_EXIT	{Application Exit by CTRL+C} The application terminated as a result of a CTRL+C.
0xC000013B STATUS_LOCAL_DISCONNECT	{Virtual Circuit Closed} The network transport on your computer has closed a network connection. There <b>may</b> or <b>might</b> not be I/O requests outstanding.
0xC000013C STATUS_REMOTE_DISCONNECT	{Virtual Circuit Closed} The network transport on a remote computer has closed a network connection. There <b>may</b> or <b>might</b> not be I/O requests outstanding.
0xC000013D STATUS_REMOTE_RESOURCES	{Insufficient Resources on Remote Computer} The remote computer has insufficient resources to complete the network request. For example, the remote computer <b>may</b> not have enough available memory to carry out the request at this time.
0xC000013E STATUS_LINK_FAILED	{Virtual Circuit Closed} An existing connection (virtual circuit) has been broken at the remote computer. There is probably something wrong with the network software protocol or the network hardware on the remote computer.
0xC000013F STATUS_LINK_TIMEOUT	{Virtual Circuit Closed} The network transport on your computer has closed a network connection because it had to wait too long for a response from the remote computer.
0xC0000140 STATUS_INVALID_CONNECTION	The connection handle that was given to the transport was invalid.
0xC0000141 STATUS_INVALID_ADDRESS	The address handle that was given to the transport was invalid.
0xC0000142 STATUS_DLL_INIT_FAILED	{DLL Initialization Failed} Initialization of the dynamic link library %hs failed. The process is terminating abnormally.
0xC0000143 STATUS_MISSING_SYSTEMFILE	{Missing System File} The required system file %hs is bad or missing.

<b>Return value/code</b>	<b>Description</b>
0xC0000144 STATUS_UNHANDLED_EXCEPTION	{Application Error} The exception %s (0x%08lx) occurred in the application at location 0x%08lx.
0xC0000145 STATUS_APP_INIT_FAILURE	{Application Error} The application failed to initialize properly (0x%lx). Click OK to terminate the application.
0xC0000146 STATUS_PAGEFILE_CREATE_FAILED	{Unable to Create Paging File} The creation of the paging file %hs failed (%lx). The requested size was %ld.
0xC0000147 STATUS_NO_PAGEFILE	{No Paging File Specified} No paging file was specified in the system configuration.
0xC0000148 STATUS_INVALID_LEVEL	{Incorrect System Call Level} An invalid level was passed into the specified system call.
0xC0000149 STATUS_WRONG_PASSWORD_CORE	{Incorrect Password to LAN Manager Server} You specified an incorrect password to a LAN Manager 2.x or MS-NET server.
0xC000014A STATUS_ILLEGAL_FLOAT_CONTEXT	{EXCEPTION} A real-mode application issued a floating-point instruction and floating-point hardware is not present.
0xC000014B STATUS_PIPE_BROKEN	The pipe operation has failed because the other end of the pipe has been closed.
0xC000014C STATUS_REGISTRY_CORRUPT	{The Registry Is Corrupt} The structure of one of the files that contains registry data is corrupt; the image of the file in memory is corrupt; or the file could not be recovered because the alternate copy or log was absent or corrupt.
0xC000014D STATUS_REGISTRY_IO_FAILED	An I/O operation initiated by the Registry failed and cannot be recovered. The registry could not read in, write out, or flush one of the files that contain the system's image of the registry.
0xC000014E STATUS_NO_EVENT_PAIR	An event pair synchronization operation was performed using the thread-specific client/server event pair object, but no event pair object was associated with the thread.
0xC000014F STATUS_UNRECOGNIZED_VOLUME	The volume does not contain a recognized file system. Be sure that all required file system drivers are loaded and that the volume is not corrupt.
0xC0000150 STATUS_SERIAL_NO_DEVICE_INITED	No serial device was successfully initialized. The serial driver will unload.
0xC0000151 STATUS_NO_SUCH_ALIAS	The specified local group does not exist.

Return value/code	Description
0xC0000152 STATUS_MEMBER_NOT_IN_ALIAS	The specified account name is not a member of the group.
0xC0000153 STATUS_MEMBER_IN_ALIAS	The specified account name is already a member of the group.
0xC0000154 STATUS_ALIAS_EXISTS	The specified local group already exists.
0xC0000155 STATUS_LOGON_NOT_GRANTED	A requested type of logon (for example, interactive, network, and service) is not granted by the local security policy of the target system. Ask the system administrator to grant the necessary form of logon.
0xC0000156 STATUS_TOO_MANY_SECRETS	The maximum number of secrets that <b>maycan</b> be stored in a single system was exceeded. The length and number of secrets is limited to satisfy U.S. State Department export restrictions.
0xC0000157 STATUS_SECRET_TOO_LONG	The length of a secret exceeds the maximum allowable length. The length and number of secrets is limited to satisfy U.S. State Department export restrictions.
0xC0000158 STATUS_INTERNAL_DB_ERROR	The local security authority (LSA) database contains an internal inconsistency.
0xC0000159 STATUS_FULLSCREEN_MODE	The requested operation cannot be performed in full-screen mode.
0xC000015A STATUS_TOO_MANY_CONTEXT_IDS	During a logon attempt, the user's security context accumulated too many security IDs. This is a very unusual situation. Remove the user from some global or local groups to reduce the number of security IDs to incorporate into the security context.
0xC000015B STATUS_LOGON_TYPE_NOT_GRANTED	A user has requested a type of logon (for example, interactive or network) that has not been granted. An administrator has control over who <b>maycan</b> logon interactively and through the network.
0xC000015C STATUS_NOT_REGISTRY_FILE	The system has attempted to load or restore a file into the registry, and the specified file is not in the format of a registry file.
0xC000015D STATUS_NT_CROSS_ENCRYPTION_REQUIRED	An attempt was made to change a user password in the security account manager without providing the necessary Windows cross-encrypted password.
0xC000015E STATUS_DOMAIN_CTRLR_CONFIG_ERROR	A Windows Server has an incorrect configuration.

<b>Return value/code</b>	<b>Description</b>
0xC000015F STATUS_FT_MISSING_MEMBER	An attempt was made to explicitly access the secondary copy of information via a device control to the fault tolerance driver and the secondary copy is not present in the system.
0xC0000160 STATUS_ILL_FORMED_SERVICE_ENTRY	A configuration registry node that represents a driver service entry was ill-formed and did not contain the required value entries.
0xC0000161 STATUS_ILLEGAL_CHARACTER	An illegal character was encountered. For a multibyte character set, this includes a lead byte without a succeeding trail byte. For the Unicode character set this includes the characters 0xFFFF and 0xFFFE.
0xC0000162 STATUS_UNMAPPABLE_CHARACTER	No mapping for the Unicode character exists in the target multibyte code page.
0xC0000163 STATUS_UNDEFINED_CHARACTER	The Unicode character is not defined in the Unicode character set that is installed on the system.
0xC0000164 STATUS_FLOPPY_VOLUME	The paging file cannot be created on a floppy disk.
0xC0000165 STATUS_FLOPPY_ID_MARK_NOT_FOUND	{Floppy Disk Error} While accessing a floppy disk, an ID address mark was not found.
0xC0000166 STATUS_FLOPPY_WRONG_CYLINDER	{Floppy Disk Error} While accessing a floppy disk, the track address from the sector ID field was found to be different from the track address that is maintained by the controller.
0xC0000167 STATUS_FLOPPY_UNKNOWN_ERROR	{Floppy Disk Error} The floppy disk controller reported an error that is not recognized by the floppy disk driver.
0xC0000168 STATUS_FLOPPY_BAD_REGISTERS	{Floppy Disk Error} While accessing a floppy-disk, the controller returned inconsistent results via its registers.
0xC0000169 STATUS_DISK_RECALIBRATE_FAILED	{Hard Disk Error} While accessing the hard disk, a recalibrate operation failed, even after retries.
0xC000016A STATUS_DISK_OPERATION_FAILED	{Hard Disk Error} While accessing the hard disk, a disk operation failed even after retries.
0xC000016B STATUS_DISK_RESET_FAILED	{Hard Disk Error} While accessing the hard disk, a disk controller reset was needed, but even that failed.
0xC000016C STATUS_SHARED_IRQ_BUSY	An attempt was made to open a device that was sharing an interrupt request (IRQ) with other devices. At least one other device that uses that IRQ was

Return value/code	Description
	already opened. Two concurrent opens of devices that share an IRQ and only work via interrupts is not supported for the particular bus type that the devices use.
0xC000016D STATUS_FT_ORPHANING	{FT Orphaning} A disk that is part of a fault-tolerant volume can no longer be accessed.
0xC000016E STATUS_BIOS_FAILED_TO_CONNECT_INTERRUPT	The basic input/output system (BIOS) failed to connect a system interrupt to the device or bus for which the device is connected.
0xC0000172 STATUS_PARTITION_FAILURE	The tape could not be partitioned.
0xC0000173 STATUS_INVALID_BLOCK_LENGTH	When accessing a new tape of a multi-volume partition, the current blocksize is incorrect.
0xC0000174 STATUS_DEVICE_NOT_PARTITIONED	The tape partition information could not be found when loading a tape.
0xC0000175 STATUS_UNABLE_TO_LOCK_MEDIA	An attempt to lock the eject media mechanism failed.
0xC0000176 STATUS_UNABLE_TO_UNLOAD_MEDIA	An attempt to unload media failed.
0xC0000177 STATUS_EOM_OVERFLOW	The physical end of tape was detected.
0xC0000178 STATUS_NO_MEDIA	{No Media} There is no media in the drive. Insert media into drive %hs.
0xC000017A STATUS_NO_SUCH_MEMBER	A member could not be added to or removed from the local group because the member does not exist.
0xC000017B STATUS_INVALID_MEMBER	A new member could not be added to a local group because the member has the wrong account type.
0xC000017C STATUS_KEY_DELETED	An illegal operation was attempted on a registry key that has been marked for deletion.
0xC000017D STATUS_NO_LOG_SPACE	The system could not allocate the required space in a registry log.
0xC000017E STATUS_TOO_MANY_SIDS	Too many SIDs have been specified.
0xC000017F STATUS_LM_CROSS_ENCRYPTION_REQUIRED	An attempt was made to change a user password in the security account manager without providing the necessary LM cross-encrypted password.
0xC0000180	An attempt was made to create a symbolic link in a registry key that

Return value/code	Description
STATUS_KEY_HAS_CHILDREN	already has subkeys or values.
0xC0000181 STATUS_CHILD_MUST_BE_VOLATILE	An attempt was made to create a stable subkey under a volatile parent key.
0xC0000182 STATUS_DEVICE_CONFIGURATION_ERROR	The I/O device is configured incorrectly or the configuration parameters to the driver are incorrect.
0xC0000183 STATUS_DRIVER_INTERNAL_ERROR	An error was detected between two drivers or within an I/O driver.
0xC0000184 STATUS_INVALID_DEVICE_STATE	The device is not in a valid state to perform this request.
0xC0000185 STATUS_IO_DEVICE_ERROR	The I/O device reported an I/O error.
0xC0000186 STATUS_DEVICE_PROTOCOL_ERROR	A protocol error was detected between the driver and the device.
0xC0000187 STATUS_BACKUP_CONTROLLER	This operation is only allowed for the primary domain controller of the domain.
0xC0000188 STATUS_LOG_FILE_FULL	The log file space is insufficient to support this operation.
0xC0000189 STATUS_TOO_LATE	A write operation was attempted to a volume after it was dismounted.
0xC000018A STATUS_NO_TRUST_LSA_SECRET	The workstation does not have a trust secret for the primary domain in the local LSA database.
0xC000018B STATUS_NO_TRUST_SAM_ACCOUNT	The SAM database on the Windows Server does not have a computer account for this workstation trust relationship.
0xC000018C STATUS_TRUSTED_DOMAIN_FAILURE	The logon request failed because the trust relationship between the primary domain and the trusted domain failed.
0xC000018D STATUS_TRUSTED_RELATIONSHIP_FAILURE	The logon request failed because the trust relationship between this workstation and the primary domain failed.
0xC000018E STATUS_EVENTLOG_FILE_CORRUPT	The Eventlog log file is corrupt.
0xC000018F STATUS_EVENTLOG_CANT_START	No Eventlog log file could be opened. The Eventlog service did not start.
0xC0000190 STATUS_TRUST_FAILURE	The network logon failed. This <b>may</b> be because the validation authority cannot be reached.
0xC0000191 STATUS_MUTANT_LIMIT_EXCEEDED	An attempt was made to acquire a mutant such that its maximum count would have been exceeded.

Return value/code	Description
0xC0000192 STATUS_NETLOGON_NOT_STARTED	An attempt was made to logon, but the NetLogon service was not started.
0xC0000193 STATUS_ACCOUNT_EXPIRED	The user account has expired.
0xC0000194 STATUS_POSSIBLE_DEADLOCK	{EXCEPTION} Possible deadlock condition.
0xC0000195 STATUS_NETWORK_CREDENTIAL_CONFLICT	Multiple connections to a server or shared resource by the same user, using more than one user name, are not allowed. Disconnect all previous connections to the server or shared resource and try again.
0xC0000196 STATUS_REMOTE_SESSION_LIMIT	An attempt was made to establish a session to a network server, but there are already too many sessions established to that server.
0xC0000197 STATUS_EVENTLOG_FILE_CHANGED	The log file has changed between reads.
0xC0000198 STATUS_NOLOGON_INTERDOMAIN_TRUST_ACCOUNT	The account used is an interdomain trust account. Use your global user account or local user account to access this server.
0xC0000199 STATUS_NOLOGON_WORKSTATION_TRUST_ACCOUNT	The account used is a computer account. Use your global user account or local user account to access this server.
0xC000019A STATUS_NOLOGON_SERVER_TRUST_ACCOUNT	The account used is a server trust account. Use your global user account or local user account to access this server.
0xC000019B STATUS_DOMAIN_TRUST_INCONSISTENT	The name or SID of the specified domain is inconsistent with the trust information for that domain.
0xC000019C STATUS_FS_DRIVER_REQUIRED	A volume has been accessed for which a file system driver is required that has not yet been loaded.
0xC000019D STATUS_IMAGE_ALREADY_LOADED_AS_DLL	Indicates that the specified image is already loaded as a DLL.
0xC000019E STATUS_INCOMPATIBLE_WITH_GLOBAL_SHORT_NAME_REGISTRY_SETTING	Short name settings <del>may not</del> cannot be changed on this volume due to the global registry setting.
0xC000019F STATUS_SHORT_NAMES_NOT_ENABLED_ON_VOLUME	Short names are not enabled on this volume.
0xC00001A0 STATUS_SECURITY_STREAM_IS_INCONSISTENT	The security stream for the given volume is in an inconsistent state. Please run CHKDSK on the volume.
0xC00001A1 STATUS_INVALID_LOCK_RANGE	A requested file lock operation cannot be processed due to an invalid byte range.

<b>Return value/code</b>	<b>Description</b>
0xC00001A2 STATUS_INVALID_ACE_CONDITION	The specified access control entry (ACE) contains an invalid condition.
0xC00001A3 STATUS_IMAGE_SUBSYSTEM_NOT_PRESENT	The subsystem needed to support the image type is not present.
0xC00001A4 STATUS_NOTIFICATION_GUID_ALREADY_DEFINED	The specified file already has a notification GUID associated with it.
0xC0000201 STATUS_NETWORK_OPEN_RESTRICTION	A remote open failed because the network open restrictions were not satisfied.
0xC0000202 STATUS_NO_USER_SESSION_KEY	There is no user session key for the specified logon session.
0xC0000203 STATUS_USER_SESSION_DELETED	The remote user session has been deleted.
0xC0000204 STATUS_RESOURCE_LANG_NOT_FOUND	Indicates the specified resource language ID cannot be found in the image file.
0xC0000205 STATUS_INSUFF_SERVER_RESOURCES	Insufficient server resources exist to complete the request.
0xC0000206 STATUS_INVALID_BUFFER_SIZE	The size of the buffer is invalid for the specified operation.
0xC0000207 STATUS_INVALID_ADDRESS_COMPONENT	The transport rejected the specified network address as invalid.
0xC0000208 STATUS_INVALID_ADDRESS_WILDCARD	The transport rejected the specified network address due to invalid use of a wildcard.
0xC0000209 STATUS_TOO_MANY_ADDRESSES	The transport address could not be opened because all the available addresses are in use.
0xC000020A STATUS_ADDRESS_ALREADY_EXISTS	The transport address could not be opened because it already exists.
0xC000020B STATUS_ADDRESS_CLOSED	The transport address is now closed.
0xC000020C STATUS_CONNECTION_DISCONNECTED	The transport connection is now disconnected.
0xC000020D STATUS_CONNECTION_RESET	The transport connection has been reset.
0xC000020E STATUS_TOO_MANY_NODES	The transport cannot dynamically acquire any more nodes.
0xC000020F STATUS_TRANSACTION_ABORTED	The transport aborted a pending transaction.
0xC0000210	The transport timed out a request that is

Return value/code	Description
STATUS_TRANSACTION_TIMED_OUT	waiting for a response.
0xC0000211 STATUS_TRANSACTION_NO_RELEASE	The transport did not receive a release for a pending response.
0xC0000212 STATUS_TRANSACTION_NO_MATCH	The transport did not find a transaction that matches the specific token.
0xC0000213 STATUS_TRANSACTION_RESPONDED	The transport had previously responded to a transaction request.
0xC0000214 STATUS_TRANSACTION_INVALID_ID	The transport does not recognize the specified transaction request ID.
0xC0000215 STATUS_TRANSACTION_INVALID_TYPE	The transport does not recognize the specified transaction request type.
0xC0000216 STATUS_NOT_SERVER_SESSION	The transport can only process the specified request on the server side of a session.
0xC0000217 STATUS_NOT_CLIENT_SESSION	The transport can only process the specified request on the client side of a session.
0xC0000218 STATUS_CANNOT_LOAD_REGISTRY_FILE	{Registry File Failure} The registry cannot load the hive (file): %hs or its log or alternate. It is corrupt, absent, or not writable.
0xC0000219 STATUS_DEBUG_ATTACH_FAILED	{Unexpected Failure in DebugActiveProcess} An unexpected failure occurred while processing a DebugActiveProcess API request. <del>You may choose</del> Choosing OK <del>to</del> will terminate the process, <del>or</del> and choosing Cancel <del>to</del> will ignore the error.
0xC000021A STATUS_SYSTEM_PROCESS_TERMINATED	{Fatal System Error} The %hs system process terminated unexpectedly with a status of 0x%08x (0x%08x 0x%08x). The system has been shut down.
0xC000021B STATUS_DATA_NOT_ACCEPTED	{Data Not Accepted} The TDI client could not handle the data received during an indication.
0xC000021C STATUS_NO_BROWSER_SERVERS_FOUND	{Unable to Retrieve Browser Server List} The list of servers for this workgroup is not currently available.
0xC000021D STATUS_VDM_HARD_ERROR	NTVDM encountered a hard error.
0xC000021E STATUS_DRIVER_CANCEL_TIMEOUT	{Cancel Timeout} The driver %hs failed to complete a canceled I/O request in the allotted time.
0xC000021F STATUS_REPLY_MESSAGE_MISMATCH	{Reply Message Mismatch} An attempt was made to reply to an LPC message, but the thread specified by the client ID

Return value/code	Description
	in the message was not waiting on that message.
0xC0000220 STATUS_MAPPED_ALIGNMENT	{Mapped View Alignment Incorrect} An attempt was made to map a view of a file, but either the specified base address or the offset into the file were not aligned on the proper allocation granularity.
0xC0000221 STATUS_IMAGE_CHECKSUM_MISMATCH	{Bad Image Checksum} The image %hs is possibly corrupt. The header checksum does not match the computed checksum.
0xC0000222 STATUS_LOST_WRITEBEHIND_DATA	{Delayed Write Failed} Windows was unable to save all the data for the file %hs. The data has been lost. This error <b>may</b> be caused by a failure of your computer hardware or network connection. Try to save this file elsewhere.
0xC0000223 STATUS_CLIENT_SERVER_PARAMETERS_INVALID	The parameters passed to the server in the client/server shared memory window were invalid. Too much data <b>may</b> have been put in the shared memory window.
0xC0000224 STATUS_PASSWORD_MUST_CHANGE	The user password must be changed before logging on the first time.
0xC0000225 STATUS_NOT_FOUND	The object was not found.
0xC0000226 STATUS_NOT_TINY_STREAM	The stream is not a tiny stream.
0xC0000227 STATUS_RECOVERY_FAILURE	A transaction recovery failed.
0xC0000228 STATUS_STACK_OVERFLOW_READ	The request must be handled by the stack overflow code.
0xC0000229 STATUS_FAIL_CHECK	A consistency check failed.
0xC000022A STATUS_DUPLICATE_OBJECTID	The attempt to insert the ID in the index failed because the ID is already in the index.
0xC000022B STATUS_OBJECTID_EXISTS	The attempt to set the object ID failed because the object already has an ID.
0xC000022C STATUS_CONVERT_TO_LARGE	Internal OFS status codes indicating how an allocation operation is handled. Either it is retried after the containing oNode is moved or the extent stream is converted to a large stream.
0xC000022D STATUS_RETRY	The request needs to be retried.

<b>Return value/code</b>	<b>Description</b>
0xC000022E STATUS_FOUND_OUT_OF_SCOPE	The attempt to find the object found an object on the volume that matches by ID; however, it is out of the scope of the handle that is used for the operation.
0xC000022F STATUS_ALLOCATE_BUCKET	The bucket array must be grown. Retry the transaction after doing so.
0xC0000230 STATUS_PROPSET_NOT_FOUND	The specified property set does not exist on the object.
0xC0000231 STATUS_MARSHALL_OVERFLOW	The user/kernel marshaling buffer has overflowed.
0xC0000232 STATUS_INVALID_VARIANT	The supplied variant structure contains invalid data.
0xC0000233 STATUS_DOMAIN_CONTROLLER_NOT_FOUND	A domain controller for this domain was not found.
0xC0000234 STATUS_ACCOUNT_LOCKED_OUT	The user account has been automatically locked because too many invalid logon attempts or password change attempts have been requested.
0xC0000235 STATUS_HANDLE_NOT_CLOSABLE	NtClose was called on a handle that was protected from close via NtSetInformationObject.
0xC0000236 STATUS_CONNECTION_REFUSED	The transport-connection attempt was refused by the remote system.
0xC0000237 STATUS_GRACEFUL_DISCONNECT	The transport connection was gracefully closed.
0xC0000238 STATUS_ADDRESS_ALREADY_ASSOCIATED	The transport endpoint already has an address associated with it.
0xC0000239 STATUS_ADDRESS_NOT_ASSOCIATED	An address has not yet been associated with the transport endpoint.
0xC000023A STATUS_CONNECTION_INVALID	An operation was attempted on a nonexistent transport connection.
0xC000023B STATUS_CONNECTION_ACTIVE	An invalid operation was attempted on an active transport connection.
0xC000023C STATUS_NETWORK_UNREACHABLE	The remote network is not reachable by the transport.
0xC000023D STATUS_HOST_UNREACHABLE	The remote system is not reachable by the transport.
0xC000023E STATUS_PROTOCOL_UNREACHABLE	The remote system does not support the transport protocol.
0xC000023F STATUS_PORT_UNREACHABLE	No service is operating at the destination port of the transport on the remote

Return value/code	Description
	system.
0xC0000240 STATUS_REQUEST_ABORTED	The request was aborted.
0xC0000241 STATUS_CONNECTION_ABORTED	The transport connection was aborted by the local system.
0xC0000242 STATUS_BAD_COMPRESSION_BUFFER	The specified buffer contains ill-formed data.
0xC0000243 STATUS_USER_MAPPED_FILE	The requested operation cannot be performed on a file with a user mapped section open.
0xC0000244 STATUS_AUDIT_FAILED	{Audit Failed} An attempt to generate a security audit failed.
0xC0000245 STATUS_TIMER_RESOLUTION_NOT_SET	The timer resolution was not previously set by the current process.
0xC0000246 STATUS_CONNECTION_COUNT_LIMIT	A connection to the server could not be made because the limit on the number of concurrent connections for this account has been reached.
0xC0000247 STATUS_LOGIN_TIME_RESTRICTION	Attempting to log on during an unauthorized time of day for this account.
0xC0000248 STATUS_LOGIN_WKSTA_RESTRICTION	The account is not authorized to log on from this station.
0xC0000249 STATUS_IMAGE_MP_UP_MISMATCH	{UP/MP Image Mismatch} The image %hs has been modified for use on a uniprocessor system, but you are running it on a multiprocessor machine. Reinstall the image file.
0xC0000250 STATUS_INSUFFICIENT_LOGON_INFO	There is insufficient account information to log you on.
0xC0000251 STATUS_BAD_DLL_ENTRYPOINT	{Invalid DLL Entrypoint} The dynamic link library %hs is not written correctly. The stack pointer has been left in an inconsistent state. The entry point should be declared as WINAPI or STDCALL. Select YES to fail the DLL load. Select NO to continue execution. Selecting NO <b>may</b> cause the application to operate incorrectly.
0xC0000252 STATUS_BAD_SERVICE_ENTRYPOINT	{Invalid Service Callback Entrypoint} The %hs service is not written correctly. The stack pointer has been left in an inconsistent state. The callback entry point should be declared as WINAPI or STDCALL. Selecting OK will cause the service to continue operation. However, the service process <b>may</b> operate incorrectly.

<b>Return value/code</b>	<b>Description</b>
0xC0000253 STATUS_LPC_REPLY_LOST	The server received the messages but did not send a reply.
0xC0000254 STATUS_IP_ADDRESS_CONFLICT1	There is an IP address conflict with another system on the network.
0xC0000255 STATUS_IP_ADDRESS_CONFLICT2	There is an IP address conflict with another system on the network.
0xC0000256 STATUS_REGISTRY_QUOTA_LIMIT	{Low On Registry Space} The system has reached the maximum size that is allowed for the system part of the registry. Additional storage requests will be ignored.
0xC0000257 STATUS_PATH_NOT_COVERED	The contacted server does not support the indicated part of the DFS namespace.
0xC0000258 STATUS_NO_CALLBACK_ACTIVE	A callback return system service cannot be executed when no callback is active.
0xC0000259 STATUS_LICENSE_QUOTA_EXCEEDED	The service being accessed is licensed for a particular number of connections. No more connections can be made to the service at this time because the service has already accepted the maximum number of connections.
0xC000025A STATUS_PWD_TOO_SHORT	The password provided is too short to meet the policy of your user account. Choose a longer password.
0xC000025B STATUS_PWD_TOO_RECENT	The policy of your user account does not allow you to change passwords too frequently. This is done to prevent users from changing back to a familiar, but potentially discovered, password. If you feel your password has been compromised, contact your administrator immediately to have a new one assigned.
0xC000025C STATUS_PWD_HISTORY_CONFLICT	You have attempted to change your password to one that you have used in the past. The policy of your user account does not allow this. Select a password that you have not previously used.
0xC000025E STATUS_PLUGPLAY_NO_DEVICE	You have attempted to load a legacy device driver while its device instance had been disabled.
0xC000025F STATUS_UNSUPPORTED_COMPRESSION	The specified compression format is unsupported.
0xC0000260 STATUS_INVALID_HW_PROFILE	The specified hardware profile configuration is invalid.
0xC0000261 STATUS_INVALID_PLUGPLAY_DEVICE_PATH	The specified Plug and Play registry device path is invalid.

<b>Return value/code</b>	<b>Description</b>
0xC0000262 STATUS_DRIVER_ORDINAL_NOT_FOUND	{Driver Entry Point Not Found} The %hs device driver could not locate the ordinal %ld in driver %hs.
0xC0000263 STATUS_DRIVER_ENTRYPOINT_NOT_FOUND	{Driver Entry Point Not Found} The %hs device driver could not locate the entry point %hs in driver %hs.
0xC0000264 STATUS_RESOURCE_NOT_OWNED	{Application Error} The application attempted to release a resource it did not own. Click OK to terminate the application.
0xC0000265 STATUS_TOO_MANY_LINKS	An attempt was made to create more links on a file than the file system supports.
0xC0000266 STATUS_QUOTA_LIST_INCONSISTENT	The specified quota list is internally inconsistent with its descriptor.
0xC0000267 STATUS_FILE_IS_OFFLINE	The specified file has been relocated to offline storage.
0xC0000268 STATUS_EVALUATION_EXPIRATION	{Windows Evaluation Notification} The evaluation period for this installation of Windows has expired. This system will shutdown in 1 hour. To restore access to this installation of Windows, upgrade this installation by using a licensed distribution of this product.
0xC0000269 STATUS_ILLEGAL_DLL_RELOCATION	{Illegal System DLL Relocation} The system DLL %hs was relocated in memory. The application will not run properly. The relocation occurred because the DLL %hs occupied an address range that is reserved for Windows system DLLs. The vendor supplying the DLL should be contacted for a new DLL.
0xC000026A STATUS_LICENSE_VIOLATION	{License Violation} The system has detected tampering with your registered product type. This is a violation of your software license. Tampering with the product type is not permitted.
0xC000026B STATUS_DLL_INIT_FAILED_LOGOFF	{DLL Initialization Failed} The application failed to initialize because the window station is shutting down.
0xC000026C STATUS_DRIVER_UNABLE_TO_LOAD	{Unable to Load Device Driver} %hs device driver could not be loaded. Error Status was 0x%x.
0xC000026D STATUS_DFS_UNAVAILABLE	DFS is unavailable on the contacted server.
0xC000026E STATUS_VOLUME_DISMOUNTED	An operation was attempted to a volume after it was dismounted.
0xC000026F	An internal error occurred in the Win32

<b>Return value/code</b>	<b>Description</b>
STATUS_WX86_INTERNAL_ERROR	x86 emulation subsystem.
0xC0000270 STATUS_WX86_FLOAT_STACK_CHECK	Win32 x86 emulation subsystem floating-point stack check.
0xC0000271 STATUS_VALIDATE_CONTINUE	The validation process needs to continue on to the next step.
0xC0000272 STATUS_NO_MATCH	There was no match for the specified key in the index.
0xC0000273 STATUS_NO_MORE_MATCHES	There are no more matches for the current index enumeration.
0xC0000275 STATUS_NOT_A_REPARSE_POINT	The NTFS file or directory is not a reparse point.
0xC0000276 STATUS_IO_REPARSE_TAG_INVALID	The Windows I/O reparse tag passed for the NTFS reparse point is invalid.
0xC0000277 STATUS_IO_REPARSE_TAG_MISMATCH	The Windows I/O reparse tag does not match the one that is in the NTFS reparse point.
0xC0000278 STATUS_IO_REPARSE_DATA_INVALID	The user data passed for the NTFS reparse point is invalid.
0xC0000279 STATUS_IO_REPARSE_TAG_NOT_HANDLED	The layered file system driver for this I/O tag did not handle it when needed.
0xC0000280 STATUS_REPARSE_POINT_NOT_RESOLVED	The NTFS symbolic link could not be resolved even though the initial file name is valid.
0xC0000281 STATUS_DIRECTORY_IS_A_REPARSE_POINT	The NTFS directory is a reparse point.
0xC0000282 STATUS_RANGE_LIST_CONFLICT	The range could not be added to the range list because of a conflict.
0xC0000283 STATUS_SOURCE_ELEMENT_EMPTY	The specified medium changer source element contains no media.
0xC0000284 STATUS_DESTINATION_ELEMENT_FULL	The specified medium changer destination element already contains media.
0xC0000285 STATUS_ILLEGAL_ELEMENT_ADDRESS	The specified medium changer element does not exist.
0xC0000286 STATUS_MAGAZINE_NOT_PRESENT	The specified element is contained in a magazine that is no longer present.
0xC0000287 STATUS_REINITIALIZATION_NEEDED	The device requires re-initialization due to hardware errors.
0xC000028A STATUS_ENCRYPTION_FAILED	The file encryption attempt failed.

<b>Return value/code</b>	<b>Description</b>
0xC000028B STATUS_DECRYPTION_FAILED	The file decryption attempt failed.
0xC000028C STATUS_RANGE_NOT_FOUND	The specified range could not be found in the range list.
0xC000028D STATUS_NO_RECOVERY_POLICY	There is no encryption recovery policy configured for this system.
0xC000028E STATUS_NO_EFS	The required encryption driver is not loaded for this system.
0xC000028F STATUS_WRONG_EFS	The file was encrypted with a different encryption driver than is currently loaded.
0xC0000290 STATUS_NO_USER_KEYS	There are no EFS keys defined for the user.
0xC0000291 STATUS_FILE_NOT_ENCRYPTED	The specified file is not encrypted.
0xC0000292 STATUS_NOT_EXPORT_FORMAT	The specified file is not in the defined EFS export format.
0xC0000293 STATUS_FILE_ENCRYPTED	The specified file is encrypted and the user does not have the ability to decrypt it.
0xC0000295 STATUS_WMI_GUID_NOT_FOUND	The GUID passed was not recognized as valid by a WMI data provider.
0xC0000296 STATUS_WMI_INSTANCE_NOT_FOUND	The instance name passed was not recognized as valid by a WMI data provider.
0xC0000297 STATUS_WMI_ITEMID_NOT_FOUND	The data item ID passed was not recognized as valid by a WMI data provider.
0xC0000298 STATUS_WMI_TRY_AGAIN	The WMI request could not be completed and should be retried.
0xC0000299 STATUS_SHARED_POLICY	The policy object is shared and can only be modified at the root.
0xC000029A STATUS_POLICY_OBJECT_NOT_FOUND	The policy object does not exist when it should.
0xC000029B STATUS_POLICY_ONLY_IN_DS	The requested policy information only lives in the Ds.
0xC000029C STATUS_VOLUME_NOT_UPGRADED	The volume must be upgraded to enable this feature.
0xC000029D STATUS_REMOTE_STORAGE_NOT_ACTIVE	The remote storage service is not operational at this time.

<b>Return value/code</b>	<b>Description</b>
0xC000029E STATUS_REMOTE_STORAGE_MEDIA_ERROR	The remote storage service encountered a media error.
0xC000029F STATUS_NO_TRACKING_SERVICE	The tracking (workstation) service is not running.
0xC00002A0 STATUS_SERVER_SID_MISMATCH	The server process is running under a SID that is different from the SID that is required by client.
0xC00002A1 STATUS_DS_NO_ATTRIBUTE_OR_VALUE	The specified directory service attribute or value does not exist.
0xC00002A2 STATUS_DS_INVALID_ATTRIBUTE_SYNTAX	The attribute syntax specified to the directory service is invalid.
0xC00002A3 STATUS_DS_ATTRIBUTE_TYPE_UNDEFINED	The attribute type specified to the directory service is not defined.
0xC00002A4 STATUS_DS_ATTRIBUTE_OR_VALUE_EXISTS	The specified directory service attribute or value already exists.
0xC00002A5 STATUS_DS_BUSY	The directory service is busy.
0xC00002A6 STATUS_DS_UNAVAILABLE	The directory service is unavailable.
0xC00002A7 STATUS_DS_NO_RIDS_ALLOCATED	The directory service was unable to allocate a relative identifier.
0xC00002A8 STATUS_DS_NO_MORE_RIDS	The directory service has exhausted the pool of relative identifiers.
0xC00002A9 STATUS_DS_INCORRECT_ROLE_OWNER	The requested operation could not be performed because the directory service is not the master for that type of operation.
0xC00002AA STATUS_DS_RIDMGR_INIT_ERROR	The directory service was unable to initialize the subsystem that allocates relative identifiers.
0xC00002AB STATUS_DS_OBJ_CLASS_VIOLATION	The requested operation did not satisfy one or more constraints that are associated with the class of the object.
0xC00002AC STATUS_DS_CANT_ON_NON_LEAF	The directory service can perform the requested operation only on a leaf object.
0xC00002AD STATUS_DS_CANT_ON_RDN	The directory service cannot perform the requested operation on the Relatively Defined Name (RDN) attribute of an object.
0xC00002AE STATUS_DS_CANT_MOD_OBJ_CLASS	The directory service detected an attempt to modify the object class of an object.
0xC00002AF	An error occurred while performing a

Return value/code	Description
STATUS_DS_CROSS_DOM_MOVE_FAILED	cross domain move operation.
0xC00002B0 STATUS_DS_GC_NOT_AVAILABLE	Unable to contact the global catalog server.
0xC00002B1 STATUS_DIRECTORY_SERVICE_REQUIRED	The requested operation requires a directory service, and none was available.
0xC00002B2 STATUS_REPARSE_ATTRIBUTE_CONFLICT	The reparse attribute cannot be set because it is incompatible with an existing attribute.
0xC00002B3 STATUS_CANT_ENABLE_DENY_ONLY	A group marked "use for deny only" cannot be enabled.
0xC00002B4 STATUS_FLOAT_MULTIPLE_FAULTS	{EXCEPTION} Multiple floating-point faults.
0xC00002B5 STATUS_FLOAT_MULTIPLE_TRAPS	{EXCEPTION} Multiple floating-point traps.
0xC00002B6 STATUS_DEVICE_REMOVED	The device has been removed.
0xC00002B7 STATUS_JOURNAL_DELETE_IN_PROGRESS	The volume change journal is being deleted.
0xC00002B8 STATUS_JOURNAL_NOT_ACTIVE	The volume change journal is not active.
0xC00002B9 STATUS_NOINTERFACE	The requested interface is not supported.
0xC00002C1 STATUS_DS_ADMIN_LIMIT_EXCEEDED	A directory service resource limit has been exceeded.
0xC00002C2 STATUS_DRIVER_FAILED_SLEEP	{System Standby Failed} The driver %hs does not support standby mode. Updating this driver <del>may allow</del> allows the system to go to standby mode.
0xC00002C3 STATUS_MUTUAL_AUTHENTICATION_FAILED	Mutual Authentication failed. The server password is out of date at the domain controller.
0xC00002C4 STATUS_CORRUPT_SYSTEM_FILE	The system file %1 has become corrupt and has been replaced.
0xC00002C5 STATUS_DATATYPE_MISALIGNMENT_ERROR	{EXCEPTION} Alignment Error A data type misalignment error was detected in a load or store instruction.
0xC00002C6 STATUS_WMI_READ_ONLY	The WMI data item or data block is read-only.
0xC00002C7 STATUS_WMI_SET_FAILURE	The WMI data item or data block could not be changed.

Return value/code	Description
0xC00002C8 STATUS_COMMITMENT_MINIMUM	{Virtual Memory Minimum Too Low} Your system is low on virtual memory. Windows is increasing the size of your virtual memory paging file. During this process, memory requests for some applications <b>may</b> be denied. For more information, see Help.
0xC00002C9 STATUS_REG_NAT_CONSUMPTION	{EXCEPTION} Register NaT consumption faults. A NaT value is consumed on a non-speculative instruction.
0xC00002CA STATUS_TRANSPORT_FULL	The transport element of the medium changer contains media, which is causing the operation to fail.
0xC00002CB STATUS_DS_SAM_INIT_FAILURE	Security Accounts Manager initialization failed because of the following error: %hs Error Status: 0x%x. Click OK to shut down this system and restart in Directory Services Restore Mode. Check the event log for more detailed information.
0xC00002CC STATUS_ONLY_IF_CONNECTED	This operation is supported only when you are connected to the server.
0xC00002CD STATUS_DS_SENSITIVE_GROUP_VIOLATION	Only an administrator can modify the membership list of an administrative group.
0xC00002CE STATUS_PNP_RESTART_ENUMERATION	A device was removed so enumeration must be restarted.
0xC00002CF STATUS_JOURNAL_ENTRY_DELETED	The journal entry has been deleted from the journal.
0xC00002D0 STATUS_DS_CANT_MOD_PRIMARYGROUPID	Cannot change the primary group ID of a domain controller account.
0xC00002D1 STATUS_SYSTEM_IMAGE_BAD_SIGNATURE	{Fatal System Error} The system image %s is not properly signed. The file has been replaced with the signed file. The system has been shut down.
0xC00002D2 STATUS_PNP_REBOOT_REQUIRED	The device will not start without a reboot.
0xC00002D3 STATUS_POWER_STATE_INVALID	The power state of the current device cannot support this request.
0xC00002D4 STATUS_DS_INVALID_GROUP_TYPE	The specified group type is invalid.
0xC00002D5 STATUS_DS_NO_NEST_GLOBALGROUP_IN_MIXEDDOMAIN	In a mixed domain, no nesting of a global group if the group is security enabled.
0xC00002D6 STATUS_DS_NO_NEST_LOCALGROUP_IN_MIXEDDOMAIN	In a mixed domain, cannot nest local groups with other local groups, if the group is security enabled.

<b>Return value/code</b>	<b>Description</b>
0xC00002D7 STATUS_DS_GLOBAL_CANT_HAVE_LOCAL_MEMBER	A global group cannot have a local group as a member.
0xC00002D8 STATUS_DS_GLOBAL_CANT_HAVE_UNIVERSAL_MEMBER	A global group cannot have a universal group as a member.
0xC00002D9 STATUS_DS_UNIVERSAL_CANT_HAVE_LOCAL_MEMBER	A universal group cannot have a local group as a member.
0xC00002DA STATUS_DS_GLOBAL_CANT_HAVE_CROSSDOMAIN_MEMBER	A global group cannot have a cross-domain member.
0xC00002DB STATUS_DS_LOCAL_CANT_HAVE_CROSSDOMAIN_LOCAL_MEMBER	A local group cannot have another cross-domain local group as a member.
0xC00002DC STATUS_DS_HAVE_PRIMARY_MEMBERS	Cannot change to a security-disabled group because primary members are in this group.
0xC00002DD STATUS_WMI_NOT_SUPPORTED	The WMI operation is not supported by the data block or method.
0xC00002DE STATUS_INSUFFICIENT_POWER	There is not enough power to complete the requested operation.
0xC00002DF STATUS_SAM_NEED_BOOTKEY_PASSWORD	The Security Accounts Manager needs to get the boot password.
0xC00002E0 STATUS_SAM_NEED_BOOTKEY_FLOPPY	The Security Accounts Manager needs to get the boot key from the floppy disk.
0xC00002E1 STATUS_DS_CANT_START	The directory service cannot start.
0xC00002E2 STATUS_DS_INIT_FAILURE	The directory service could not start because of the following error: %hs Error Status: 0x%x. Click OK to shut down this system and restart in Directory Services Restore Mode. Check the event log for more detailed information.
0xC00002E3 STATUS_SAM_INIT_FAILURE	The Security Accounts Manager initialization failed because of the following error: %hs Error Status: 0x%x. Click OK to shut down this system and restart in Safe Mode. Check the event log for more detailed information.
0xC00002E4 STATUS_DS_GC_REQUIRED	The requested operation can be performed only on a global catalog server.
0xC00002E5 STATUS_DS_LOCAL_MEMBER_OF_LOCAL_ONLY	A local group can only be a member of other local groups in the same domain.
0xC00002E6 STATUS_DS_NO_FPO_IN_UNIVERSAL_GROUPS	Foreign security principals cannot be members of universal groups.
0xC00002E7	Your computer could not be joined to the

<b>Return value/code</b>	<b>Description</b>
STATUS_DS_MACHINE_ACCOUNT_QUOTA_EXCEEDED	domain. You have exceeded the maximum number of computer accounts you are allowed to create in this domain. Contact your system administrator to have this limit reset or increased.
0xC00002E9 STATUS_CURRENT_DOMAIN_NOT_ALLOWED	This operation cannot be performed on the current domain.
0xC00002EA STATUS_CANNOT_MAKE	The directory or file cannot be created.
0xC00002EB STATUS_SYSTEM_SHUTDOWN	The system is in the process of shutting down.
0xC00002EC STATUS_DS_INIT_FAILURE_CONSOLE	Directory Services could not start because of the following error: %hs Error Status: 0x%x. Click OK to shut down the system. You can use the recovery console to diagnose the system further.
0xC00002ED STATUS_DS_SAM_INIT_FAILURE_CONSOLE	Security Accounts Manager initialization failed because of the following error: %hs Error Status: 0x%x. Click OK to shut down the system. You can use the recovery console to diagnose the system further.
0xC00002EE STATUS_UNFINISHED_CONTEXT_DELETED	A security context was deleted before the context was completed. This is considered a logon failure.
0xC00002EF STATUS_NO_TGT_REPLY	The client is trying to negotiate a context and the server requires user-to-user but did not send a TGT reply.
0xC00002F0 STATUS_OBJECTID_NOT_FOUND	An object ID was not found in the file.
0xC00002F1 STATUS_NO_IP_ADDRESSES	Unable to accomplish the requested task because the local machine does not have any IP addresses.
0xC00002F2 STATUS_WRONG_CREDENTIAL_HANDLE	The supplied credential handle does not match the credential that is associated with the security context.
0xC00002F3 STATUS_CRYPTOSYSTEM_INVALID	The crypto system or checksum function is invalid because a required function is unavailable.
0xC00002F4 STATUS_MAX_REFERRALS_EXCEEDED	The number of maximum ticket referrals has been exceeded.
0xC00002F5 STATUS_MUST_BE_KDC	The local machine must be a Kerberos KDC (domain controller) and it is not.
0xC00002F6 STATUS_STRONG_CRYPTOSYSTEM_NOT_SUPPORTED	The other end of the security negotiation requires strong crypto but it is not supported on the local machine.

<b>Return value/code</b>	<b>Description</b>
0xC00002F7 STATUS_TOO_MANY_PRINCIPALS	The KDC reply contained more than one principal name.
0xC00002F8 STATUS_NO_PA_DATA	Expected to find PA data for a hint of what etype to use, but it was not found.
0xC00002F9 STATUS_PKINIT_NAME_MISMATCH	The client certificate does not contain a valid UPN, or does not match the client name in the logon request. Contact your administrator.
0xC00002FA STATUS_SMARTCARD_LOGON_REQUIRED	Smart card logon is required and was not used.
0xC00002FB STATUS_KDC_INVALID_REQUEST	An invalid request was sent to the KDC.
0xC00002FC STATUS_KDC_UNABLE_TO_REFER	The KDC was unable to generate a referral for the service requested.
0xC00002FD STATUS_KDC_UNKNOWN_ETYPE	The encryption type requested is not supported by the KDC.
0xC00002FE STATUS_SHUTDOWN_IN_PROGRESS	A system shutdown is in progress.
0xC00002FF STATUS_SERVER_SHUTDOWN_IN_PROGRESS	The server machine is shutting down.
0xC0000300 STATUS_NOT_SUPPORTED_ON_SBS	This operation is not supported on a computer running Windows Server 2003 for Small Business Server.
0xC0000301 STATUS_WMI_GUID_DISCONNECTED	The WMI GUID is no longer available.
0xC0000302 STATUS_WMI_ALREADY_DISABLED	Collection or events for the WMI GUID is already disabled.
0xC0000303 STATUS_WMI_ALREADY_ENABLED	Collection or events for the WMI GUID is already enabled.
0xC0000304 STATUS_MFT_TOO_FRAGMENTED	The master file table on the volume is too fragmented to complete this operation.
0xC0000305 STATUS_COPY_PROTECTION_FAILURE	Copy protection failure.
0xC0000306 STATUS_CSS_AUTHENTICATION_FAILURE	Copy protection error—DVD CSS Authentication failed.
0xC0000307 STATUS_CSS_KEY_NOT_PRESENT	Copy protection error—The specified sector does not contain a valid key.
0xC0000308 STATUS_CSS_KEY_NOT_ESTABLISHED	Copy protection error—DVD session key not established.
0xC0000309	Copy protection error—The read failed

Return value/code	Description
STATUS_CSS_SCRAMBLED_SECTOR	because the sector is encrypted.
0xC000030A STATUS_CSS_REGION_MISMATCH	Copy protection error—The region of the specified DVD does not correspond to the region setting of the drive.
0xC000030B STATUS_CSS_RESETS_EXHAUSTED	Copy protection error—The region setting of the drive <b>may</b> be permanent.
0xC0000320 STATUS_PKINIT_FAILURE	The Kerberos protocol encountered an error while validating the KDC certificate during smart card logon. There is more information in the system event log.
0xC0000321 STATUS_SMARTCARD_SUBSYSTEM_FAILURE	The Kerberos protocol encountered an error while attempting to use the smart card subsystem.
0xC0000322 STATUS_NO_KERB_KEY	The target server does not have acceptable Kerberos credentials.
0xC0000350 STATUS_HOST_DOWN	The transport determined that the remote system is down.
0xC0000351 STATUS_UNSUPPORTED_PREAUTH	An unsupported pre-authentication mechanism was presented to the Kerberos package.
0xC0000352 STATUS_EFS_ALG_BLOB_TOO_BIG	The encryption algorithm that is used on the source file needs a bigger key buffer than the one that is used on the destination file.
0xC0000353 STATUS_PORT_NOT_SET	An attempt to remove a processes DebugPort was made, but a port was not already associated with the process.
0xC0000354 STATUS_DEBUGGER_INACTIVE	An attempt to do an operation on a debug port failed because the port is in the process of being deleted.
0xC0000355 STATUS_DS_VERSION_CHECK_FAILURE	This version of Windows is not compatible with the behavior version of the directory forest, domain, or domain controller.
0xC0000356 STATUS_AUDITING_DISABLED	The specified event is currently not being audited.
0xC0000357 STATUS_PRENT4_MACHINE_ACCOUNT	The machine account was created prior to Windows NT 4.0. The account needs to be recreated.
0xC0000358 STATUS_DS_AG_CANT_HAVE_UNIVERSAL_MEMBER	An account group cannot have a universal group as a member.
0xC0000359 STATUS_INVALID_IMAGE_WIN_32	The specified image file did not have the correct format; it appears to be a 32-bit Windows image.
0xC000035A STATUS_INVALID_IMAGE_WIN_64	The specified image file did not have the correct format; it appears to be a 64-bit

Return value/code	Description
	Windows image.
0xC000035B STATUS_BAD_BINDINGS	The client's supplied SSPI channel bindings were incorrect.
0xC000035C STATUS_NETWORK_SESSION_EXPIRED	The client session has expired; so the client must re-authenticate to continue accessing the remote resources.
0xC000035D STATUS_APPHELP_BLOCK	The AppHelp dialog box canceled; thus preventing the application from starting.
0xC000035E STATUS_ALL_SIDS_FILTERED	The SID filtering operation removed all SIDs.
0xC000035F STATUS_NOT_SAFE_MODE_DRIVER	The driver was not loaded because the system is starting in safe mode.
0xC0000361 STATUS_ACCESS_DISABLED_BY_POLICY_DEFAULT	Access to %1 has been restricted by your Administrator by the default software restriction policy level.
0xC0000362 STATUS_ACCESS_DISABLED_BY_POLICY_PATH	Access to %1 has been restricted by your Administrator by location with policy rule %2 placed on path %3.
0xC0000363 STATUS_ACCESS_DISABLED_BY_POLICY_PUBLISHER	Access to %1 has been restricted by your Administrator by software publisher policy.
0xC0000364 STATUS_ACCESS_DISABLED_BY_POLICY_OTHER	Access to %1 has been restricted by your Administrator by policy rule %2.
0xC0000365 STATUS_FAILED_DRIVER_ENTRY	The driver was not loaded because it failed its initialization call.
0xC0000366 STATUS_DEVICE_ENUMERATION_ERROR	The device encountered an error while applying power or reading the device configuration. This <del>may</del> might be caused by a failure of your hardware or by a poor connection.
0xC0000368 STATUS_MOUNT_POINT_NOT_RESOLVED	The create operation failed because the name contained at least one mount point that resolves to a volume to which the specified device object is not attached.
0xC0000369 STATUS_INVALID_DEVICE_OBJECT_PARAMETER	The device object parameter is either not a valid device object or is not attached to the volume that is specified by the file name.
0xC000036A STATUS_MCA_OCCURED	A machine check error has occurred. Check the system event log for additional information.
0xC000036B STATUS_DRIVER_BLOCKED_CRITICAL	Driver %2 has been blocked from loading.
0xC000036C	Driver %2 has been blocked from loading.

Return value/code	Description
STATUS_DRIVER_BLOCKED	
0xC000036D STATUS_DRIVER_DATABASE_ERROR	There was error [%2] processing the driver database.
0xC000036E STATUS_SYSTEM_HIVE_TOO_LARGE	System hive size has exceeded its limit.
0xC000036F STATUS_INVALID_IMPORT_OF_NON_DLL	A dynamic link library (DLL) referenced a module that was neither a DLL nor the process's executable image.
0xC0000371 STATUS_NO_SECRETS	The local account store does not contain secret material for the specified account.
0xC0000372 STATUS_ACCESS_DISABLED_NO_SAFER_UI_BY_POLICY	Access to %1 has been restricted by your Administrator by policy rule %2.
0xC0000373 STATUS_FAILED_STACK_SWITCH	The system was not able to allocate enough memory to perform a stack switch.
0xC0000374 STATUS_HEAP_CORRUPTION	A heap has been corrupted.
0xC0000380 STATUS_SMARTCARD_WRONG_PIN	An incorrect PIN was presented to the smart card.
0xC0000381 STATUS_SMARTCARD_CARD_BLOCKED	The smart card is blocked.
0xC0000382 STATUS_SMARTCARD_CARD_NOT_AUTHENTICATED	No PIN was presented to the smart card.
0xC0000383 STATUS_SMARTCARD_NO_CARD	No smart card is available.
0xC0000384 STATUS_SMARTCARD_NO_KEY_CONTAINER	The requested key container does not exist on the smart card.
0xC0000385 STATUS_SMARTCARD_NO_CERTIFICATE	The requested certificate does not exist on the smart card.
0xC0000386 STATUS_SMARTCARD_NO_KEYSET	The requested keyset does not exist.
0xC0000387 STATUS_SMARTCARD_IO_ERROR	A communication error with the smart card has been detected.
0xC0000388 STATUS_DOWNGRADE_DETECTED	The system detected a possible attempt to compromise security. Ensure that you can contact the server that authenticated you.
0xC0000389 STATUS_SMARTCARD_CERT_REVOKED	The smart card certificate used for authentication has been revoked. Contact your system administrator. There <b>may</b> be additional information in the event log.

<b>Return value/code</b>	<b>Description</b>
0xC000038A STATUS_ISSUING_CA_UNTRUSTED	An untrusted certificate authority was detected while processing the smart card certificate that is used for authentication. Contact your system administrator.
0xC000038B STATUS_REVOCATION_OFFLINE_C	The revocation status of the smart card certificate that is used for authentication could not be determined. Contact your system administrator.
0xC000038C STATUS_PKINIT_CLIENT_FAILURE	The smart card certificate used for authentication was not trusted. Contact your system administrator.
0xC000038D STATUS_SMARTCARD_CERT_EXPIRED	The smart card certificate used for authentication has expired. Contact your system administrator.
0xC000038E STATUS_DRIVER_FAILED_PRIOR_UNLOAD	The driver could not be loaded because a previous version of the driver is still in memory.
0xC000038F STATUS_SMARTCARD_SILENT_CONTEXT	The smart card provider could not perform the action because the context was acquired as silent.
0xC0000401 STATUS_PER_USER_TRUST_QUOTA_EXCEEDED	The delegated trust creation quota of the current user has been exceeded.
0xC0000402 STATUS_ALL_USER_TRUST_QUOTA_EXCEEDED	The total delegated trust creation quota has been exceeded.
0xC0000403 STATUS_USER_DELETE_TRUST_QUOTA_EXCEEDED	The delegated trust deletion quota of the current user has been exceeded.
0xC0000404 STATUS_DS_NAME_NOT_UNIQUE	The requested name already exists as a unique identifier.
0xC0000405 STATUS_DS_DUPLICATE_ID_FOUND	The requested object has a non-unique identifier and cannot be retrieved.
0xC0000406 STATUS_DS_GROUP_CONVERSION_ERROR	The group cannot be converted due to attribute restrictions on the requested group type.
0xC0000407 STATUS_VOLSNAP_PREPARE_HIBERNATE	{Volume Shadow Copy Service} Wait while the Volume Shadow Copy Service prepares volume %hs for hibernation.
0xC0000408 STATUS_USER2USER_REQUIRED	Kerberos sub-protocol User2User is required.
0xC0000409 STATUS_STACK_BUFFER_OVERRUN	The system detected an overrun of a stack-based buffer in this application. This overrun could potentially allow a malicious user to gain control of this application.
0xC000040A STATUS_NO_S4U_PROT_SUPPORT	The Kerberos subsystem encountered an error. A service for user protocol request was made against a domain controller

Return value/code	Description
	which does not support service for user.
0xC000040B STATUS_CROSSREALM_DELEGATION_FAILURE	An attempt was made by this server to make a Kerberos constrained delegation request for a target that is outside the server realm. This action is not supported and the resulting error indicates a misconfiguration on the allowed-to-delegate-to list for this server. Contact your administrator.
0xC000040C STATUS_REVOCATION_OFFLINE_KDC	The revocation status of the domain controller certificate used for smart card authentication could not be determined. There is additional information in the system event log. Contact your system administrator.
0xC000040D STATUS_ISSUING_CA_UNTRUSTED_KDC	An untrusted certificate authority was detected while processing the domain controller certificate used for authentication. There is additional information in the system event log. Contact your system administrator.
0xC000040E STATUS_KDC_CERT_EXPIRED	The domain controller certificate used for smart card logon has expired. Contact your system administrator with the contents of your system event log.
0xC000040F STATUS_KDC_CERT_REVOKED	The domain controller certificate used for smart card logon has been revoked. Contact your system administrator with the contents of your system event log.
0xC0000410 STATUS_PARAMETER_QUOTA_EXCEEDED	Data present in one of the parameters is more than the function can operate on.
0xC0000411 STATUS_HIBERNATION_FAILURE	The system has failed to hibernate (The error code is %hs). Hibernation will be disabled until the system is restarted.
0xC0000412 STATUS_DELAY_LOAD_FAILED	An attempt to delay-load a .dll or get a function address in a delay-loaded .dll failed.
0xC0000413 STATUS_AUTHENTICATION_FIREWALL_FAILED	Logon Failure: The machine you are logging onto is protected by an authentication firewall. The specified account is not allowed to authenticate to the machine.
0xC0000414 STATUS_VDM_DISALLOWED	%hs is a 16-bit application. You do not have permissions to execute 16-bit applications. Check your permissions with your system administrator.
0xC0000415 STATUS_HUNG_DISPLAY_DRIVER_THREAD	{Display Driver Stopped Responding} The %hs display driver has stopped working normally. Save your work and reboot the system to restore full display functionality. The next time you reboot the machine a dialog will be displayed

Return value/code	Description
	giving you a chance to report this failure to Microsoft.
0xC0000416 STATUS_INSUFFICIENT_RESOURCE_FOR_SPECIFIED_SHARED_SECTION_SIZE	The Desktop heap encountered an error while allocating session memory. There is more information in the system event log.
0xC0000417 STATUS_INVALID_CRUNTIME_PARAMETER	An invalid parameter was passed to a C runtime function.
0xC0000418 STATUS_NTLM_BLOCKED	The authentication failed because NTLM was blocked.
0xC0000419 STATUS_DS_SRC_SID_EXISTS_IN_FOREST	The source object's SID already exists in destination forest.
0xC000041A STATUS_DS_DOMAIN_NAME_EXISTS_IN_FOREST	The domain name of the trusted domain already exists in the forest.
0xC000041B STATUS_DS_FLAT_NAME_EXISTS_IN_FOREST	The flat name of the trusted domain already exists in the forest.
0xC000041C STATUS_INVALID_USER_PRINCIPAL_NAME	The User Principal Name (UPN) is invalid.
0xC0000420 STATUS_ASSERTION_FAILURE	There has been an assertion failure.
0xC0000421 STATUS_VERIFIER_STOP	Application verifier has found an error in the current process.
0xC0000423 STATUS_CALLBACK_POP_STACK	A user mode unwind is in progress.
0xC0000424 STATUS_INCOMPATIBLE_DRIVER_BLOCKED	%2 has been blocked from loading due to incompatibility with this system. Contact your software vendor for a compatible version of the driver.
0xC0000425 STATUS_HIVE_UNLOADED	Illegal operation attempted on a registry key which has already been unloaded.
0xC0000426 STATUS_COMPRESSION_DISABLED	Compression is disabled for this volume.
0xC0000427 STATUS_FILE_SYSTEM_LIMITATION	The requested operation could not be completed due to a file system limitation.
0xC0000428 STATUS_INVALID_IMAGE_HASH	The hash for image %hs cannot be found in the system catalogs. The image is likely corrupt or the victim of tampering.
0xC0000429 STATUS_NOT_CAPABLE	The implementation is not capable of performing the request.
0xC000042A STATUS_REQUEST_OUT_OF_SEQUENCE	The requested operation is out of order with respect to other operations.

Return value/code	Description
0xC000042B STATUS_IMPLEMENTATION_LIMIT	An operation attempted to exceed an implementation-defined limit.
0xC000042C STATUS_ELEVATION_REQUIRED	The requested operation requires elevation.
0xC000042D STATUS_NO_SECURITY_CONTEXT	The required security context does not exist.
0xC000042E STATUS_PKU2U_CERT_FAILURE	The PKU2U protocol encountered an error while attempting to utilize the associated certificates.
0xC0000432 STATUS_BEYOND_VDL	The operation was attempted beyond the valid data length of the file.
0xC0000433 STATUS_ENCOUNTED_WRITE_IN_PROGRESS	The attempted write operation encountered a write already in progress for some portion of the range.
0xC0000434 STATUS_PTE_CHANGED	The page fault mappings changed in the middle of processing a fault so the operation must be retried.
0xC0000435 STATUS_PURGE_FAILED	The attempt to purge this file from memory failed to purge some or all the data from memory.
0xC0000440 STATUS_CRED_REQUIRES_CONFIRMATION	The requested credential requires confirmation.
0xC0000441 STATUS_CS_ENCRYPTION_INVALID_SERVER_RESPONSE	The remote server sent an invalid response for a file being opened with Client Side Encryption.
0xC0000442 STATUS_CS_ENCRYPTION_UNSUPPORTED_SERVER	Client Side Encryption is not supported by the remote server even though it claims to support it.
0xC0000443 STATUS_CS_ENCRYPTION_EXISTING_ENCRYPTED_FILE	File is encrypted and should be opened in Client Side Encryption mode.
0xC0000444 STATUS_CS_ENCRYPTION_NEW_ENCRYPTED_FILE	A new encrypted file is being created and a \$EFS needs to be provided.
0xC0000445 STATUS_CS_ENCRYPTION_FILE_NOT_CSE	The SMB client requested a CSE FSCTL on a non-CSE file.
0xC0000446 STATUS_INVALID_LABEL	Indicates a particular Security ID <del>may</del> <b>cannot</b> be assigned as the label of an object.
0xC0000450 STATUS_DRIVER_PROCESS_TERMINATED	The process hosting the driver for this device has terminated.
0xC0000451 STATUS_AMBIGUOUS_SYSTEM_DEVICE	The requested system device cannot be identified due to multiple indistinguishable devices potentially matching the identification criteria.

<b>Return value/code</b>	<b>Description</b>
0xC0000452 STATUS_SYSTEM_DEVICE_NOT_FOUND	The requested system device cannot be found.
0xC0000453 STATUS_RESTART_BOOT_APPLICATION	This boot application must be restarted.
0xC0000454 STATUS_INSUFFICIENT_NVRAM_RESOURCES	Insufficient NVRAM resources exist to complete the API. A reboot might be required.
0xC0000460 STATUS_NO_RANGES_PROCESSED	No ranges for the specified operation were able to be processed.
0xC0000463 STATUS_DEVICE_FEATURE_NOT_SUPPORTED	The storage device does not support Offload Write.
0xC0000464 STATUS_DEVICE_UNREACHABLE	Data cannot be moved because the source device cannot communicate with the destination device.
0xC0000465 STATUS_INVALID_TOKEN	The token representing the data is invalid or expired.
0xC0000466 STATUS_SERVER_UNAVAILABLE	The file server is temporarily unavailable.
0xC0000500 STATUS_INVALID_TASK_NAME	The specified task name is invalid.
0xC0000501 STATUS_INVALID_TASK_INDEX	The specified task index is invalid.
0xC0000502 STATUS_THREAD_ALREADY_IN_TASK	The specified thread is already joining a task.
0xC0000503 STATUS_CALLBACK_BYPASS	A callback has requested to bypass native code.
0xC0000602 STATUS_FAIL_FAST_EXCEPTION	A fail fast exception occurred. Exception handlers will not be invoked and the process will be terminated immediately.
0xC0000603 STATUS_IMAGE_CERT_REVOKED	Windows cannot verify the digital signature for this file. The signing certificate for this file has been revoked.
0xC0000700 STATUS_PORT_CLOSED	The ALPC port is closed.
0xC0000701 STATUS_MESSAGE_LOST	The ALPC message requested is no longer available.
0xC0000702 STATUS_INVALID_MESSAGE	The ALPC message supplied is invalid.
0xC0000703 STATUS_REQUEST_CANCELED	The ALPC message has been canceled.

<b>Return value/code</b>	<b>Description</b>
0xC0000704 STATUS_RECURSIVE_DISPATCH	Invalid recursive dispatch attempt.
0xC0000705 STATUS_LPC_RECEIVE_BUFFER_EXPECTED	No receive buffer has been supplied in a synchronous request.
0xC0000706 STATUS_LPC_INVALID_CONNECTION_USAGE	The connection port is used in an invalid context.
0xC0000707 STATUS_LPC_REQUESTS_NOT_ALLOWED	The ALPC port does not accept new request messages.
0xC0000708 STATUS_RESOURCE_IN_USE	The resource requested is already in use.
0xC0000709 STATUS_HARDWARE_MEMORY_ERROR	The hardware has reported an uncorrectable memory error.
0xC000070A STATUS_THREADPOOL_HANDLE_EXCEPTION	Status 0x%08x was returned, waiting on handle 0x%x for wait 0x%p, in waiter 0x%p.
0xC000070B STATUS_THREADPOOL_SET_EVENT_ON_COMPLETION_FAILED	After a callback to 0x%p(0x%p), a completion call to Set event(0x%p) failed with status 0x%08x.
0xC000070C STATUS_THREADPOOL_RELEASE_SEMAPHORE_ON_COMPLETION_FAILED	After a callback to 0x%p(0x%p), a completion call to ReleaseSemaphore(0x%p, %d) failed with status 0x%08x.
0xC000070D STATUS_THREADPOOL_RELEASE_MUTEX_ON_COMPLETION_FAILED	After a callback to 0x%p(0x%p), a completion call to ReleaseMutex(%p) failed with status 0x%08x.
0xC000070E STATUS_THREADPOOL_FREE_LIBRARY_ON_COMPLETION_FAILED	After a callback to 0x%p(0x%p), a completion call to FreeLibrary(%p) failed with status 0x%08x.
0xC000070F STATUS_THREADPOOL_RELEASED_DURING_OPERATION	The thread pool 0x%p was released while a thread was posting a callback to 0x%p(0x%p) to it.
0xC0000710 STATUS_CALLBACK_RETURNED_WHILE_IMPERSONATING	A thread pool worker thread is impersonating a client, after a callback to 0x%p(0x%p). This is unexpected, indicating that the callback is missing a call to revert the impersonation.
0xC0000711 STATUS_APC_RETURNED_WHILE_IMPERSONATING	A thread pool worker thread is impersonating a client, after executing an APC. This is unexpected, indicating that the APC is missing a call to revert the impersonation.
0xC0000712 STATUS_PROCESS_IS_PROTECTED	Either the target process, or the target thread's containing process, is a protected process.
0xC0000713	A thread is getting dispatched with MCA EXCEPTION because of MCA.

<b>Return value/code</b>	<b>Description</b>
STATUS_MCA_EXCEPTION	
0xC0000714 STATUS_CERTIFICATE_MAPPING_NOT_UNIQUE	The client certificate account mapping is not unique.
0xC0000715 STATUS_SYMLINK_CLASS_DISABLED	The symbolic link cannot be followed because its type is disabled.
0xC0000716 STATUS_INVALID_IDN_NORMALIZATION	Indicates that the specified string is not valid for IDN normalization.
0xC0000717 STATUS_NO_UNICODE_TRANSLATION	No mapping for the Unicode character exists in the target multi-byte code page.
0xC0000718 STATUS_ALREADY_REGISTERED	The provided callback is already registered.
0xC0000719 STATUS_CONTEXT_MISMATCH	The provided context did not match the target.
0xC000071A STATUS_PORT_ALREADY_HAS_COMPLETION_LIST	The specified port already has a completion list.
0xC000071B STATUS_CALLBACK_RETURNED_THREAD_PRIORITY	A threadpool worker thread entered a callback at thread base priority 0x%x and exited at priority 0x%x. This is unexpected, indicating that the callback missed restoring the priority.
0xC000071C STATUS_INVALID_THREAD	An invalid thread, handle %p, is specified for this operation. Possibly, a threadpool worker thread was specified.
0xC000071D STATUS_CALLBACK_RETURNED_TRANSACTION	A threadpool worker thread entered a callback, which left transaction state. This is unexpected, indicating that the callback missed clearing the transaction.
0xC000071E STATUS_CALLBACK_RETURNED_LDR_LOCK	A threadpool worker thread entered a callback, which left the loader lock held. This is unexpected, indicating that the callback missed releasing the lock.
0xC000071F STATUS_CALLBACK_RETURNED_LANG	A threadpool worker thread entered a callback, which left with preferred languages set. This is unexpected, indicating that the callback missed clearing them.
0xC0000720 STATUS_CALLBACK_RETURNED_PRI_BACK	A threadpool worker thread entered a callback, which left with background priorities set. This is unexpected, indicating that the callback missed restoring the original priorities.
0xC0000800 STATUS_DISK_REPAIR_DISABLED	The attempted operation required self healing to be enabled.

<b>Return value/code</b>	<b>Description</b>
0xC0000801 STATUS_DS_DOMAIN_RENAME_IN_PROGRESS	The directory service cannot perform the requested operation because a domain rename operation is in progress.
0xC0000802 STATUS_DISK_QUOTA_EXCEEDED	An operation failed because the storage quota was exceeded.
0xC0000804 STATUS_CONTENT_BLOCKED	An operation failed because the content was blocked.
0xC0000805 STATUS_BAD_CLUSTERS	The operation could not be completed due to bad clusters on disk.
0xC0000806 STATUS_VOLUME_DIRTY	The operation could not be completed because the volume is dirty. Please run the Chkdsk utility and try again.
0xC0000901 STATUS_FILE_CHECKED_OUT	This file is checked out or locked for editing by another user.
0xC0000902 STATUS_CHECKOUT_REQUIRED	The file must be checked out before saving changes.
0xC0000903 STATUS_BAD_FILE_TYPE	The file type being saved or retrieved has been blocked.
0xC0000904 STATUS_FILE_TOO_LARGE	The file size exceeds the limit allowed and cannot be saved.
0xC0000905 STATUS_FORMS_AUTH_REQUIRED	Access Denied. Before opening files in this location, you must first browse to the e.g. site and select the option to log on automatically.
0xC0000906 STATUS_VIRUS_INFECTED	The operation did not complete successfully because the file contains a virus.
0xC0000907 STATUS_VIRUS_DELETED	This file contains a virus and cannot be opened. Due to the nature of this virus, the file has been removed from this location.
0xC0000908 STATUS_BAD_MCFG_TABLE	The resources required for this device conflict with the MCFG table.
0xC0000909 STATUS_CANNOT_BREAK_OPLOCK	The operation did not complete successfully because it would cause an oplock to be broken. The caller has requested that existing oplocks not be broken.
0xC0009898 STATUS_WOW_ASSERTION	WOW Assertion Error.
0xC000A000 STATUS_INVALID_SIGNATURE	The cryptographic signature is invalid.
0xC000A001	The cryptographic provider does not

Return value/code	Description
STATUS_HMAC_NOT_SUPPORTED	support HMAC.
0xC000A010 STATUS_IPSEC_QUEUE_OVERFLOW	The IPsec queue overflowed.
0xC000A011 STATUS_ND_QUEUE_OVERFLOW	The neighbor discovery queue overflowed.
0xC000A012 STATUS_HOPLIMIT_EXCEEDED	An Internet Control Message Protocol (ICMP) hop limit exceeded error was received.
0xC000A013 STATUS_PROTOCOL_NOT_SUPPORTED	The protocol is not installed on the local machine.
0xC000A080 STATUS_LOST_WRITEBEHIND_DATA_NETWORK_DISCONNECTED	{Delayed Write Failed} Windows was unable to save all the data for the file %hs; the data has been lost. This error <b>may</b> be caused by network connectivity issues. Try to save this file elsewhere.
0xC000A081 STATUS_LOST_WRITEBEHIND_DATA_NETWORK_SERVER_ERROR	{Delayed Write Failed} Windows was unable to save all the data for the file %hs; the data has been lost. This error was returned by the server on which the file exists. Try to save this file elsewhere.
0xC000A082 STATUS_LOST_WRITEBEHIND_DATA_LOCAL_DISK_ERROR	{Delayed Write Failed} Windows was unable to save all the data for the file %hs; the data has been lost. This error <b>may</b> be caused if the device has been removed or the media is write-protected.
0xC000A083 STATUS_XML_PARSE_ERROR	Windows was unable to parse the requested XML data.
0xC000A084 STATUS_XMLDSIG_ERROR	An error was encountered while processing an XML digital signature.
0xC000A085 STATUS_WRONG_COMPARTMENT	This indicates that the caller made the connection request in the wrong routing compartment.
0xC000A086 STATUS_AUTHIP_FAILURE	This indicates that there was an AuthIP failure when attempting to connect to the remote host.
0xC000A087 STATUS_DS_OID_MAPPED_GROUP_CANT_HAVE_MEMBERS	OID mapped groups cannot have members.
0xC000A088 STATUS_DS_OID_NOT_FOUND	The specified OID cannot be found.
0xC000A100 STATUS_HASH_NOT_SUPPORTED	Hash generation for the specified version and hash type is not enabled on server.
0xC000A101 STATUS_HASH_NOT_PRESENT	The hash requests is not present or not up to date with the current file contents.

<b>Return value/code</b>	<b>Description</b>
0xC000A2A1 STATUS_OFFLOAD_READ_FLT_NOT_SUPPORTED	A file system filter on the server has not opted in for Offload Read support.
0xC000A2A2 STATUS_OFFLOAD_WRITE_FLT_NOT_SUPPORTED	A file system filter on the server has not opted in for Offload Write support.
0xC000A2A3 STATUS_OFFLOAD_READ_FILE_NOT_SUPPORTED	Offload read operations cannot be performed on: <ul style="list-style-type: none"> <li>▪ Compressed files</li> <li>▪ Sparse files</li> <li>▪ Encrypted files</li> <li>▪ File system metadata files</li> </ul>
0xC000A2A4 STATUS_OFFLOAD_WRITE_FILE_NOT_SUPPORTED	Offload write operations cannot be performed on: <ul style="list-style-type: none"> <li>▪ Compressed files</li> <li>▪ Sparse files</li> <li>▪ Encrypted files</li> <li>▪ File system metadata files</li> </ul>
0xC0010001 DBG_NO_STATE_CHANGE	The debugger did not perform a state change.
0xC0010002 DBG_APP_NOT_IDLE	The debugger found that the application is not idle.
0xC0020001 RPC_NT_INVALID_STRING_BINDING	The string binding is invalid.
0xC0020002 RPC_NT_WRONG_KIND_OF_BINDING	The binding handle is not the correct type.
0xC0020003 RPC_NT_INVALID_BINDING	The binding handle is invalid.
0xC0020004 RPC_NT_PROTSEQ_NOT_SUPPORTED	The RPC protocol sequence is not supported.
0xC0020005 RPC_NT_INVALID_RPC_PROTSEQ	The RPC protocol sequence is invalid.
0xC0020006 RPC_NT_INVALID_STRING_UUID	The string UUID is invalid.
0xC0020007 RPC_NT_INVALID_ENDPOINT_FORMAT	The endpoint format is invalid.
0xC0020008 RPC_NT_INVALID_NET_ADDR	The network address is invalid.

<b>Return value/code</b>	<b>Description</b>
0xC0020009 RPC_NT_NO_ENDPOINT_FOUND	No endpoint was found.
0xC002000A RPC_NT_INVALID_TIMEOUT	The time-out value is invalid.
0xC002000B RPC_NT_OBJECT_NOT_FOUND	The object UUID was not found.
0xC002000C RPC_NT_ALREADY_REGISTERED	The object UUID has already been registered.
0xC002000D RPC_NT_TYPE_ALREADY_REGISTERED	The type UUID has already been registered.
0xC002000E RPC_NT_ALREADY_LISTENING	The RPC server is already listening.
0xC002000F RPC_NT_NO_PROTSEQS_REGISTERED	No protocol sequences have been registered.
0xC0020010 RPC_NT_NOT_LISTENING	The RPC server is not listening.
0xC0020011 RPC_NT_UNKNOWN_MGR_TYPE	The manager type is unknown.
0xC0020012 RPC_NT_UNKNOWN_IF	The interface is unknown.
0xC0020013 RPC_NT_NO_BINDINGS	There are no bindings.
0xC0020014 RPC_NT_NO_PROTSEQS	There are no protocol sequences.
0xC0020015 RPC_NT_CANT_CREATE_ENDPOINT	The endpoint cannot be created.
0xC0020016 RPC_NT_OUT_OF_RESOURCES	Insufficient resources are available to complete this operation.
0xC0020017 RPC_NT_SERVER_UNAVAILABLE	The RPC server is unavailable.
0xC0020018 RPC_NT_SERVER_TOO_BUSY	The RPC server is too busy to complete this operation.
0xC0020019 RPC_NT_INVALID_NETWORK_OPTIONS	The network options are invalid.
0xC002001A RPC_NT_NO_CALL_ACTIVE	No RPCs are active on this thread.
0xC002001B RPC_NT_CALL_FAILED	The RPC failed.

<b>Return value/code</b>	<b>Description</b>
0xC002001C RPC_NT_CALL_FAILED_DNE	The RPC failed and did not execute.
0xC002001D RPC_NT_PROTOCOL_ERROR	An RPC protocol error occurred.
0xC002001F RPC_NT_UNSUPPORTED_TRANS_SYN	The RPC server does not support the transfer syntax.
0xC0020021 RPC_NT_UNSUPPORTED_TYPE	The type UUID is not supported.
0xC0020022 RPC_NT_INVALID_TAG	The tag is invalid.
0xC0020023 RPC_NT_INVALID_BOUND	The array bounds are invalid.
0xC0020024 RPC_NT_NO_ENTRY_NAME	The binding does not contain an entry name.
0xC0020025 RPC_NT_INVALID_NAME_SYNTAX	The name syntax is invalid.
0xC0020026 RPC_NT_UNSUPPORTED_NAME_SYNTAX	The name syntax is not supported.
0xC0020028 RPC_NT_UUID_NO_ADDRESS	No network address is available to construct a UUID.
0xC0020029 RPC_NT_DUPLICATE_ENDPOINT	The endpoint is a duplicate.
0xC002002A RPC_NT_UNKNOWN_AUTHN_TYPE	The authentication type is unknown.
0xC002002B RPC_NT_MAX_CALLS_TOO_SMALL	The maximum number of calls is too small.
0xC002002C RPC_NT_STRING_TOO_LONG	The string is too long.
0xC002002D RPC_NT_PROTSEQ_NOT_FOUND	The RPC protocol sequence was not found.
0xC002002E RPC_NT_PROCNUM_OUT_OF_RANGE	The procedure number is out of range.
0xC002002F RPC_NT_BINDING_HAS_NO_AUTH	The binding does not contain any authentication information.
0xC0020030 RPC_NT_UNKNOWN_AUTHN_SERVICE	The authentication service is unknown.
0xC0020031 RPC_NT_UNKNOWN_AUTHN_LEVEL	The authentication level is unknown.

<b>Return value/code</b>	<b>Description</b>
0xC0020032 RPC_NT_INVALID_AUTH_IDENTITY	The security context is invalid.
0xC0020033 RPC_NT_UNKNOWN_AUTHZ_SERVICE	The authorization service is unknown.
0xC0020034 EPT_NT_INVALID_ENTRY	The entry is invalid.
0xC0020035 EPT_NT_CANT_PERFORM_OP	The operation cannot be performed.
0xC0020036 EPT_NT_NOT_REGISTERED	No more endpoints are available from the endpoint mapper.
0xC0020037 RPC_NT_NOTHING_TO_EXPORT	No interfaces have been exported.
0xC0020038 RPC_NT_INCOMPLETE_NAME	The entry name is incomplete.
0xC0020039 RPC_NT_INVALID_VERS_OPTION	The version option is invalid.
0xC002003A RPC_NT_NO_MORE_MEMBERS	There are no more members.
0xC002003B RPC_NT_NOT_ALL_OBJS_UNEXPORTED	There is nothing to unexport.
0xC002003C RPC_NT_INTERFACE_NOT_FOUND	The interface was not found.
0xC002003D RPC_NT_ENTRY_ALREADY_EXISTS	The entry already exists.
0xC002003E RPC_NT_ENTRY_NOT_FOUND	The entry was not found.
0xC002003F RPC_NT_NAME_SERVICE_UNAVAILABLE	The name service is unavailable.
0xC0020040 RPC_NT_INVALID_NAF_ID	The network address family is invalid.
0xC0020041 RPC_NT_CANNOT_SUPPORT	The requested operation is not supported.
0xC0020042 RPC_NT_NO_CONTEXT_AVAILABLE	No security context is available to allow impersonation.
0xC0020043 RPC_NT_INTERNAL_ERROR	An internal error occurred in the RPC.
0xC0020044 RPC_NT_ZERO_DIVIDE	The RPC server attempted to divide an integer by zero.

<b>Return value/code</b>	<b>Description</b>
0xC0020045 RPC_NT_ADDRESS_ERROR	An addressing error occurred in the RPC server.
0xC0020046 RPC_NT_FP_DIV_ZERO	A floating point operation at the RPC server caused a divide by zero.
0xC0020047 RPC_NT_FP_UNDERFLOW	A floating point underflow occurred at the RPC server.
0xC0020048 RPC_NT_FP_OVERFLOW	A floating point overflow occurred at the RPC server.
0xC0020049 RPC_NT_CALL_IN_PROGRESS	An RPC is already in progress for this thread.
0xC002004A RPC_NT_NO_MORE_BINDINGS	There are no more bindings.
0xC002004B RPC_NT_GROUP_MEMBER_NOT_FOUND	The group member was not found.
0xC002004C EPT_NT_CANT_CREATE	The endpoint mapper database entry could not be created.
0xC002004D RPC_NT_INVALID_OBJECT	The object UUID is the nil UUID.
0xC002004F RPC_NT_NO_INTERFACES	No interfaces have been registered.
0xC0020050 RPC_NT_CALL_CANCELLED	The RPC was canceled.
0xC0020051 RPC_NT_BINDING_INCOMPLETE	The binding handle does not contain all the required information.
0xC0020052 RPC_NT_COMM_FAILURE	A communications failure occurred during an RPC.
0xC0020053 RPC_NT_UNSUPPORTED_AUTHN_LEVEL	The requested authentication level is not supported.
0xC0020054 RPC_NT_NO_PRINC_NAME	No principal name was registered.
0xC0020055 RPC_NT_NOT_RPC_ERROR	The error specified is not a valid Windows RPC error code.
0xC0020057 RPC_NT_SEC_PKG_ERROR	A security package-specific error occurred.
0xC0020058 RPC_NT_NOT_CANCELLED	The thread was not canceled.
0xC0020062 RPC_NT_INVALID_ASYNC_HANDLE	Invalid asynchronous RPC handle.

<b>Return value/code</b>	<b>Description</b>
0xC0020063 RPC_NT_INVALID_ASYNC_CALL	Invalid asynchronous RPC call handle for this operation.
0xC0020064 RPC_NT_PROXY_ACCESS_DENIED	Access to the HTTP proxy is denied.
0xC0030001 RPC_NT_NO_MORE_ENTRIES	The list of RPC servers available for auto-handle binding has been exhausted.
0xC0030002 RPC_NT_SS_CHAR_TRANS_OPEN_FAIL	The file designated by DCERPCCHARTRANS cannot be opened.
0xC0030003 RPC_NT_SS_CHAR_TRANS_SHORT_FILE	The file containing the character translation table has fewer than 512 bytes.
0xC0030004 RPC_NT_SS_IN_NULL_CONTEXT	A null context handle is passed as an [in] parameter.
0xC0030005 RPC_NT_SS_CONTEXT_MISMATCH	The context handle does not match any known context handles.
0xC0030006 RPC_NT_SS_CONTEXT_DAMAGED	The context handle changed during a call.
0xC0030007 RPC_NT_SS_HANDLES_MISMATCH	The binding handles passed to an RPC do not match.
0xC0030008 RPC_NT_SS_CANNOT_GET_CALL_HANDLE	The stub is unable to get the call handle.
0xC0030009 RPC_NT_NULL_REF_POINTER	A null reference pointer was passed to the stub.
0xC003000A RPC_NT_ENUM_VALUE_OUT_OF_RANGE	The enumeration value is out of range.
0xC003000B RPC_NT_BYTE_COUNT_TOO_SMALL	The byte count is too small.
0xC003000C RPC_NT_BAD_STUB_DATA	The stub received bad data.
0xC0030059 RPC_NT_INVALID_ES_ACTION	Invalid operation on the encoding/decoding handle.
0xC003005A RPC_NT_WRONG_ES_VERSION	Incompatible version of the serializing package.
0xC003005B RPC_NT_WRONG_STUB_VERSION	Incompatible version of the RPC stub.
0xC003005C RPC_NT_INVALID_PIPE_OBJECT	The RPC pipe object is invalid or corrupt.
0xC003005D RPC_NT_INVALID_PIPE_OPERATION	An invalid operation was attempted on an RPC pipe object.

<b>Return value/code</b>	<b>Description</b>
0xC003005E RPC_NT_WRONG_PIPE_VERSION	Unsupported RPC pipe version.
0xC003005F RPC_NT_PIPE_CLOSED	The RPC pipe object has already been closed.
0xC0030060 RPC_NT_PIPE_DISCIPLINE_ERROR	The RPC call completed before all pipes were processed.
0xC0030061 RPC_NT_PIPE_EMPTY	No more data is available from the RPC pipe.
0xC0040035 STATUS_PNP_BAD_MPS_TABLE	A device is missing in the system BIOS MPS table. This device will not be used. Contact your system vendor for a system BIOS update.
0xC0040036 STATUS_PNP_TRANSLATION_FAILED	A translator failed to translate resources.
0xC0040037 STATUS_PNP_IRQ_TRANSLATION_FAILED	An IRQ translator failed to translate resources.
0xC0040038 STATUS_PNP_INVALID_ID	Driver %2 returned an invalid ID for a child device (%3).
0xC0040039 STATUS_IO_REISSUE_AS_CACHED	Reissue the given operation as a cached I/O operation
0xC00A0001 STATUS_CTX_WINSTATION_NAME_INVALID	Session name %1 is invalid.
0xC00A0002 STATUS_CTX_INVALID_PD	The protocol driver %1 is invalid.
0xC00A0003 STATUS_CTX_PD_NOT_FOUND	The protocol driver %1 was not found in the system path.
0xC00A0006 STATUS_CTX_CLOSE_PENDING	A close operation is pending on the terminal connection.
0xC00A0007 STATUS_CTX_NO_OUTBUF	No free output buffers are available.
0xC00A0008 STATUS_CTX_MODEM_INF_NOT_FOUND	The MODEM.INF file was not found.
0xC00A0009 STATUS_CTX_INVALID_MODEMNAME	The modem (%1) was not found in the MODEM.INF file.
0xC00A000A STATUS_CTX_RESPONSE_ERROR	The modem did not accept the command sent to it. Verify that the configured modem name matches the attached modem.
0xC00A000B STATUS_CTX_MODEM_RESPONSE_TIMEOUT	The modem did not respond to the command sent to it. Verify that the modem cable is properly attached and

<b>Return value/code</b>	<b>Description</b>
	the modem is turned on.
0xC00A000C STATUS_CTX_MODEM_RESPONSE_NO_CARRIER	Carrier detection has failed or the carrier has been dropped due to disconnection.
0xC00A000D STATUS_CTX_MODEM_RESPONSE_NO_DIALTONE	A dial tone was not detected within the required time. Verify that the phone cable is properly attached and functional.
0xC00A000E STATUS_CTX_MODEM_RESPONSE_BUSY	A busy signal was detected at a remote site on callback.
0xC00A000F STATUS_CTX_MODEM_RESPONSE_VOICE	A voice was detected at a remote site on callback.
0xC00A0010 STATUS_CTX_TD_ERROR	Transport driver error.
0xC00A0012 STATUS_CTX_LICENSE_CLIENT_INVALID	The client you are using is not licensed to use this system. Your logon request is denied.
0xC00A0013 STATUS_CTX_LICENSE_NOT_AVAILABLE	The system has reached its licensed logon limit. Try again later.
0xC00A0014 STATUS_CTX_LICENSE_EXPIRED	The system license has expired. Your logon request is denied.
0xC00A0015 STATUS_CTX_WINSTATION_NOT_FOUND	The specified session cannot be found.
0xC00A0016 STATUS_CTX_WINSTATION_NAME_COLLISION	The specified session name is already in use.
0xC00A0017 STATUS_CTX_WINSTATION_BUSY	The requested operation cannot be completed because the terminal connection is currently processing a connect, disconnect, reset, or delete operation.
0xC00A0018 STATUS_CTX_BAD_VIDEO_MODE	An attempt has been made to connect to a session whose video mode is not supported by the current client.
0xC00A0022 STATUS_CTX_GRAPHICS_INVALID	The application attempted to enable DOS graphics mode. DOS graphics mode is not supported.
0xC00A0024 STATUS_CTX_NOT_CONSOLE	The requested operation can be performed only on the system console. This is most often the result of a driver or system DLL requiring direct console access.
0xC00A0026 STATUS_CTX_CLIENT_QUERY_TIMEOUT	The client failed to respond to the server connect message.
0xC00A0027 STATUS_CTX_CONSOLE_DISCONNECT	Disconnecting the console session is not supported.

<b>Return value/code</b>	<b>Description</b>
0xC00A0028 STATUS_CTX_CONSOLE_CONNECT	Reconnecting a disconnected session to the console is not supported.
0xC00A002A STATUS_CTX_SHADOW_DENIED	The request to control another session remotely was denied.
0xC00A002B STATUS_CTX_WINSTATION_ACCESS_DENIED	A process has requested access to a session, but has not been granted those access rights.
0xC00A002E STATUS_CTX_INVALID_WD	The terminal connection driver %1 is invalid.
0xC00A002F STATUS_CTX_WD_NOT_FOUND	The terminal connection driver %1 was not found in the system path.
0xC00A0030 STATUS_CTX_SHADOW_INVALID	The requested session cannot be controlled remotely. You cannot control your own session, a session that is trying to control your session, a session that has no user logged on, or other sessions from the console.
0xC00A0031 STATUS_CTX_SHADOW_DISABLED	The requested session is not configured to allow remote control.
0xC00A0032 STATUS_RDP_PROTOCOL_ERROR	The RDP protocol component %2 detected an error in the protocol stream and has disconnected the client.
0xC00A0033 STATUS_CTX_CLIENT_LICENSE_NOT_SET	Your request to connect to this terminal server has been rejected. Your terminal server client license number has not been entered for this copy of the terminal client. Contact your system administrator for help in entering a valid, unique license number for this terminal server client. Click OK to continue.
0xC00A0034 STATUS_CTX_CLIENT_LICENSE_IN_USE	Your request to connect to this terminal server has been rejected. Your terminal server client license number is currently being used by another user. Contact your system administrator to obtain a new copy of the terminal server client with a valid, unique license number. Click OK to continue.
0xC00A0035 STATUS_CTX_SHADOW_ENDED_BY_MODE_CHANGE	The remote control of the console was terminated because the display mode was changed. Changing the display mode in a remote control session is not supported.
0xC00A0036 STATUS_CTX_SHADOW_NOT_RUNNING	Remote control could not be terminated because the specified session is not currently being remotely controlled.
0xC00A0037 STATUS_CTX_LOGON_DISABLED	Your interactive logon privilege has been disabled. Contact your system administrator.

<b>Return value/code</b>	<b>Description</b>
0xC00A0038 STATUS_CTX_SECURITY_LAYER_ERROR	The terminal server security layer detected an error in the protocol stream and has disconnected the client.
0xC00A0039 STATUS_TS_INCOMPATIBLE_SESSIONS	The target session is incompatible with the current session.
0xC00B0001 STATUS_MUI_FILE_NOT_FOUND	The resource loader failed to find an MUI file.
0xC00B0002 STATUS_MUI_INVALID_FILE	The resource loader failed to load an MUI file because the file failed to pass validation.
0xC00B0003 STATUS_MUI_INVALID_RC_CONFIG	The RC manifest is corrupted with garbage data, is an unsupported version, or is missing a required item.
0xC00B0004 STATUS_MUI_INVALID_LOCALE_NAME	The RC manifest has an invalid culture name.
0xC00B0005 STATUS_MUI_INVALID_ULTIMATEFALLBACK_NAME	The RC manifest has an invalid ultimate fallback name.
0xC00B0006 STATUS_MUI_FILE_NOT_LOADED	The resource loader cache does not have a loaded MUI entry.
0xC00B0007 STATUS_RESOURCE_ENUM_USER_STOP	The user stopped resource enumeration.
0xC0130001 STATUS_CLUSTER_INVALID_NODE	The cluster node is not valid.
0xC0130002 STATUS_CLUSTER_NODE_EXISTS	The cluster node already exists.
0xC0130003 STATUS_CLUSTER_JOIN_IN_PROGRESS	A node is in the process of joining the cluster.
0xC0130004 STATUS_CLUSTER_NODE_NOT_FOUND	The cluster node was not found.
0xC0130005 STATUS_CLUSTER_LOCAL_NODE_NOT_FOUND	The cluster local node information was not found.
0xC0130006 STATUS_CLUSTER_NETWORK_EXISTS	The cluster network already exists.
0xC0130007 STATUS_CLUSTER_NETWORK_NOT_FOUND	The cluster network was not found.
0xC0130008 STATUS_CLUSTER_NETINTERFACE_EXISTS	The cluster network interface already exists.
0xC0130009 STATUS_CLUSTER_NETINTERFACE_NOT_FOUND	The cluster network interface was not found.
0xC013000A	The cluster request is not valid for this

<b>Return value/code</b>	<b>Description</b>
STATUS_CLUSTER_INVALID_REQUEST	object.
0xC013000B STATUS_CLUSTER_INVALID_NETWORK_PROVIDER	The cluster network provider is not valid.
0xC013000C STATUS_CLUSTER_NODE_DOWN	The cluster node is down.
0xC013000D STATUS_CLUSTER_NODE_UNREACHABLE	The cluster node is not reachable.
0xC013000E STATUS_CLUSTER_NODE_NOT_MEMBER	The cluster node is not a member of the cluster.
0xC013000F STATUS_CLUSTER_JOIN_NOT_IN_PROGRESS	A cluster join operation is not in progress.
0xC0130010 STATUS_CLUSTER_INVALID_NETWORK	The cluster network is not valid.
0xC0130011 STATUS_CLUSTER_NO_NET_ADAPTERS	No network adapters are available.
0xC0130012 STATUS_CLUSTER_NODE_UP	The cluster node is up.
0xC0130013 STATUS_CLUSTER_NODE_PAUSED	The cluster node is paused.
0xC0130014 STATUS_CLUSTER_NODE_NOT_PAUSED	The cluster node is not paused.
0xC0130015 STATUS_CLUSTER_NO_SECURITY_CONTEXT	No cluster security context is available.
0xC0130016 STATUS_CLUSTER_NETWORK_NOT_INTERNAL	The cluster network is not configured for internal cluster communication.
0xC0130017 STATUS_CLUSTER_POISONED	The cluster node has been poisoned.
0xC0140001 STATUS_ACPI_INVALID_OPCODE	An attempt was made to run an invalid AML opcode.
0xC0140002 STATUS_ACPI_STACK_OVERFLOW	The AML interpreter stack has overflowed.
0xC0140003 STATUS_ACPI_ASSERT_FAILED	An inconsistent state has occurred.
0xC0140004 STATUS_ACPI_INVALID_INDEX	An attempt was made to access an array outside its bounds.
0xC0140005 STATUS_ACPI_INVALID_ARGUMENT	A required argument was not specified.
0xC0140006	A fatal error has occurred.

<b>Return value/code</b>	<b>Description</b>
STATUS_ACPI_FATAL	
0xC0140007 STATUS_ACPI_INVALID_SUPERNAME	An invalid SuperName was specified.
0xC0140008 STATUS_ACPI_INVALID_ARGTYPE	An argument with an incorrect type was specified.
0xC0140009 STATUS_ACPI_INVALID_OBJTYPE	An object with an incorrect type was specified.
0xC014000A STATUS_ACPI_INVALID_TARGETTYPE	A target with an incorrect type was specified.
0xC014000B STATUS_ACPI_INCORRECT_ARGUMENT_COUNT	An incorrect number of arguments was specified.
0xC014000C STATUS_ACPI_ADDRESS_NOT_MAPPED	An address failed to translate.
0xC014000D STATUS_ACPI_INVALID_EVENTTYPE	An incorrect event type was specified.
0xC014000E STATUS_ACPI_HANDLER_COLLISION	A handler for the target already exists.
0xC014000F STATUS_ACPI_INVALID_DATA	Invalid data for the target was specified.
0xC0140010 STATUS_ACPI_INVALID_REGION	An invalid region for the target was specified.
0xC0140011 STATUS_ACPI_INVALID_ACCESS_SIZE	An attempt was made to access a field outside the defined range.
0xC0140012 STATUS_ACPI_ACQUIRE_GLOBAL_LOCK	The global system lock could not be acquired.
0xC0140013 STATUS_ACPI_ALREADY_INITIALIZED	An attempt was made to reinitialize the ACPI subsystem.
0xC0140014 STATUS_ACPI_NOT_INITIALIZED	The ACPI subsystem has not been initialized.
0xC0140015 STATUS_ACPI_INVALID_MUTEX_LEVEL	An incorrect mutex was specified.
0xC0140016 STATUS_ACPI_MUTEX_NOT_OWNED	The mutex is not currently owned.
0xC0140017 STATUS_ACPI_MUTEX_NOT_OWNER	An attempt was made to access the mutex by a process that was not the owner.
0xC0140018 STATUS_ACPI_RS_ACCESS	An error occurred during an access to region space.
0xC0140019	An attempt was made to use an incorrect

<b>Return value/code</b>	<b>Description</b>
STATUS_ACPI_INVALID_TABLE	table.
0xC0140020 STATUS_ACPI_REG_HANDLER_FAILED	The registration of an ACPI event failed.
0xC0140021 STATUS_ACPI_POWER_REQUEST_FAILED	An ACPI power object failed to transition state.
0xC0150001 STATUS_SXS_SECTION_NOT_FOUND	The requested section is not present in the activation context.
0xC0150002 STATUS_SXS_CANT_GEN_ACTCTX	Windows was unable to process the application binding information. Refer to the system event log for further information.
0xC0150003 STATUS_SXS_INVALID_ACTCTXDATA_FORMAT	The application binding data format is invalid.
0xC0150004 STATUS_SXS_ASSEMBLY_NOT_FOUND	The referenced assembly is not installed on the system.
0xC0150005 STATUS_SXS_MANIFEST_FORMAT_ERROR	The manifest file does not begin with the required tag and format information.
0xC0150006 STATUS_SXS_MANIFEST_PARSE_ERROR	The manifest file contains one or more syntax errors.
0xC0150007 STATUS_SXS_ACTIVATION_CONTEXT_DISABLED	The application attempted to activate a disabled activation context.
0xC0150008 STATUS_SXS_KEY_NOT_FOUND	The requested lookup key was not found in any active activation context.
0xC0150009 STATUS_SXS_VERSION_CONFLICT	A component version required by the application conflicts with another component version that is already active.
0xC015000A STATUS_SXS_WRONG_SECTION_TYPE	The type requested activation context section does not match the query API used.
0xC015000B STATUS_SXS_THREAD_QUERIES_DISABLED	Lack of system resources has required isolated activation to be disabled for the current thread of execution.
0xC015000C STATUS_SXS_ASSEMBLY_MISSING	The referenced assembly could not be found.
0xC015000E STATUS_SXS_PROCESS_DEFAULT_ALREADY_SET	An attempt to set the process default activation context failed because the process default activation context was already set.
0xC015000F STATUS_SXS_EARLY_DEACTIVATION	The activation context being deactivated is not the most recently activated one.
0xC0150010 STATUS_SXS_INVALID_DEACTIVATION	The activation context being deactivated is not active for the current thread of execution.

Return value/code	Description
0xC0150011 STATUS_SXS_MULTIPLE_DEACTIVATION	The activation context being deactivated has already been deactivated.
0xC0150012 STATUS_SXS_SYSTEM_DEFAULT_ACTIVATION_CONTEXT_EMPTY	The activation context of the system default assembly could not be generated.
0xC0150013 STATUS_SXS_PROCESS_TERMINATION_REQUESTED	A component used by the isolation facility has requested that the process be terminated.
0xC0150014 STATUS_SXS_CORRUPT_ACTIVATION_STACK	The activation context activation stack for the running thread of execution is corrupt.
0xC0150015 STATUS_SXS_CORRUPTION	The application isolation metadata for this process or thread has become corrupt.
0xC0150016 STATUS_SXS_INVALID_IDENTITY_ATTRIBUTE_VALUE	The value of an attribute in an identity is not within the legal range.
0xC0150017 STATUS_SXS_INVALID_IDENTITY_ATTRIBUTE_NAME	The name of an attribute in an identity is not within the legal range.
0xC0150018 STATUS_SXS_IDENTITY_DUPLICATE_ATTRIBUTE	An identity contains two definitions for the same attribute.
0xC0150019 STATUS_SXS_IDENTITY_PARSE_ERROR	The identity string is malformed. This <b>may</b> be due to a trailing comma, more than two unnamed attributes, a missing attribute name, or a missing attribute value.
0xC015001A STATUS_SXS_COMPONENT_STORE_CORRUPT	The component store has become corrupted.
0xC015001B STATUS_SXS_FILE_HASH_MISMATCH	A component's file does not match the verification information present in the component manifest.
0xC015001C STATUS_SXS_MANIFEST_IDENTITY_SAME_BUT_CONTENTS_DIFFERENT	The identities of the manifests are identical, but their contents are different.
0xC015001D STATUS_SXS_IDENTITIES_DIFFERENT	The component identities are different.
0xC015001E STATUS_SXS_ASSEMBLY_IS_NOT_A_DEPLOYMENT	The assembly is not a deployment.
0xC015001F STATUS_SXS_FILE_NOT_PART_OF_ASSEMBLY	The file is not a part of the assembly.
0xC0150020 STATUS_ADVANCED_INSTALLER_FAILED	An advanced installer failed during setup or servicing.
0xC0150021 STATUS_XML_ENCODING_MISMATCH	The character encoding in the XML declaration did not match the encoding used in the document.

<b>Return value/code</b>	<b>Description</b>
0xC0150022 STATUS_SXS_MANIFEST_TOO_BIG	The size of the manifest exceeds the maximum allowed.
0xC0150023 STATUS_SXS_SETTING_NOT_REGISTERED	The setting is not registered.
0xC0150024 STATUS_SXS_TRANSACTION_CLOSURE_INCOMPLETE	One or more required transaction members are not present.
0xC0150025 STATUS_SMI_PRIMITIVE_INSTALLER_FAILED	The SMI primitive installer failed during setup or servicing.
0xC0150026 STATUS_GENERIC_COMMAND_FAILED	A generic command executable returned a result that indicates failure.
0xC0150027 STATUS_SXS_FILE_HASH_MISSING	A component is missing file verification information in its manifest.
0xC0190001 STATUS_TRANSACTIONAL_CONFLICT	The function attempted to use a name that is reserved for use by another transaction.
0xC0190002 STATUS_INVALID_TRANSACTION	The transaction handle associated with this operation is invalid.
0xC0190003 STATUS_TRANSACTION_NOT_ACTIVE	The requested operation was made in the context of a transaction that is no longer active.
0xC0190004 STATUS_TM_INITIALIZATION_FAILED	The transaction manager was unable to be successfully initialized. Transacted operations are not supported.
0xC0190005 STATUS_RM_NOT_ACTIVE	Transaction support within the specified file system resource manager was not started or was shut down due to an error.
0xC0190006 STATUS_RM_METADATA_CORRUPT	The metadata of the resource manager has been corrupted. The resource manager will not function.
0xC0190007 STATUS_TRANSACTION_NOT_JOINED	The resource manager attempted to prepare a transaction that it has not successfully joined.
0xC0190008 STATUS_DIRECTORY_NOT_RM	The specified directory does not contain a file system resource manager.
0xC019000A STATUS_TRANSACTIONS_UNSUPPORTED_REMOTE	The remote server or share does not support transacted file operations.
0xC019000B STATUS_LOG_RESIZE_INVALID_SIZE	The requested log size for the file system resource manager is invalid.
0xC019000C STATUS_REMOTE_FILE_VERSION_MISMATCH	The remote server sent mismatching version number or Fid for a file opened with transactions.
0xC019000F	The resource manager tried to register a protocol that already exists.

Return value/code	Description
STATUS_CRM_PROTOCOL_ALREADY_EXISTS	
0xC0190010 STATUS_TRANSACTION_PROPAGATION_FAILED	The attempt to propagate the transaction failed.
0xC0190011 STATUS_CRM_PROTOCOL_NOT_FOUND	The requested propagation protocol was not registered as a CRM.
0xC0190012 STATUS_TRANSACTION_SUPERIOR_EXISTS	The transaction object already has a superior enlistment, and the caller attempted an operation that would have created a new superior. Only a single superior enlistment is allowed.
0xC0190013 STATUS_TRANSACTION_REQUEST_NOT_VALID	The requested operation is not valid on the transaction object in its current state.
0xC0190014 STATUS_TRANSACTION_NOT_REQUESTED	The caller has called a response API, but the response is not expected because the transaction manager did not issue the corresponding request to the caller.
0xC0190015 STATUS_TRANSACTION_ALREADY_ABORTED	It is too late to perform the requested operation, because the transaction has already been aborted.
0xC0190016 STATUS_TRANSACTION_ALREADY_COMMITTED	It is too late to perform the requested operation, because the transaction has already been committed.
0xC0190017 STATUS_TRANSACTION_INVALID_MARSHALL_BUFFER	The buffer passed in to NtPushTransaction or NtPullTransaction is not in a valid format.
0xC0190018 STATUS_CURRENT_TRANSACTION_NOT_VALID	The current transaction context associated with the thread is not a valid handle to a transaction object.
0xC0190019 STATUS_LOG_GROWTH_FAILED	An attempt to create space in the transactional resource manager's log failed. The failure status has been recorded in the event log.
0xC0190021 STATUS_OBJECT_NO_LONGER_EXISTS	The object (file, stream, or link) that corresponds to the handle has been deleted by a transaction savepoint rollback.
0xC0190022 STATUS_STREAM_MINIVERSION_NOT_FOUND	The specified file miniversion was not found for this transacted file open.
0xC0190023 STATUS_STREAM_MINIVERSION_NOT_VALID	The specified file miniversion was found but has been invalidated. The most likely cause is a transaction savepoint rollback.
0xC0190024 STATUS_MINIVERSION_INACCESSIBLE_FROM_SPECIFIED_TRANSACTION	A miniversion <a href="#">maycan</a> be opened only in the context of the transaction that created it.
0xC0190025 STATUS_CANT_OPEN_MINIVERSION_WITH_MODIFY_INTENT	It is not possible to open a miniversion with modify access.

<b>Return value/code</b>	<b>Description</b>
0xC0190026 STATUS_CANT_CREATE_MORE_STREAM_MINIVERSIONS	It is not possible to create any more miniversions for this stream.
0xC0190028 STATUS_HANDLE_NO_LONGER_VALID	The handle has been invalidated by a transaction. The most likely cause is the presence of memory mapping on a file or an open handle when the transaction ended or rolled back to savepoint.
0xC0190030 STATUS_LOG_CORRUPTION_DETECTED	The log data is corrupt.
0xC0190032 STATUS_RM_DISCONNECTED	The transaction outcome is unavailable because the resource manager responsible for it is disconnected.
0xC0190033 STATUS_ENLISTMENT_NOT_SUPERIOR	The request was rejected because the enlistment in question is not a superior enlistment.
0xC0190036 STATUS_FILE_IDENTITY_NOT_PERSISTENT	The file cannot be opened in a transaction because its identity depends on the outcome of an unresolved transaction.
0xC0190037 STATUS_CANT_BREAK_TRANSACTIONAL_DEPENDENCY	The operation cannot be performed because another transaction is depending on this property not changing.
0xC0190038 STATUS_CANT_CROSS_RM_BOUNDARY	The operation would involve a single file with two transactional resource managers and is, therefore, not allowed.
0xC0190039 STATUS_TXF_DIR_NOT_EMPTY	The \$Txf directory must be empty for this operation to succeed.
0xC019003A STATUS_INDOUBT_TRANSACTIONS_EXIST	The operation would leave a transactional resource manager in an inconsistent state and is therefore not allowed.
0xC019003B STATUS_TM_VOLATILE	The operation could not be completed because the transaction manager does not have a log.
0xC019003C STATUS_ROLLBACK_TIMER_EXPIRED	A rollback could not be scheduled because a previously scheduled rollback has already executed or been queued for execution.
0xC019003D STATUS_TXF_ATTRIBUTE_CORRUPT	The transactional metadata attribute on the file or directory %hs is corrupt and unreadable.
0xC019003E STATUS_EFS_NOT_ALLOWED_IN_TRANSACTION	The encryption operation could not be completed because a transaction is active.
0xC019003F STATUS_TRANSACTIONAL_OPEN_NOT_ALLOWED	This object is not allowed to be opened in a transaction.
0xC0190040	Memory mapping (creating a mapped section) a remote file under a transaction

Return value/code	Description
STATUS_TRANSACTED_MAPPING_UNSUPPORTED_REMOTE	is not supported.
0xC0190043 STATUS_TRANSACTION_REQUIRED_PROMOTION	Promotion was required to allow the resource manager to enlist, but the transaction was set to disallow it.
0xC0190044 STATUS_CANNOT_EXECUTE_FILE_IN_TRANSACTION	This file is open for modification in an unresolved transaction and <b>may</b> be opened for execute only by a transacted reader.
0xC0190045 STATUS_TRANSACTIONS_NOT_FROZEN	The request to thaw frozen transactions was ignored because transactions were not previously frozen.
0xC0190046 STATUS_TRANSACTION_FREEZE_IN_PROGRESS	Transactions cannot be frozen because a freeze is already in progress.
0xC0190047 STATUS_NOT_SNAPSHOT_VOLUME	The target volume is not a snapshot volume. This operation is valid only on a volume mounted as a snapshot.
0xC0190048 STATUS_NO_SAVEPOINT_WITH_OPEN_FILES	The savepoint operation failed because files are open on the transaction, which is not permitted.
0xC0190049 STATUS_SPARSE_NOT_ALLOWED_IN_TRANSACTION	The sparse operation could not be completed because a transaction is active on the file.
0xC019004A STATUS_TM_IDENTITY_MISMATCH	The call to create a transaction manager object failed because the Tm Identity that is stored in the log file does not match the Tm Identity that was passed in as an argument.
0xC019004B STATUS_FLOATED_SECTION	I/O was attempted on a section object that has been floated as a result of a transaction ending. There is no valid data.
0xC019004C STATUS_CANNOT_ACCEPT_TRANSACTED_WORK	The transactional resource manager cannot currently accept transacted work due to a transient condition, such as low resources.
0xC019004D STATUS_CANNOT_ABORT_TRANSACTIONS	The transactional resource manager had too many transactions outstanding that could not be aborted. The transactional resource manager has been shut down.
0xC019004E STATUS_TRANSACTION_NOT_FOUND	The specified transaction was unable to be opened because it was not found.
0xC019004F STATUS_RESOURCEMANAGER_NOT_FOUND	The specified resource manager was unable to be opened because it was not found.
0xC0190050 STATUS_ENLISTMENT_NOT_FOUND	The specified enlistment was unable to be opened because it was not found.
0xC0190051	The specified transaction manager was

Return value/code	Description
STATUS_TRANSACTIONMANAGER_NOT_FOUND	unable to be opened because it was not found.
0xC0190052 STATUS_TRANSACTIONMANAGER_NOT_ONLINE	The specified resource manager was unable to create an enlistment because its associated transaction manager is not online.
0xC0190053 STATUS_TRANSACTIONMANAGER_RECOVERY_NAME_COLLISION	The specified transaction manager was unable to create the objects contained in its log file in the Ob namespace. Therefore, the transaction manager was unable to recover.
0xC0190054 STATUS_TRANSACTION_NOT_ROOT	The call to create a superior enlistment on this transaction object could not be completed because the transaction object specified for the enlistment is a subordinate branch of the transaction. Only the root of the transaction can be enlisted as a superior.
0xC0190055 STATUS_TRANSACTION_OBJECT_EXPIRED	Because the associated transaction manager or resource manager has been closed, the handle is no longer valid.
0xC0190056 STATUS_COMPRESSION_NOT_ALLOWED_IN_TRANSACTION	The compression operation could not be completed because a transaction is active on the file.
0xC0190057 STATUS_TRANSACTION_RESPONSE_NOT_ENLISTED	The specified operation could not be performed on this superior enlistment because the enlistment was not created with the corresponding completion response in the NotificationMask.
0xC0190058 STATUS_TRANSACTION_RECORD_TOO_LONG	The specified operation could not be performed because the record to be logged was too long. This can occur because either there are too many enlistments on this transaction or the combined RecoveryInformation being logged on behalf of those enlistments is too long.
0xC0190059 STATUS_NO_LINK_TRACKING_IN_TRANSACTION	The link-tracking operation could not be completed because a transaction is active.
0xC019005A STATUS_OPERATION_NOT_SUPPORTED_IN_TRANSACTION	This operation cannot be performed in a transaction.
0xC019005B STATUS_TRANSACTION_INTEGRITY_VIOLATED	The kernel transaction manager had to abort or forget the transaction because it blocked forward progress.
0xC0190060 STATUS_EXPIRED_HANDLE	The handle is no longer properly associated with its transaction. It <b>may</b> have been opened in a transactional resource manager that was subsequently forced to restart. Please close the handle and open a new one.

<b>Return value/code</b>	<b>Description</b>
0xC0190061 STATUS_TRANSACTION_NOT_ENLISTED	The specified operation could not be performed because the resource manager is not enlisted in the transaction.
0xC01A0001 STATUS_LOG_SECTOR_INVALID	The log service found an invalid log sector.
0xC01A0002 STATUS_LOG_SECTOR_PARITY_INVALID	The log service encountered a log sector with invalid block parity.
0xC01A0003 STATUS_LOG_SECTOR_REMAPPED	The log service encountered a remapped log sector.
0xC01A0004 STATUS_LOG_BLOCK_INCOMPLETE	The log service encountered a partial or incomplete log block.
0xC01A0005 STATUS_LOG_INVALID_RANGE	The log service encountered an attempt to access data outside the active log range.
0xC01A0006 STATUS_LOG_BLOCKS_EXHAUSTED	The log service user-log marshaling buffers are exhausted.
0xC01A0007 STATUS_LOG_READ_CONTEXT_INVALID	The log service encountered an attempt to read from a marshaling area with an invalid read context.
0xC01A0008 STATUS_LOG_RESTART_INVALID	The log service encountered an invalid log restart area.
0xC01A0009 STATUS_LOG_BLOCK_VERSION	The log service encountered an invalid log block version.
0xC01A000A STATUS_LOG_BLOCK_INVALID	The log service encountered an invalid log block.
0xC01A000B STATUS_LOG_READ_MODE_INVALID	The log service encountered an attempt to read the log with an invalid read mode.
0xC01A000D STATUS_LOG_METADATA_CORRUPT	The log service encountered a corrupted metadata file.
0xC01A000E STATUS_LOG_METADATA_INVALID	The log service encountered a metadata file that could not be created by the log file system.
0xC01A000F STATUS_LOG_METADATA_INCONSISTENT	The log service encountered a metadata file with inconsistent data.
0xC01A0010 STATUS_LOG_RESERVATION_INVALID	The log service encountered an attempt to erroneously allocate or dispose reservation space.
0xC01A0011 STATUS_LOG_CANT_DELETE	The log service cannot delete the log file or the file system container.
0xC01A0012 STATUS_LOG_CONTAINER_LIMIT_EXCEEDED	The log service has reached the maximum allowable containers allocated

<b>Return value/code</b>	<b>Description</b>
	to a log file.
0xC01A0013 STATUS_LOG_START_OF_LOG	The log service has attempted to read or write backward past the start of the log.
0xC01A0014 STATUS_LOG_POLICY_ALREADY_INSTALLED	The log policy could not be installed because a policy of the same type is already present.
0xC01A0015 STATUS_LOG_POLICY_NOT_INSTALLED	The log policy in question was not installed at the time of the request.
0xC01A0016 STATUS_LOG_POLICY_INVALID	The installed set of policies on the log is invalid.
0xC01A0017 STATUS_LOG_POLICY_CONFLICT	A policy on the log in question prevented the operation from completing.
0xC01A0018 STATUS_LOG_PINNED_ARCHIVE_TAIL	The log space cannot be reclaimed because the log is pinned by the archive tail.
0xC01A0019 STATUS_LOG_RECORD_NONEXISTENT	The log record is not a record in the log file.
0xC01A001A STATUS_LOG_RECORDS_RESERVED_INVALID	The number of reserved log records or the adjustment of the number of reserved log records is invalid.
0xC01A001B STATUS_LOG_SPACE_RESERVED_INVALID	The reserved log space or the adjustment of the log space is invalid.
0xC01A001C STATUS_LOG_TAIL_INVALID	A new or existing archive tail or the base of the active log is invalid.
0xC01A001D STATUS_LOG_FULL	The log space is exhausted.
0xC01A001E STATUS_LOG_MULTIPLEXED	The log is multiplexed; no direct writes to the physical log are allowed.
0xC01A001F STATUS_LOG_DEDICATED	The operation failed because the log is dedicated.
0xC01A0020 STATUS_LOG_ARCHIVE_NOT_IN_PROGRESS	The operation requires an archive context.
0xC01A0021 STATUS_LOG_ARCHIVE_IN_PROGRESS	Log archival is in progress.
0xC01A0022 STATUS_LOG_EPHEMERAL	The operation requires a nonephemeral log, but the log is ephemeral.
0xC01A0023 STATUS_LOG_NOT_ENOUGH_CONTAINERS	The log must have at least two containers before it can be read from or written to.
0xC01A0024 STATUS_LOG_CLIENT_ALREADY_REGISTERED	A log client has already registered on the stream.

<b>Return value/code</b>	<b>Description</b>
0xC01A0025 STATUS_LOG_CLIENT_NOT_REGISTERED	A log client has not been registered on the stream.
0xC01A0026 STATUS_LOG_FULL_HANDLER_IN_PROGRESS	A request has already been made to handle the log full condition.
0xC01A0027 STATUS_LOG_CONTAINER_READ_FAILED	The log service encountered an error when attempting to read from a log container.
0xC01A0028 STATUS_LOG_CONTAINER_WRITE_FAILED	The log service encountered an error when attempting to write to a log container.
0xC01A0029 STATUS_LOG_CONTAINER_OPEN_FAILED	The log service encountered an error when attempting to open a log container.
0xC01A002A STATUS_LOG_CONTAINER_STATE_INVALID	The log service encountered an invalid container state when attempting a requested action.
0xC01A002B STATUS_LOG_STATE_INVALID	The log service is not in the correct state to perform a requested action.
0xC01A002C STATUS_LOG_PINNED	The log space cannot be reclaimed because the log is pinned.
0xC01A002D STATUS_LOG_METADATA_FLUSH_FAILED	The log metadata flush failed.
0xC01A002E STATUS_LOG_INCONSISTENT_SECURITY	Security on the log and its containers is inconsistent.
0xC01A002F STATUS_LOG_APPENDED_FLUSH_FAILED	Records were appended to the log or reservation changes were made, but the log could not be flushed.
0xC01A0030 STATUS_LOG_PINNED_RESERVATION	The log is pinned due to reservation consuming most of the log space. Free some reserved records to make space available.
0xC01B00EA STATUS_VIDEO_HUNG_DISPLAY_DRIVER_THREAD	{Display Driver Stopped Responding} The %hs display driver has stopped working normally. Save your work and reboot the system to restore full display functionality. The next time you reboot the computer, a dialog box will allow you to upload data about this failure to Microsoft.
0xC01C0001 STATUS_FLT_NO_HANDLER_DEFINED	A handler was not defined by the filter for this operation.
0xC01C0002 STATUS_FLT_CONTEXT_ALREADY_DEFINED	A context is already defined for this object.
0xC01C0003 STATUS_FLT_INVALID_ASYNCHRONOUS_REQUEST	Asynchronous requests are not valid for this operation.

<b>Return value/code</b>	<b>Description</b>
0xC01C0004 STATUS_FLT_DISALLOW_FAST_IO	This is an internal error code used by the filter manager to determine if a fast I/O operation should be forced down the input/output request packet (IRP) path. Minifilters should never return this value.
0xC01C0005 STATUS_FLT_INVALID_NAME_REQUEST	An invalid name request was made. The name requested cannot be retrieved at this time.
0xC01C0006 STATUS_FLT_NOT_SAFE_TO_POST_OPERATION	Posting this operation to a worker thread for further processing is not safe at this time because it could lead to a system deadlock.
0xC01C0007 STATUS_FLT_NOT_INITIALIZED	The Filter Manager was not initialized when a filter tried to register. Make sure that the Filter Manager is loaded as a driver.
0xC01C0008 STATUS_FLT_FILTER_NOT_READY	The filter is not ready for attachment to volumes because it has not finished initializing (FltStartFiltering has not been called).
0xC01C0009 STATUS_FLT_POST_OPERATION_CLEANUP	The filter must clean up any operation-specific context at this time because it is being removed from the system before the operation is completed by the lower drivers.
0xC01C000A STATUS_FLT_INTERNAL_ERROR	The Filter Manager had an internal error from which it cannot recover; therefore, the operation has failed. This is usually the result of a filter returning an invalid value from a pre-operation callback.
0xC01C000B STATUS_FLT_DELETING_OBJECT	The object specified for this action is in the process of being deleted; therefore, the action requested cannot be completed at this time.
0xC01C000C STATUS_FLT_MUST_BE_NONPAGED_POOL	A nonpaged pool must be used for this type of context.
0xC01C000D STATUS_FLT_DUPLICATE_ENTRY	A duplicate handler definition has been provided for an operation.
0xC01C000E STATUS_FLT_CBDQ_DISABLED	The callback data queue has been disabled.
0xC01C000F STATUS_FLT_DO_NOT_ATTACH	Do not attach the filter to the volume at this time.
0xC01C0010 STATUS_FLT_DO_NOT_DETACH	Do not detach the filter from the volume at this time.
0xC01C0011 STATUS_FLT_INSTANCE_ALTITUDE_COLLISION	An instance already exists at this altitude on the volume specified.
0xC01C0012	An instance already exists with this name

<b>Return value/code</b>	<b>Description</b>
STATUS_FLT_INSTANCE_NAME_COLLISION	on the volume specified.
0xC01C0013 STATUS_FLT_FILTER_NOT_FOUND	The system could not find the filter specified.
0xC01C0014 STATUS_FLT_VOLUME_NOT_FOUND	The system could not find the volume specified.
0xC01C0015 STATUS_FLT_INSTANCE_NOT_FOUND	The system could not find the instance specified.
0xC01C0016 STATUS_FLT_CONTEXT_ALLOCATION_NOT_FOUND	No registered context allocation definition was found for the given request.
0xC01C0017 STATUS_FLT_INVALID_CONTEXT_REGISTRATION	An invalid parameter was specified during context registration.
0xC01C0018 STATUS_FLT_NAME_CACHE_MISS	The name requested was not found in the Filter Manager name cache and could not be retrieved from the file system.
0xC01C0019 STATUS_FLT_NO_DEVICE_OBJECT	The requested device object does not exist for the given volume.
0xC01C001A STATUS_FLT_VOLUME_ALREADY_MOUNTED	The specified volume is already mounted.
0xC01C001B STATUS_FLT_ALREADY_ENLISTED	The specified transaction context is already enlisted in a transaction.
0xC01C001C STATUS_FLT_CONTEXT_ALREADY_LINKED	The specified context is already attached to another object.
0xC01C0020 STATUS_FLT_NO_WAITER_FOR_REPLY	No waiter is present for the filter's reply to this message.
0xC01D0001 STATUS_MONITOR_NO_DESCRIPTOR	A monitor descriptor could not be obtained.
0xC01D0002 STATUS_MONITOR_UNKNOWN_DESCRIPTOR_FORMAT	This release does not support the format of the obtained monitor descriptor.
0xC01D0003 STATUS_MONITOR_INVALID_DESCRIPTOR_CHECKSUM	The checksum of the obtained monitor descriptor is invalid.
0xC01D0004 STATUS_MONITOR_INVALID_STANDARD_TIMING_BLOCK	The monitor descriptor contains an invalid standard timing block.
0xC01D0005 STATUS_MONITOR_WMI_DATABLOCK_REGISTRATION_FAILED	WMI data-block registration failed for one of the MSMonitorClass WMI subclasses.
0xC01D0006 STATUS_MONITOR_INVALID_SERIAL_NUMBER_MONDSC_BLOCK	The provided monitor descriptor block is either corrupted or does not contain the monitor's detailed serial number.
0xC01D0007 STATUS_MONITOR_INVALID_USER_FRIENDLY_MONDSC_BLOCK	The provided monitor descriptor block is either corrupted or does not contain the monitor's user-friendly name.

<b>Return value/code</b>	<b>Description</b>
0xC01D0008 STATUS_MONITOR_NO_MORE_DESCRIPTOR_DATA	There is no monitor descriptor data at the specified (offset or size) region.
0xC01D0009 STATUS_MONITOR_INVALID_DETAILED_TIMING_BLOCK	The monitor descriptor contains an invalid detailed timing block.
0xC01D000A STATUS_MONITOR_INVALID_MANUFACTURE_DATE	Monitor descriptor contains invalid manufacture date.
0xC01E0000 STATUS_GRAPHICS_NOT_EXCLUSIVE_MODE_OWNER	Exclusive mode ownership is needed to create an unmanaged primary allocation.
0xC01E0001 STATUS_GRAPHICS_INSUFFICIENT_DMA_BUFFER	The driver needs more DMA buffer space to complete the requested operation.
0xC01E0002 STATUS_GRAPHICS_INVALID_DISPLAY_ADAPTER	The specified display adapter handle is invalid.
0xC01E0003 STATUS_GRAPHICS_ADAPTER_WAS_RESET	The specified display adapter and all of its state have been reset.
0xC01E0004 STATUS_GRAPHICS_INVALID_DRIVER_MODEL	The driver stack does not match the expected driver model.
0xC01E0005 STATUS_GRAPHICS_PRESENT_MODE_CHANGED	Present happened but ended up into the changed desktop mode.
0xC01E0006 STATUS_GRAPHICS_PRESENT_OCCLUDED	Nothing to present due to desktop occlusion.
0xC01E0007 STATUS_GRAPHICS_PRESENT_DENIED	Not able to present due to denial of desktop access.
0xC01E0008 STATUS_GRAPHICS_CANNOTCOLORCONVERT	Not able to present with color conversion.
0xC01E000B STATUS_GRAPHICS_PRESENT_REDIRECTION_DISABLED	Present redirection is disabled (desktop windowing management subsystem is off).
0xC01E000C STATUS_GRAPHICS_PRESENT_UNOCCLUDED	Previous exclusive VidPn source owner has released its ownership
0xC01E0100 STATUS_GRAPHICS_NO_VIDEO_MEMORY	Not enough video memory is available to complete the operation.
0xC01E0101 STATUS_GRAPHICS_CANT_LOCK_MEMORY	Could not probe and lock the underlying memory of an allocation.
0xC01E0102 STATUS_GRAPHICS_ALLOCATION_BUSY	The allocation is currently busy.
0xC01E0103 STATUS_GRAPHICS_TOO_MANY_REFERENCES	An object being referenced has already reached the maximum reference count and cannot be referenced further.
0xC01E0104	A problem could not be solved due to an existing condition. Try again later.

<b>Return value/code</b>	<b>Description</b>
STATUS_GRAPHICS_TRY_AGAIN_LATER	
0xC01E0105 STATUS_GRAPHICS_TRY_AGAIN_NOW	A problem could not be solved due to an existing condition. Try again now.
0xC01E0106 STATUS_GRAPHICS_ALLOCATION_INVALID	The allocation is invalid.
0xC01E0107 STATUS_GRAPHICS_UNSWIZZLING_APERTURE_UNAVAILABLE	No more unswizzling apertures are currently available.
0xC01E0108 STATUS_GRAPHICS_UNSWIZZLING_APERTURE_UNSUPPORTED	The current allocation cannot be unswizzled by an aperture.
0xC01E0109 STATUS_GRAPHICS_CANT_EVICT_PINNED_ALLOCATION	The request failed because a pinned allocation cannot be evicted.
0xC01E0110 STATUS_GRAPHICS_INVALID_ALLOCATION_USAGE	The allocation cannot be used from its current segment location for the specified operation.
0xC01E0111 STATUS_GRAPHICS_CANT_RENDER_LOCKED_ALLOCATION	A locked allocation cannot be used in the current command buffer.
0xC01E0112 STATUS_GRAPHICS_ALLOCATION_CLOSED	The allocation being referenced has been closed permanently.
0xC01E0113 STATUS_GRAPHICS_INVALID_ALLOCATION_INSTANCE	An invalid allocation instance is being referenced.
0xC01E0114 STATUS_GRAPHICS_INVALID_ALLOCATION_HANDLE	An invalid allocation handle is being referenced.
0xC01E0115 STATUS_GRAPHICS_WRONG_ALLOCATION_DEVICE	The allocation being referenced does not belong to the current device.
0xC01E0116 STATUS_GRAPHICS_ALLOCATION_CONTENT_LOST	The specified allocation lost its content.
0xC01E0200 STATUS_GRAPHICS_GPU_EXCEPTION_ON_DEVICE	A GPU exception was detected on the given device. The device cannot be scheduled.
0xC01E0300 STATUS_GRAPHICS_INVALID_VIDPN_TOPOLOGY	The specified VidPN topology is invalid.
0xC01E0301 STATUS_GRAPHICS_VIDPN_TOPOLOGY_NOT_SUPPORTED	The specified VidPN topology is valid but is not supported by this model of the display adapter.
0xC01E0302 STATUS_GRAPHICS_VIDPN_TOPOLOGY_CURRENTLY_NOT_SUPPORTED	The specified VidPN topology is valid but is not currently supported by the display adapter due to allocation of its resources.
0xC01E0303 STATUS_GRAPHICS_INVALID_VIDPN	The specified VidPN handle is invalid.
0xC01E0304	The specified video present source is invalid.

<b>Return value/code</b>	<b>Description</b>
STATUS_GRAPHICS_INVALID_VIDEO_PRESENT_SOURCE	
0xC01E0305 STATUS_GRAPHICS_INVALID_VIDEO_PRESENT_TARGET	The specified video present target is invalid.
0xC01E0306 STATUS_GRAPHICS_VIDPN_MODALITY_NOT_SUPPORTED	The specified VidPN modality is not supported (for example, at least two of the pinned modes are not co-functional).
0xC01E0308 STATUS_GRAPHICS_INVALID_VIDPN_SOURCEMODESET	The specified VidPN source mode set is invalid.
0xC01E0309 STATUS_GRAPHICS_INVALID_VIDPN_TARGETMODESET	The specified VidPN target mode set is invalid.
0xC01E030A STATUS_GRAPHICS_INVALID_FREQUENCY	The specified video signal frequency is invalid.
0xC01E030B STATUS_GRAPHICS_INVALID_ACTIVE_REGION	The specified video signal active region is invalid.
0xC01E030C STATUS_GRAPHICS_INVALID_TOTAL_REGION	The specified video signal total region is invalid.
0xC01E0310 STATUS_GRAPHICS_INVALID_VIDEO_PRESENT_SOURCE_MODE	The specified video present source mode is invalid.
0xC01E0311 STATUS_GRAPHICS_INVALID_VIDEO_PRESENT_TARGET_MODE	The specified video present target mode is invalid.
0xC01E0312 STATUS_GRAPHICS_PINNED_MODE_MUST_REMAIN_IN_SET	The pinned mode must remain in the set on the VidPN's co-functional modality enumeration.
0xC01E0313 STATUS_GRAPHICS_PATH_ALREADY_IN_TOPOLOGY	The specified video present path is already in the VidPN's topology.
0xC01E0314 STATUS_GRAPHICS_MODE_ALREADY_IN_MODESET	The specified mode is already in the mode set.
0xC01E0315 STATUS_GRAPHICS_INVALID_VIDEOPRESENTSOURCESET	The specified video present source set is invalid.
0xC01E0316 STATUS_GRAPHICS_INVALID_VIDEOPRESENTTARGETSET	The specified video present target set is invalid.
0xC01E0317 STATUS_GRAPHICS_SOURCE_ALREADY_IN_SET	The specified video present source is already in the video present source set.
0xC01E0318 STATUS_GRAPHICS_TARGET_ALREADY_IN_SET	The specified video present target is already in the video present target set.
0xC01E0319 STATUS_GRAPHICS_INVALID_VIDPN_PRESENT_PATH	The specified VidPN present path is invalid.
0xC01E031A STATUS_GRAPHICS_NO_RECOMMENDED_VIDPN_TOPOLOGY	The miniport has no recommendation for augmenting the specified VidPN's topology.

<b>Return value/code</b>	<b>Description</b>
0xC01E031B STATUS_GRAPHICS_INVALID_MONITOR_FREQUENCYRANGESET	The specified monitor frequency range set is invalid.
0xC01E031C STATUS_GRAPHICS_INVALID_MONITOR_FREQUENCYRANGE	The specified monitor frequency range is invalid.
0xC01E031D STATUS_GRAPHICS_FREQUENCYRANGE_NOT_IN_SET	The specified frequency range is not in the specified monitor frequency range set.
0xC01E031F STATUS_GRAPHICS_FREQUENCYRANGE_ALREADY_IN_SET	The specified frequency range is already in the specified monitor frequency range set.
0xC01E0320 STATUS_GRAPHICS_STALE_MODESET	The specified mode set is stale. Reacquire the new mode set.
0xC01E0321 STATUS_GRAPHICS_INVALID_MONITOR_SOURCEMODESET	The specified monitor source mode set is invalid.
0xC01E0322 STATUS_GRAPHICS_INVALID_MONITOR_SOURCE_MODE	The specified monitor source mode is invalid.
0xC01E0323 STATUS_GRAPHICS_NO_RECOMMENDED_FUNCTIONAL_VIDPN	The miniport does not have a recommendation regarding the request to provide a functional VidPN given the current display adapter configuration.
0xC01E0324 STATUS_GRAPHICS_MODE_ID_MUST_BE_UNIQUE	The ID of the specified mode is being used by another mode in the set.
0xC01E0325 STATUS_GRAPHICS_EMPTY_ADAPTER_MONITOR_MODE_SUPPORT_INTERSECTION	The system failed to determine a mode that is supported by both the display adapter and the monitor connected to it.
0xC01E0326 STATUS_GRAPHICS_VIDEO_PRESENT_TARGETS_LESS_THAN_SOURCES	The number of video present targets must be greater than or equal to the number of video present sources.
0xC01E0327 STATUS_GRAPHICS_PATH_NOT_IN_TOPOLOGY	The specified present path is not in the VidPN's topology.
0xC01E0328 STATUS_GRAPHICS_ADAPTER_MUST_HAVE_AT_LEAST_ONE_SOURCE	The display adapter must have at least one video present source.
0xC01E0329 STATUS_GRAPHICS_ADAPTER_MUST_HAVE_AT_LEAST_ONE_TARGET	The display adapter must have at least one video present target.
0xC01E032A STATUS_GRAPHICS_INVALID_MONITORDESCRIPTORSET	The specified monitor descriptor set is invalid.
0xC01E032B STATUS_GRAPHICS_INVALID_MONITORDESCRIPTOR	The specified monitor descriptor is invalid.
0xC01E032C STATUS_GRAPHICS_MONITORDESCRIPTOR_NOT_IN_SET	The specified descriptor is not in the specified monitor descriptor set.

<b>Return value/code</b>	<b>Description</b>
0xC01E032D STATUS_GRAPHICS_MONITORDESCRIPTOR_ALREADY_IN_SET	The specified descriptor is already in the specified monitor descriptor set.
0xC01E032E STATUS_GRAPHICS_MONITORDESCRIPTOR_ID_MUST_BE_UNIQUE	The ID of the specified monitor descriptor is being used by another descriptor in the set.
0xC01E032F STATUS_GRAPHICS_INVALID_VIDPN_TARGET_SUBSET_TYPE	The specified video present target subset type is invalid.
0xC01E0330 STATUS_GRAPHICS_RESOURCES_NOT_RELATED	Two or more of the specified resources are not related to each other, as defined by the interface semantics.
0xC01E0331 STATUS_GRAPHICS_SOURCE_ID_MUST_BE_UNIQUE	The ID of the specified video present source is being used by another source in the set.
0xC01E0332 STATUS_GRAPHICS_TARGET_ID_MUST_BE_UNIQUE	The ID of the specified video present target is being used by another target in the set.
0xC01E0333 STATUS_GRAPHICS_NO_AVAILABLE_VIDPN_TARGET	The specified VidPN source cannot be used because there is no available VidPN target to connect it to.
0xC01E0334 STATUS_GRAPHICS_MONITOR_COULD_NOT_BE_ASSOCIATED_WITH_ADAPTER	The newly arrived monitor could not be associated with a display adapter.
0xC01E0335 STATUS_GRAPHICS_NO_VIDPNMGR	The particular display adapter does not have an associated VidPN manager.
0xC01E0336 STATUS_GRAPHICS_NO_ACTIVE_VIDPN	The VidPN manager of the particular display adapter does not have an active VidPN.
0xC01E0337 STATUS_GRAPHICS_STALE_VIDPN_TOPOLOGY	The specified VidPN topology is stale; obtain the new topology.
0xC01E0338 STATUS_GRAPHICS_MONITOR_NOT_CONNECTED	No monitor is connected on the specified video present target.
0xC01E0339 STATUS_GRAPHICS_SOURCE_NOT_IN_TOPOLOGY	The specified source is not part of the specified VidPN's topology.
0xC01E033A STATUS_GRAPHICS_INVALID_PRIMARYSURFACE_SIZE	The specified primary surface size is invalid.
0xC01E033B STATUS_GRAPHICS_INVALID_VISIBLEREGION_SIZE	The specified visible region size is invalid.
0xC01E033C STATUS_GRAPHICS_INVALID_STRIDE	The specified stride is invalid.
0xC01E033D STATUS_GRAPHICS_INVALID_PIXELFORMAT	The specified pixel format is invalid.
0xC01E033E	The specified color basis is invalid.

<b>Return value/code</b>	<b>Description</b>
STATUS_GRAPHICS_INVALID_COLORBASIS	
0xC01E033F STATUS_GRAPHICS_INVALID_PIXELVALUEACCESSMODE	The specified pixel value access mode is invalid.
0xC01E0340 STATUS_GRAPHICS_TARGET_NOT_IN_TOPOLOGY	The specified target is not part of the specified VidPN's topology.
0xC01E0341 STATUS_GRAPHICS_NO_DISPLAY_MODE_MANAGEMENT_SUPPORT	Failed to acquire the display mode management interface.
0xC01E0342 STATUS_GRAPHICS_VIDPN_SOURCE_IN_USE	The specified VidPN source is already owned by a DMM client and cannot be used until that client releases it.
0xC01E0343 STATUS_GRAPHICS_CANT_ACCESS_ACTIVE_VIDPN	The specified VidPN is active and cannot be accessed.
0xC01E0344 STATUS_GRAPHICS_INVALID_PATH_IMPORTANCE_ORDINAL	The specified VidPN's present path importance ordinal is invalid.
0xC01E0345 STATUS_GRAPHICS_INVALID_PATH_CONTENT_GEOMETRY_TRANSFORMATION	The specified VidPN's present path content geometry transformation is invalid.
0xC01E0346 STATUS_GRAPHICS_PATH_CONTENT_GEOMETRY_TRANSFORMATION_NOT_SUPPORTED	The specified content geometry transformation is not supported on the respective VidPN present path.
0xC01E0347 STATUS_GRAPHICS_INVALID_GAMMA_RAMP	The specified gamma ramp is invalid.
0xC01E0348 STATUS_GRAPHICS_GAMMA_RAMP_NOT_SUPPORTED	The specified gamma ramp is not supported on the respective VidPN present path.
0xC01E0349 STATUS_GRAPHICS_MULTISAMPLING_NOT_SUPPORTED	Multisampling is not supported on the respective VidPN present path.
0xC01E034A STATUS_GRAPHICS_MODE_NOT_IN_MODESET	The specified mode is not in the specified mode set.
0xC01E034D STATUS_GRAPHICS_INVALID_VIDPN_TOPOLOGY_RECOMMENDATION_REASON	The specified VidPN topology recommendation reason is invalid.
0xC01E034E STATUS_GRAPHICS_INVALID_PATH_CONTENT_TYPE	The specified VidPN present path content type is invalid.
0xC01E034F STATUS_GRAPHICS_INVALID_COPYPROTECTION_TYPE	The specified VidPN present path copy protection type is invalid.
0xC01E0350 STATUS_GRAPHICS_UNASSIGNED_MODESET_ALREADY_EXISTS	Only one unassigned mode set can exist at any one time for a particular VidPN source or target.
0xC01E0352 STATUS_GRAPHICS_INVALID_SCANLINE_ORDERING	The specified scan line ordering type is invalid.

<b>Return value/code</b>	<b>Description</b>
0xC01E0353 STATUS_GRAPHICS_TOPOLOGY_CHANGES_NOT_ALLOWED	The topology changes are not allowed for the specified VidPN.
0xC01E0354 STATUS_GRAPHICS_NO_AVAILABLE_IMPORTANCE_ORDINALS	All available importance ordinals are being used in the specified topology.
0xC01E0355 STATUS_GRAPHICS_INCOMPATIBLE_PRIVATE_FORMAT	The specified primary surface has a different private-format attribute than the current primary surface.
0xC01E0356 STATUS_GRAPHICS_INVALID_MODE_PRUNING_ALGORITHM	The specified mode-pruning algorithm is invalid.
0xC01E0357 STATUS_GRAPHICS_INVALID_MONITOR_CAPABILITY_ORIGIN	The specified monitor-capability origin is invalid.
0xC01E0358 STATUS_GRAPHICS_INVALID_MONITOR_FREQUENCYRANGE_CONSTRAINT	The specified monitor-frequency range constraint is invalid.
0xC01E0359 STATUS_GRAPHICS_MAX_NUM_PATHS_REACHED	The maximum supported number of present paths has been reached.
0xC01E035A STATUS_GRAPHICS_CANCEL_VIDPN_TOPOLOGY_AUGMENTATION	The miniport requested that augmentation be canceled for the specified source of the specified VidPN's topology.
0xC01E035B STATUS_GRAPHICS_INVALID_CLIENT_TYPE	The specified client type was not recognized.
0xC01E035C STATUS_GRAPHICS_CLIENTVIDPN_NOT_SET	The client VidPN is not set on this adapter (for example, no user mode-initiated mode changes have taken place on this adapter).
0xC01E0400 STATUS_GRAPHICS_SPECIFIED_CHILD_ALREADY_CONNECTED	The specified display adapter child device already has an external device connected to it.
0xC01E0401 STATUS_GRAPHICS_CHILD_DESCRIPTOR_NOT_SUPPORTED	The display adapter child device does not support reporting a descriptor.
0xC01E0430 STATUS_GRAPHICS_NOT_A_LINKED_ADAPTER	The display adapter is not linked to any other adapters.
0xC01E0431 STATUS_GRAPHICS_LEADLINK_NOT_ENUMERATED	The lead adapter in a linked configuration was not enumerated yet.
0xC01E0432 STATUS_GRAPHICS_CHAINLINKS_NOT_ENUMERATED	Some chain adapters in a linked configuration have not yet been enumerated.
0xC01E0433 STATUS_GRAPHICS_ADAPTER_CHAIN_NOT_READY	The chain of linked adapters is not ready to start because of an unknown failure.
0xC01E0434 STATUS_GRAPHICS_CHAINLINKS_NOT_STARTED	An attempt was made to start a lead link display adapter when the chain links had not yet started.

<b>Return value/code</b>	<b>Description</b>
0xC01E0435 STATUS_GRAPHICS_CHAINLINKS_NOT_POWERED_ON	An attempt was made to turn on a lead link display adapter when the chain links were turned off.
0xC01E0436 STATUS_GRAPHICS_INCONSISTENT_DEVICE_LINK_STATE	The adapter link was found in an inconsistent state. Not all adapters are in an expected PNP/power state.
0xC01E0438 STATUS_GRAPHICS_NOT_POST_DEVICE_DRIVER	The driver trying to start is not the same as the driver for the posted display adapter.
0xC01E043B STATUS_GRAPHICS_ADAPTER_ACCESS_NOT_EXCLUDED	An operation is being attempted that requires the display adapter to be in a quiescent state.
0xC01E0500 STATUS_GRAPHICS_OPM_NOT_SUPPORTED	The driver does not support OPM.
0xC01E0501 STATUS_GRAPHICS_COPP_NOT_SUPPORTED	The driver does not support COPP.
0xC01E0502 STATUS_GRAPHICS_UAB_NOT_SUPPORTED	The driver does not support UAB.
0xC01E0503 STATUS_GRAPHICS_OPM_INVALID_ENCRYPTED_PARAMETERS	The specified encrypted parameters are invalid.
0xC01E0504 STATUS_GRAPHICS_OPM_PARAMETER_ARRAY_TOO_SMALL	An array passed to a function cannot hold all of the data that the function wants to put in it.
0xC01E0505 STATUS_GRAPHICS_OPM_NO_PROTECTED_OUTPUTS_EXIST	The GDI display device passed to this function does not have any active protected outputs.
0xC01E0506 STATUS_GRAPHICS_PVP_NO_DISPLAY_DEVICE_CORRESPONDS_TO_NAME	The PVP cannot find an actual GDI display device that corresponds to the passed-in GDI display device name.
0xC01E0507 STATUS_GRAPHICS_PVP_DISPLAY_DEVICE_NOT_ATTACHED_TO_DESKTOP	This function failed because the GDI display device passed to it was not attached to the Windows desktop.
0xC01E0508 STATUS_GRAPHICS_PVP_MIRRORING_DEVICES_NOT_SUPPORTED	The PVP does not support mirroring display devices because they do not have any protected outputs.
0xC01E050A STATUS_GRAPHICS_OPM_INVALID_POINTER	The function failed because an invalid pointer parameter was passed to it. A pointer parameter is invalid if it is null, is not correctly aligned, or it points to an invalid address or a kernel mode address.
0xC01E050B STATUS_GRAPHICS_OPM_INTERNAL_ERROR	An internal error caused an operation to fail.
0xC01E050C STATUS_GRAPHICS_OPM_INVALID_HANDLE	The function failed because the caller passed in an invalid OPM user-mode handle.

<b>Return value/code</b>	<b>Description</b>
0xC01E050D STATUS_GRAPHICS_PVP_NO_MONITORS_CORRESPOND_TO_DISPLAY_DEVICE	This function failed because the GDI device passed to it did not have any monitors associated with it.
0xC01E050E STATUS_GRAPHICS_PVP_INVALID_CERTIFICATE_LENGTH	A certificate could not be returned because the certificate buffer passed to the function was too small.
0xC01E050F STATUS_GRAPHICS_OPM_SPANNING_MODE_ENABLED	DxgkDdiOpmCreateProtectedOutput() could not create a protected output because the video present yarget is in spanning mode.
0xC01E0510 STATUS_GRAPHICS_OPM_THEATER_MODE_ENABLED	DxgkDdiOpmCreateProtectedOutput() could not create a protected output because the video present target is in theater mode.
0xC01E0511 STATUS_GRAPHICS_PVP_HFS_FAILED	The function call failed because the display adapter's hardware functionality scan (HFS) failed to validate the graphics hardware.
0xC01E0512 STATUS_GRAPHICS_OPM_INVALID_SRM	The HDCP SRM passed to this function did not comply with section 5 of the HDCP 1.1 specification.
0xC01E0513 STATUS_GRAPHICS_OPM_OUTPUT_DOES_NOT_SUPPORT_HDCP	The protected output cannot enable the HDCP system because it does not support it.
0xC01E0514 STATUS_GRAPHICS_OPM_OUTPUT_DOES_NOT_SUPPORT_ACP	The protected output cannot enable analog copy protection because it does not support it.
0xC01E0515 STATUS_GRAPHICS_OPM_OUTPUT_DOES_NOT_SUPPORT_CGMSA	The protected output cannot enable the CGMS-A protection technology because it does not support it.
0xC01E0516 STATUS_GRAPHICS_OPM_HDCP_SRM_NEVER_SET	DxgkDdiOPMGetInformation() cannot return the version of the SRM being used because the application never successfully passed an SRM to the protected output.
0xC01E0517 STATUS_GRAPHICS_OPM_RESOLUTION_TOO_HIGH	DxgkDdiOPMConfigureProtectedOutput() cannot enable the specified output protection technology because the output's screen resolution is too high.
0xC01E0518 STATUS_GRAPHICS_OPM_ALL_HDCP_HARDWARE_ALREADY_IN_USE	DxgkDdiOPMConfigureProtectedOutput() cannot enable HDCP because other physical outputs are using the display adapter's HDCP hardware.
0xC01E051A STATUS_GRAPHICS_OPM_PROTECTED_OUTPUT_NO_LONGER_EXISTS	The operating system asynchronously destroyed this OPM-protected output because the operating system state changed. This error typically occurs because the monitor PDO associated with this protected output was removed or stopped, the protected output's session

Return value/code	Description
	became a nonconsole session, or the protected output's desktop became inactive.
0xC01E051B STATUS_GRAPHICS_OPM_SESSION_TYPE_CHANGE_IN_PROGRESS	OPM functions cannot be called when a session is changing its type. Three types of sessions currently exist: console, disconnected, and remote (RDP or ICA).
0xC01E051C STATUS_GRAPHICS_OPM_PROTECTED_OUTPUT_DOES_NOT_HAVE_COPP_SEMANTICS	The DxgkDdiOPMGetCOPPCompatibleInformation, DxgkDdiOPMGetInformation, or DxgkDdiOPMConfigureProtectedOutput function failed. This error is returned only if a protected output has OPM semantics. DxgkDdiOPMGetCOPPCompatibleInformation always returns this error if a protected output has OPM semantics. DxgkDdiOPMGetInformation returns this error code if the caller requested COPP-specific information. DxgkDdiOPMConfigureProtectedOutput returns this error when the caller tries to use a COPP-specific command.
0xC01E051D STATUS_GRAPHICS_OPM_INVALID_INFORMATION_REQUEST	The DxgkDdiOPMGetInformation and DxgkDdiOPMGetCOPPCompatibleInformation functions return this error code if the passed-in sequence number is not the expected sequence number or the passed-in OMAC value is invalid.
0xC01E051E STATUS_GRAPHICS_OPM_DRIVER_INTERNAL_ERROR	The function failed because an unexpected error occurred inside a display driver.
0xC01E051F STATUS_GRAPHICS_OPM_PROTECTED_OUTPUT_DOES_NOT_HAVE_OPM_SEMANTICS	The DxgkDdiOPMGetCOPPCompatibleInformation, DxgkDdiOPMGetInformation, or DxgkDdiOPMConfigureProtectedOutput function failed. This error is returned only if a protected output has COPP semantics. DxgkDdiOPMGetCOPPCompatibleInformation returns this error code if the caller requested OPM-specific information. DxgkDdiOPMGetInformation always returns this error if a protected output has COPP semantics. DxgkDdiOPMConfigureProtectedOutput returns this error when the caller tries to use an OPM-specific command.
0xC01E0520 STATUS_GRAPHICS_OPM_SIGNALING_NOT_SUPPORTED	The DxgkDdiOPMGetCOPPCompatibleInformation and DxgkDdiOPMConfigureProtectedOutput functions return this error if the display driver does not support the DXGKMDT_OPM_GET_ACP_AND_CGMSA_SIGNALING and

<b>Return value/code</b>	<b>Description</b>
	DXGKMDT_OPM_SET_ACP_AND_CGMSA_SIGNALING GUIDs.
0xC01E0521 STATUS_GRAPHICS_OPM_INVALID_CONFIGURATION_REQUEST	The DxgkDdiOPMConfigureProtectedOutput function returns this error code if the passed-in sequence number is not the expected sequence number or the passed-in OMAC value is invalid.
0xC01E0580 STATUS_GRAPHICS_I2C_NOT_SUPPORTED	The monitor connected to the specified video output does not have an I2C bus.
0xC01E0581 STATUS_GRAPHICS_I2C_DEVICE_DOES_NOT_EXIST	No device on the I2C bus has the specified address.
0xC01E0582 STATUS_GRAPHICS_I2C_ERROR_TRANSMITTING_DATA	An error occurred while transmitting data to the device on the I2C bus.
0xC01E0583 STATUS_GRAPHICS_I2C_ERROR_RECEIVING_DATA	An error occurred while receiving data from the device on the I2C bus.
0xC01E0584 STATUS_GRAPHICS_DDCCI_VCP_NOT_SUPPORTED	The monitor does not support the specified VCP code.
0xC01E0585 STATUS_GRAPHICS_DDCCI_INVALID_DATA	The data received from the monitor is invalid.
0xC01E0586 STATUS_GRAPHICS_DDCCI_MONITOR_RETURNED_INVALID_TIMING_STATUS_BYTE	A function call failed because a monitor returned an invalid timing status byte when the operating system used the DDC/CI get timing report and timing message command to get a timing report from a monitor.
0xC01E0587 STATUS_GRAPHICS_DDCCI_INVALID_CAPABILITIES_STRING	A monitor returned a DDC/CI capabilities string that did not comply with the ACCESS.bus 3.0, DDC/CI 1.1, or MCCS 2 Revision 1 specification.
0xC01E0588 STATUS_GRAPHICS_MCA_INTERNAL_ERROR	An internal error caused an operation to fail.
0xC01E0589 STATUS_GRAPHICS_DDCCI_INVALID_MESSAGE_COMMAND	An operation failed because a DDC/CI message had an invalid value in its command field.
0xC01E058A STATUS_GRAPHICS_DDCCI_INVALID_MESSAGE_LENGTH	This error occurred because a DDC/CI message had an invalid value in its length field.
0xC01E058B STATUS_GRAPHICS_DDCCI_INVALID_MESSAGE_CHECKSUM	This error occurred because the value in a DDC/CI message's checksum field did not match the message's computed checksum value. This error implies that the data was corrupted while it was being transmitted from a monitor to a computer.
0xC01E058C	This function failed because an invalid monitor handle was passed to it.

<b>Return value/code</b>	<b>Description</b>
STATUS_GRAPHICS_INVALID_PHYSICAL_MONITOR_HANDLE	
0xC01E058D STATUS_GRAPHICS_MONITOR_NO_LONGER_EXISTS	The operating system asynchronously destroyed the monitor that corresponds to this handle because the operating system's state changed. This error typically occurs because the monitor PDO associated with this handle was removed or stopped, or a display mode change occurred. A display mode change occurs when Windows sends a WM_DISPLAYCHANGE message to applications.
0xC01E05E0 STATUS_GRAPHICS_ONLY_CONSOLE_SESSION_SUPPORTED	This function can be used only if a program is running in the local console session. It cannot be used if a program is running on a remote desktop session or on a terminal server session.
0xC01E05E1 STATUS_GRAPHICS_NO_DISPLAY_DEVICE_CORRESPONDS_TO_NAME	This function cannot find an actual GDI display device that corresponds to the specified GDI display device name.
0xC01E05E2 STATUS_GRAPHICS_DISPLAY_DEVICE_NOT_ATTACHED_TO_DESKTOP	The function failed because the specified GDI display device was not attached to the Windows desktop.
0xC01E05E3 STATUS_GRAPHICS_MIRRORING_DEVICES_NOT_SUPPORTED	This function does not support GDI mirroring display devices because GDI mirroring display devices do not have any physical monitors associated with them.
0xC01E05E4 STATUS_GRAPHICS_INVALID_POINTER	The function failed because an invalid pointer parameter was passed to it. A pointer parameter is invalid if it is null, is not correctly aligned, or points to an invalid address or to a kernel mode address.
0xC01E05E5 STATUS_GRAPHICS_NO_MONITORS_CORRESPOND_TO_DISPLAY_DEVICE	This function failed because the GDI device passed to it did not have a monitor associated with it.
0xC01E05E6 STATUS_GRAPHICS_PARAMETER_ARRAY_TOO_SMALL	An array passed to the function cannot hold all of the data that the function must copy into the array.
0xC01E05E7 STATUS_GRAPHICS_INTERNAL_ERROR	An internal error caused an operation to fail.
0xC01E05E8 STATUS_GRAPHICS_SESSION_TYPE_CHANGE_IN_PROGRESS	The function failed because the current session is changing its type. This function cannot be called when the current session is changing its type. Three types of sessions currently exist: console, disconnected, and remote (RDP or ICA).
0xC0210000 STATUS_FVE_LOCKED_VOLUME	The volume must be unlocked before it can be used.

<b>Return value/code</b>	<b>Description</b>
0xC0210001 STATUS_FVE_NOT_ENCRYPTED	The volume is fully decrypted and no key is available.
0xC0210002 STATUS_FVE_BAD_INFORMATION	The control block for the encrypted volume is not valid.
0xC0210003 STATUS_FVE_TOO_SMALL	Not enough free space remains on the volume to allow encryption.
0xC0210004 STATUS_FVE_FAILED_WRONG_FS	The partition cannot be encrypted because the file system is not supported.
0xC0210005 STATUS_FVE_FAILED_BAD_FS	The file system is inconsistent. Run the Check Disk utility.
0xC0210006 STATUS_FVE_FS_NOT_EXTENDED	The file system does not extend to the end of the volume.
0xC0210007 STATUS_FVE_FS_MOUNTED	This operation cannot be performed while a file system is mounted on the volume.
0xC0210008 STATUS_FVE_NO_LICENSE	BitLocker Drive Encryption is not included with this version of Windows.
0xC0210009 STATUS_FVE_ACTION_NOT_ALLOWED	The requested action was denied by the FVE control engine.
0xC021000A STATUS_FVE_BAD_DATA	The data supplied is malformed.
0xC021000B STATUS_FVE_VOLUME_NOT_BOUND	The volume is not bound to the system.
0xC021000C STATUS_FVE_NOT_DATA_VOLUME	The volume specified is not a data volume.
0xC021000D STATUS_FVE_CONV_READ_ERROR	A read operation failed while converting the volume.
0xC021000E STATUS_FVE_CONV_WRITE_ERROR	A write operation failed while converting the volume.
0xC021000F STATUS_FVE_OVERLAPPED_UPDATE	The control block for the encrypted volume was updated by another thread. Try again.
0xC0210010 STATUS_FVE_FAILED_SECTOR_SIZE	The volume encryption algorithm cannot be used on this sector size.
0xC0210011 STATUS_FVE_FAILED_AUTHENTICATION	BitLocker recovery authentication failed.
0xC0210012 STATUS_FVE_NOT_OS_VOLUME	The volume specified is not the boot operating system volume.
0xC0210013 STATUS_FVE_KEYFILE_NOT_FOUND	The BitLocker startup key or recovery password could not be read from external

Return value/code	Description
	media.
0xC0210014 STATUS_FVE_KEYFILE_INVALID	The BitLocker startup key or recovery password file is corrupt or invalid.
0xC0210015 STATUS_FVE_KEYFILE_NO_VMK	The BitLocker encryption key could not be obtained from the startup key or the recovery password.
0xC0210016 STATUS_FVE_TPM_DISABLED	The TPM is disabled.
0xC0210017 STATUS_FVE_TPM_SRK_AUTH_NOT_ZERO	The authorization data for the SRK of the TPM is not zero.
0xC0210018 STATUS_FVE_TPM_INVALID_PCR	The system boot information changed or the TPM locked out access to BitLocker encryption keys until the computer is restarted.
0xC0210019 STATUS_FVE_TPM_NO_VMK	The BitLocker encryption key could not be obtained from the TPM.
0xC021001A STATUS_FVE_PIN_INVALID	The BitLocker encryption key could not be obtained from the TPM and PIN.
0xC021001B STATUS_FVE_AUTH_INVALID_APPLICATION	A boot application hash does not match the hash computed when BitLocker was turned on.
0xC021001C STATUS_FVE_AUTH_INVALID_CONFIG	The Boot Configuration Data (BCD) settings are not supported or have changed because BitLocker was enabled.
0xC021001D STATUS_FVE_DEBUGGER_ENABLED	Boot debugging is enabled. Run Windows Boot Configuration Data Store Editor (bcdedit.exe) to turn it off.
0xC021001E STATUS_FVE_DRY_RUN_FAILED	The BitLocker encryption key could not be obtained.
0xC021001F STATUS_FVE_BAD_METADATA_POINTER	The metadata disk region pointer is incorrect.
0xC0210020 STATUS_FVE_OLD_METADATA_COPY	The backup copy of the metadata is out of date.
0xC0210021 STATUS_FVE_REBOOT_REQUIRED	No action was taken because a system restart is required.
0xC0210022 STATUS_FVE_RAW_ACCESS	No action was taken because BitLocker Drive Encryption is in RAW access mode.
0xC0210023 STATUS_FVE_RAW_BLOCKED	BitLocker Drive Encryption cannot enter RAW access mode for this volume.
0xC0210026 STATUS_FVE_NO_FEATURE_LICENSE	This feature of BitLocker Drive Encryption is not included with this version of Windows.

<b>Return value/code</b>	<b>Description</b>
0xC0210027 STATUS_FVE_POLICY_USER_DISABLE_RDV_NOT_ALLOWED	Group policy does not permit turning off BitLocker Drive Encryption on roaming data volumes.
0xC0210028 STATUS_FVE_CONV_RECOVERY_FAILED	Bitlocker Drive Encryption failed to recover from aborted conversion. This could be due to either all conversion logs being corrupted or the media being write-protected.
0xC0210029 STATUS_FVE_VIRTUALIZED_SPACE_TOO_BIG	The requested virtualization size is too big.
0xC0210030 STATUS_FVE_VOLUME_TOO_SMALL	The drive is too small to be protected using BitLocker Drive Encryption.
0xC0220001 STATUS_FWP_CALLOUT_NOT_FOUND	The callout does not exist.
0xC0220002 STATUS_FWP_CONDITION_NOT_FOUND	The filter condition does not exist.
0xC0220003 STATUS_FWP_FILTER_NOT_FOUND	The filter does not exist.
0xC0220004 STATUS_FWP_LAYER_NOT_FOUND	The layer does not exist.
0xC0220005 STATUS_FWP_PROVIDER_NOT_FOUND	The provider does not exist.
0xC0220006 STATUS_FWP_PROVIDER_CONTEXT_NOT_FOUND	The provider context does not exist.
0xC0220007 STATUS_FWP_SUBLAYER_NOT_FOUND	The sublayer does not exist.
0xC0220008 STATUS_FWP_NOT_FOUND	The object does not exist.
0xC0220009 STATUS_FWP_ALREADY_EXISTS	An object with that GUID or LUID already exists.
0xC022000A STATUS_FWP_IN_USE	The object is referenced by other objects and cannot be deleted.
0xC022000B STATUS_FWP_DYNAMIC_SESSION_IN_PROGRESS	The call is not allowed from within a dynamic session.
0xC022000C STATUS_FWP_WRONG_SESSION	The call was made from the wrong session and cannot be completed.
0xC022000D STATUS_FWP_NO_TXN_IN_PROGRESS	The call must be made from within an explicit transaction.
0xC022000E STATUS_FWP_TXN_IN_PROGRESS	The call is not allowed from within an explicit transaction.

<b>Return value/code</b>	<b>Description</b>
0xC022000F STATUS_FWP_TXN_ABORTED	The explicit transaction has been forcibly canceled.
0xC0220010 STATUS_FWP_SESSION_ABORTED	The session has been canceled.
0xC0220011 STATUS_FWP_INCOMPATIBLE_TXN	The call is not allowed from within a read-only transaction.
0xC0220012 STATUS_FWP_TIMEOUT	The call timed out while waiting to acquire the transaction lock.
0xC0220013 STATUS_FWP_NET_EVENTS_DISABLED	The collection of network diagnostic events is disabled.
0xC0220014 STATUS_FWP_INCOMPATIBLE_LAYER	The operation is not supported by the specified layer.
0xC0220015 STATUS_FWP_KM_CLIENTS_ONLY	The call is allowed for kernel-mode callers only.
0xC0220016 STATUS_FWP_LIFETIME_MISMATCH	The call tried to associate two objects with incompatible lifetimes.
0xC0220017 STATUS_FWP_BUILTIN_OBJECT	The object is built-in and cannot be deleted.
0xC0220018 STATUS_FWP_TOO_MANY_BOOTTIME_FILTERS	The maximum number of boot-time filters has been reached.
0xC0220018 STATUS_FWP_TOO_MANY_CALLOUTS	The maximum number of callouts has been reached.
0xC0220019 STATUS_FWP_NOTIFICATION_DROPPED	A notification could not be delivered because a message queue has reached maximum capacity.
0xC022001A STATUS_FWP_TRAFFIC_MISMATCH	The traffic parameters do not match those for the security association context.
0xC022001B STATUS_FWP_INCOMPATIBLE_SA_STATE	The call is not allowed for the current security association state.
0xC022001C STATUS_FWP_NULL_POINTER	A required pointer is null.
0xC022001D STATUS_FWP_INVALID_ENUMERATOR	An enumerator is not valid.
0xC022001E STATUS_FWP_INVALID_FLAGS	The flags field contains an invalid value.
0xC022001F STATUS_FWP_INVALID_NET_MASK	A network mask is not valid.
0xC0220020 STATUS_FWP_INVALID_RANGE	An FWP_RANGE is not valid.

<b>Return value/code</b>	<b>Description</b>
0xC0220021 STATUS_FWP_INVALID_INTERVAL	The time interval is not valid.
0xC0220022 STATUS_FWP_ZERO_LENGTH_ARRAY	An array that must contain at least one element has a zero length.
0xC0220023 STATUS_FWP_NULL_DISPLAY_NAME	The displayData.name field cannot be null.
0xC0220024 STATUS_FWP_INVALID_ACTION_TYPE	The action type is not one of the allowed action types for a filter.
0xC0220025 STATUS_FWP_INVALID_WEIGHT	The filter weight is not valid.
0xC0220026 STATUS_FWP_MATCH_TYPE_MISMATCH	A filter condition contains a match type that is not compatible with the operands.
0xC0220027 STATUS_FWP_TYPE_MISMATCH	An FWP_VALUE or FWPM_CONDITION_VALUE is of the wrong type.
0xC0220028 STATUS_FWP_OUT_OF_BOUNDS	An integer value is outside the allowed range.
0xC0220029 STATUS_FWP_RESERVED	A reserved field is nonzero.
0xC022002A STATUS_FWP_DUPLICATE_CONDITION	A filter cannot contain multiple conditions operating on a single field.
0xC022002B STATUS_FWP_DUPLICATE_KEYMOD	A policy cannot contain the same keying module more than once.
0xC022002C STATUS_FWP_ACTION_INCOMPATIBLE_WITH_LAYER	The action type is not compatible with the layer.
0xC022002D STATUS_FWP_ACTION_INCOMPATIBLE_WITH_SUBLAYER	The action type is not compatible with the sublayer.
0xC022002E STATUS_FWP_CONTEXT_INCOMPATIBLE_WITH_LAYER	The raw context or the provider context is not compatible with the layer.
0xC022002F STATUS_FWP_CONTEXT_INCOMPATIBLE_WITH_CALLOUT	The raw context or the provider context is not compatible with the callout.
0xC0220030 STATUS_FWP_INCOMPATIBLE_AUTH_METHOD	The authentication method is not compatible with the policy type.
0xC0220031 STATUS_FWP_INCOMPATIBLE_DH_GROUP	The Diffie-Hellman group is not compatible with the policy type.
0xC0220032 STATUS_FWP_EM_NOT_SUPPORTED	An IKE policy cannot contain an Extended Mode policy.
0xC0220033 STATUS_FWP_NEVER_MATCH	The enumeration template or subscription will never match any objects.

<b>Return value/code</b>	<b>Description</b>
0xC0220034 STATUS_FWP_PROVIDER_CONTEXT_MISMATCH	The provider context is of the wrong type.
0xC0220035 STATUS_FWP_INVALID_PARAMETER	The parameter is incorrect.
0xC0220036 STATUS_FWP_TOO_MANY_SUBLAYERS	The maximum number of sublayers has been reached.
0xC0220037 STATUS_FWP_CALLOUT_NOTIFICATION_FAILED	The notification function for a callout returned an error.
0xC0220038 STATUS_FWP_INCOMPATIBLE_AUTH_CONFIG	The IPsec authentication configuration is not compatible with the authentication type.
0xC0220039 STATUS_FWP_INCOMPATIBLE_CIPHER_CONFIG	The IPsec cipher configuration is not compatible with the cipher type.
0xC022003C STATUS_FWP_DUPLICATE_AUTH_METHOD	A policy cannot contain the same auth method more than once.
0xC0220100 STATUS_FWP_TCPIP_NOT_READY	The TCP/IP stack is not ready.
0xC0220101 STATUS_FWP_INJECT_HANDLE_CLOSING	The injection handle is being closed by another thread.
0xC0220102 STATUS_FWP_INJECT_HANDLE_STALE	The injection handle is stale.
0xC0220103 STATUS_FWP_CANNOT_PEND	The classify cannot be pended.
0xC0230002 STATUS_NDIS_CLOSING	The binding to the network interface is being closed.
0xC0230004 STATUS_NDIS_BAD_VERSION	An invalid version was specified.
0xC0230005 STATUS_NDIS_BAD_CHARACTERISTICS	An invalid characteristics table was used.
0xC0230006 STATUS_NDIS_ADAPTER_NOT_FOUND	Failed to find the network interface or the network interface is not ready.
0xC0230007 STATUS_NDIS_OPEN_FAILED	Failed to open the network interface.
0xC0230008 STATUS_NDIS_DEVICE_FAILED	The network interface has encountered an internal unrecoverable failure.
0xC0230009 STATUS_NDIS_MULTICAST_FULL	The multicast list on the network interface is full.
0xC023000A STATUS_NDIS_MULTICAST_EXISTS	An attempt was made to add a duplicate multicast address to the list.

<b>Return value/code</b>	<b>Description</b>
0xC023000B STATUS_NDIS_MULTICAST_NOT_FOUND	At attempt was made to remove a multicast address that was never added.
0xC023000C STATUS_NDIS_REQUEST_ABORTED	The network interface aborted the request.
0xC023000D STATUS_NDIS_RESET_IN_PROGRESS	The network interface cannot process the request because it is being reset.
0xC023000F STATUS_NDIS_INVALID_PACKET	An attempt was made to send an invalid packet on a network interface.
0xC0230010 STATUS_NDIS_INVALID_DEVICE_REQUEST	The specified request is not a valid operation for the target device.
0xC0230011 STATUS_NDIS_ADAPTER_NOT_READY	The network interface is not ready to complete this operation.
0xC0230014 STATUS_NDIS_INVALID_LENGTH	The length of the buffer submitted for this operation is not valid.
0xC0230015 STATUS_NDIS_INVALID_DATA	The data used for this operation is not valid.
0xC0230016 STATUS_NDIS_BUFFER_TOO_SHORT	The length of the submitted buffer for this operation is too small.
0xC0230017 STATUS_NDIS_INVALID_OID	The network interface does not support this object identifier.
0xC0230018 STATUS_NDIS_ADAPTER_REMOVED	The network interface has been removed.
0xC0230019 STATUS_NDIS_UNSUPPORTED_MEDIA	The network interface does not support this media type.
0xC023001A STATUS_NDIS_GROUP_ADDRESS_IN_USE	An attempt was made to remove a token ring group address that is in use by other components.
0xC023001B STATUS_NDIS_FILE_NOT_FOUND	An attempt was made to map a file that cannot be found.
0xC023001C STATUS_NDIS_ERROR_READING_FILE	An error occurred while NDIS tried to map the file.
0xC023001D STATUS_NDIS_ALREADY_MAPPED	An attempt was made to map a file that is already mapped.
0xC023001E STATUS_NDIS_RESOURCE_CONFLICT	An attempt to allocate a hardware resource failed because the resource is used by another component.
0xC023001F STATUS_NDIS_MEDIA_DISCONNECTED	The I/O operation failed because the network media is disconnected or the wireless access point is out of range.
0xC0230022	The network address used in the request

<b>Return value/code</b>	<b>Description</b>
STATUS_NDIS_INVALID_ADDRESS	is invalid.
0xC023002A STATUS_NDIS_PAUSED	The offload operation on the network interface has been paused.
0xC023002B STATUS_NDIS_INTERFACE_NOT_FOUND	The network interface was not found.
0xC023002C STATUS_NDIS_UNSUPPORTED_REVISION	The revision number specified in the structure is not supported.
0xC023002D STATUS_NDIS_INVALID_PORT	The specified port does not exist on this network interface.
0xC023002E STATUS_NDIS_INVALID_PORT_STATE	The current state of the specified port on this network interface does not support the requested operation.
0xC023002F STATUS_NDIS_LOW_POWER_STATE	The miniport adapter is in a lower power state.
0xC02300BB STATUS_NDIS_NOT_SUPPORTED	The network interface does not support this request.
0xC023100F STATUS_NDIS_OFFLOAD_POLICY	The TCP connection is not offloadable because of a local policy setting.
0xC0231012 STATUS_NDIS_OFFLOAD_CONNECTION_REJECTED	The TCP connection is not offloadable by the Chimney offload target.
0xC0231013 STATUS_NDIS_OFFLOAD_PATH_REJECTED	The IP Path object is not in an offloadable state.
0xC0232000 STATUS_NDIS_DOT11_AUTO_CONFIG_ENABLED	The wireless LAN interface is in auto-configuration mode and does not support the requested parameter change operation.
0xC0232001 STATUS_NDIS_DOT11_MEDIA_IN_USE	The wireless LAN interface is busy and cannot perform the requested operation.
0xC0232002 STATUS_NDIS_DOT11_POWER_STATE_INVALID	The wireless LAN interface is power down and does not support the requested operation.
0xC0232003 STATUS_NDIS_PM_WOL_PATTERN_LIST_FULL	The list of wake on LAN patterns is full.
0xC0232004 STATUS_NDIS_PM_PROTOCOL_OFFLOAD_LIST_FULL	The list of low power protocol offloads is full.
0xC0360001 STATUS_IPSEC_BAD_SPI	The SPI in the packet does not match a valid IPsec SA.
0xC0360002 STATUS_IPSEC_SA_LIFETIME_EXPIRED	The packet was received on an IPsec SA whose lifetime has expired.
0xC0360003	The packet was received on an IPsec SA that does not match the packet

<b>Return value/code</b>	<b>Description</b>
STATUS_IPSEC_WRONG_SA	characteristics.
0xC0360004 STATUS_IPSEC_REPLAY_CHECK_FAILED	The packet sequence number replay check failed.
0xC0360005 STATUS_IPSEC_INVALID_PACKET	The IPsec header and/or trailer in the packet is invalid.
0xC0360006 STATUS_IPSEC_INTEGRITY_CHECK_FAILED	The IPsec integrity check failed.
0xC0360007 STATUS_IPSEC_CLEAR_TEXT_DROP	IPsec dropped a clear text packet.
0xC0360008 STATUS_IPSEC_AUTH_FIREWALL_DROP	IPsec dropped an incoming ESP packet in authenticated firewall mode. This drop is benign.
0xC0360009 STATUS_IPSEC_THROTTLE_DROP	IPsec dropped a packet due to DOS throttle.
0xC0368000 STATUS_IPSEC_DOSP_BLOCK	IPsec Dos Protection matched an explicit block rule.
0xC0368001 STATUS_IPSEC_DOSP_RECEIVED_MULTICAST	IPsec Dos Protection received an IPsec specific multicast packet which is not allowed.
0xC0368002 STATUS_IPSEC_DOSP_INVALID_PACKET	IPsec Dos Protection received an incorrectly formatted packet.
0xC0368003 STATUS_IPSEC_DOSP_STATE_LOOKUP_FAILED	IPsec Dos Protection failed to lookup state.
0xC0368004 STATUS_IPSEC_DOSP_MAX_ENTRIES	IPsec Dos Protection failed to create state because there are already maximum number of entries allowed by policy.
0xC0368005 STATUS_IPSEC_DOSP_KEYMOD_NOT_ALLOWED	IPsec Dos Protection received an IPsec negotiation packet for a keying module which is not allowed by policy.
0xC0368006 STATUS_IPSEC_DOSP_MAX_PER_IP_RATELIMIT_QUEUES	IPsec Dos Protection failed to create per internal IP ratelimit queue because there is already maximum number of queues allowed by policy.
0xC038005B STATUS_VOLMGR_MIRROR_NOT_SUPPORTED	The system does not support mirrored volumes.
0xC038005C STATUS_VOLMGR_RAID5_NOT_SUPPORTED	The system does not support RAID-5 volumes.
0xC03A0014 STATUS_VIRTDISK_PROVIDER_NOT_FOUND	A virtual disk support provider for the specified file was not found.
0xC03A0015 STATUS_VIRTDISK_NOT_VIRTUAL_DISK	The specified disk is not a virtual disk.

Return value/code	Description
0xC03A0016 STATUS_VHD_PARENT_VHD_ACCESS_DENIED	The chain of virtual hard disks is inaccessible. The process has not been granted access rights to the parent virtual hard disk for the differencing disk.
0xC03A0017 STATUS_VHD_CHILD_PARENT_SIZE_MISMATCH	The chain of virtual hard disks is corrupted. There is a mismatch in the virtual sizes of the parent virtual hard disk and differencing disk.
0xC03A0018 STATUS_VHD_DIFFERENCING_CHAIN_CYCLE_DETECTED	The chain of virtual hard disks is corrupted. A differencing disk is indicated in its own parent chain.
0xC03A0019 STATUS_VHD_DIFFERENCING_CHAIN_ERROR_IN_PARENT	The chain of virtual hard disks is inaccessible. There was an error opening a virtual hard disk further up the chain.

## 2.4 LDAP Error to Win32 Error Mapping

Windows contains an implementation of the LDAP resultCode ([RFC2251] section 4.1.10) which is used by higher-layer protocols to interpret the results of an LDAP operation.

Each LDAP error value is also mapped to the closest Win32 error value, for use by the higher-layer protocols. This mapping is as shown in the following table:

Value: Decimal	Value: Hexadecimal representation	LDAPResult.resultCode: RFC 1777	LDAPResult.resultCode: RFC 2251	Windows: Ldap Error (LDAP_RETCODE from winldap.w)	Windows: Win32 error (from LdapMapErrorToWin32 / winmain\ds\ds\src\ldap\client\util.cxx)
0	0x0	success	success	LDAP_SUCCESS	NO_ERROR
1	0x1	operationsError	operationsError	LDAP_OPERATIONS_ERROR	ERROR_OPEN_FAILED
2	0x2	protocolError	protocolError	LDAP_PROTOCOL_ERROR	ERROR_INVALID_LEVEL
3	0x3	timeLimitExceeded	timeLimitExceeded	LDAP_TIMELIMIT_EXCEEDED	ERROR_TIMEOUT
4	0x4	sizeLimitExceeded	sizeLimitExceeded	LDAP_SIZELIMIT_EXCEEDED	ERROR_MORE_DATA
5	0x5	compareFalse	compareFalse	LDAP_COMPARE_FALSE	ERROR_DS_GENERIC_ERROR
6	0x6	compareTrue	compareTrue	LDAP_COMPARE_TRUE	ERROR_DS_GENERIC_ERROR
7	0x7	authMethodNotSupported	authMethodNotSupported	LDAP_AUTH_METHOD_NOT_SUPPORTED	ERROR_ACCESS_DENIED
8	0x8	strongAuthRequired	strongAuthRequired	LDAP_STRONG_AUTH_REQUIRED	ERROR_ACCESS_DENIED

Value: Decimal	Value: Hexadecimal representation	LDAPResult.resultCode: RFC 1777	LDAPResult.resultCode: RFC 2251	Windows: Ldap Error (LDAP_RETCODE from winldap.w)	Windows: Win32 error (from LdapMapErrorToWin32 / winmain\ds\ds\src\ldap\client\util.cxx)
9	0x9		9 reserved	LDAP_REFERRAL_V2, LDAP_PARTIAL_RESULTS	ERROR_MORE_DATA
10	0xA		referral	LDAP_REFERRAL	
11	0xB		adminLimitExceeded	LDAP_ADMIN_LIMIT_EXCEEDED	ERROR_NOT_ENOUGH_QUOTA
12	0xC		unavailableCriticalExtension	LDAP_UNAVAILABLE_CRITICAL_EXTENSION	ERROR_CAN_NOT_COMPLETE
13	0xD		confidentialityRequired	LDAP_CONFIDENTIALITY_REQUIRED	
14	0xE		saslBindInProgress	LDAP_SASL_BIND_IN_PROGRESS	
15	0xF				
16	0x10	noSuchAttribute	noSuchAttribute	LDAP_NO_SUCH_ATTRIBUTE	ERROR_INVALID_PARAMETER
17	0x11	undefinedAttributeType	undefinedAttributeType	LDAP_UNDEFINED_TYPE	ERROR_DS_GENERIC_ERROR
18	0x12	inappropriateMatching	inappropriateMatching	LDAP_INAPPROPRIATE_MATCHING	ERROR_INVALID_PARAMETER
19	0x13	constraintViolation	constraintViolation	LDAP_CONSTRAINT_VIOLATION	ERROR_INVALID_PARAMETER
20	0x14	attributeOrValueExists	attributeOrValueExists	LDAP_ATTRIBUTE_OR_VALUE_EXISTS	ERROR_ALREADY_EXISTS
21	0x15	invalidAttributeSyntax	invalidAttributeSyntax	LDAP_INVALID_SYNTAX	ERROR_INVALID_NAME
22	0x16				
23	0x17				
24	0x18				
25	0x19				
26	0x1A				
27	0x1B				
28	0x1C				
29	0x1D				
30	0x1E				
31	0x1F				
32	0x20	noSuchObject	noSuchObject	LDAP_NO_SUCH_OBJECT	ERROR_FILE_NOT_FOUND

Value: Decimal	Value: Hexadecimal representation	LDAPResult.resultCode: RFC 1777	LDAPResult.resultCode: RFC 2251	Windows: Ldap Error (LDAP_RETCODE from winldap.w)	Windows: Win32 error (from LdapMapErrorToWin32 / winmain\ds\ds\src\ldap\client\util.cxx)
				T	
33	0x21	aliasProblem	aliasProblem	LDAP_ALIAS_PROBLEM	ERROR_DS_GENERIC_ERROR
34	0x22	invalidDNSyntax	invalidDNSyntax	LDAP_INVALID_DN_SYNTAX	ERROR_INVALID_PARAMETER
35	0x23	isLeaf	35 reserved for undefined isLeaf	LDAP_IS_LEAF	ERROR_DS_GENERIC_ERROR
36	0x24	aliasDereferencingProblem	aliasDereferencingProblem	LDAP_ALIAS_DEREF_PROBLEM	ERROR_DS_GENERIC_ERROR
37	0x25		37-47 unused		
38	0x26				
39	0x27				
40	0x28				
41	0x29				
42	0x2A				
43	0x2B				
44	0x2C				
45	0x2D				
46	0x2E				
47	0x2F				
48	0x30	inappropriateAuthentication	inappropriateAuthentication	LDAP_INAPPROPRIATE_AUTH	ERROR_ACCESS_DENIED
49	0x31	invalidCredentials	invalidCredentials	LDAP_INVALID_CREDENTIALS	ERROR_LOGON_FAILURE
50	0x32	insufficientAccessRights	insufficientAccessRights	LDAP_INSUFFICIENT_RIGHTS	ERROR_ACCESS_DENIED
51	0x33	busy	busy	LDAP_BUSY	ERROR_BUSY
52	0x34	unavailable	unavailable	LDAP_UNAVAILABLE	ERROR_DEV_NOT_EXIST
53	0x35	unwillingToPerform	unwillingToPerform	LDAP_UNWILLING_TO_PERFORM	ERROR_CAN_NOT_COMPLETE
54	0x36	loopDetect	loopDetect	LDAP_LOOP_DETECT	ERROR_DS_GENERIC_ERROR
55	0x37		55-63 unused		
56	0x38				

Value: Decimal	Value: Hexadecimal representation	LDAPResult.resultCode: RFC 1777	LDAPResult.resultCode: RFC 2251	Windows: Ldap Error (LDAP_RETCODE from winldap.w)	Windows: Win32 error (from LdapMapErrorToWin32 / winmain\ds\ds\src\ldap\client\util.cxx)
57	0x39				
58	0x3A				
59	0x3B				
60	0x3C			LDAP_SORT_CONTROL_MISSING	ERROR_DS_SORT_CONTROL_MISSING
61	0x3D			LDAP_OFFSET_RANGE_ERROR	ERROR_DS_OFFSET_RANGE_ERROR
62	0x3E				
63	0x3F				
64	0x40	namingViolation	namingViolation	LDAP_NAMING_VIOLATION	ERROR_INVALID_PARAMETER
65	0x41	objectClassViolation	objectClassViolation	LDAP_OBJECT_CLASS_VIOLATION	ERROR_INVALID_PARAMETER
66	0x42	notAllowedOnNonLeaf	notAllowedOnNonLeaf	LDAP_NOT_ALLOWED_ON_NONLEAF	ERROR_CAN_NOT_COMPLETE
67	0x43	notAllowedOnRDN	notAllowedOnRDN	LDAP_NOT_ALLOWED_ON_RDN	ERROR_ACCESS_DENIED
68	0x44	entryAlreadyExists	entryAlreadyExists	LDAP_ALREADY_EXISTS	ERROR_ALREADY_EXISTS
69	0x45	objectClassModsProhibited	objectClassModsProhibited	LDAP_NO_OBJECT_CLASSES_MODS	ERROR_ACCESS_DENIED
70	0x46		70 reserved for CLDAP	LDAP_RESULTS_TOO_LARGE	ERROR_INSUFFICIENT_BUFFER
71	0x47		affectsMultipleDSAs	LDAP_AFFECTS_MULTIPLE_DSAS	ERROR_CAN_NOT_COMPLETE
72	0x48		72-79 unused		
73	0x49				
74	0x4A				
75	0x4B				
76	0x4C			LDAP_VIRTUAL_LIST_VIEW_ERROR	
77	0x4D				
78	0x4E				
79	0x4F				
80	0x50	other	other	LDAP_OTHER	ERROR_DS_GENERIC_ERROR

<b>Value: Decimal</b>	<b>Value: Hexadecimal representation</b>	<b>LDAPResult.resultCode: RFC 1777</b>	<b>LDAPResult.resultCode: RFC 2251</b>	<b>Windows: Ldap Error (LDAP_RETCODE from winldap.w)</b>	<b>Windows: Win32 error (from LdapMapErrorToWin32 / winmain\ds\ds\src\ldap\client\util.cxx)</b>
81	0x51		81-90 reserved for APIs	LDAP_SERVER_DOWN	ERROR_BAD_NET_RESP
82	0x52			LDAP_LOCAL_ERROR	ERROR_DS_GENERIC_ERROR
83	0x53			LDAP_ENCODING_ERROR	ERROR_UNEXP_NET_ERROR
84	0x54			LDAP_DECODING_ERROR	ERROR_UNEXP_NET_ERROR
85	0x55			LDAP_TIMEOUT	ERROR_SERVICE_REQUEST_TIMEOUT
86	0x56			LDAP_AUTH_UNKNOWN	ERROR_WRONG_PASSWORD
87	0x57			LDAP_FILTER_ERROR	ERROR_INVALID_PARAMETER
88	0x58			LDAP_USER_CANCELLED	ERROR_CANCELLED
89	0x59			LDAP_PARAM_ERROR	ERROR_INVALID_PARAMETER
90	0x5A			LDAP_NO_MEMORY	ERROR_NOT_ENOUGH_MEMORY
91	0x5B			LDAP_CONNECT_ERROR	ERROR_CONNECTION_REFUSED
92	0x5C			LDAP_NOT_SUPPORTED	ERROR_CAN_NOT_COMPLETE
93	0x5D			LDAP_NO_RESULTS_RETURNED	ERROR_MORE_DATA
94	0x5E			LDAP_CONTROL_NOT_FOUND	ERROR_NOT_FOUND
95	0x5F			LDAP_MORE_RESULTS_TO_RETURN	ERROR_MORE_DATA
96	0x60			LDAP_CLIENT_LOOP	
97	0x61			LDAP_REFERRAL_LIMIT_EXCEEDED	
98	0x62				

### 3 Structure Example

There are no structure examples.

## 4 Security Considerations

These structures require no security considerations beyond those of the protocols that utilize them.

## 5 Appendix A: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs.

~~Note: Some of the information in this section is subject to change because it applies to a preliminary product version, and thus may differ from the final version of the software when released. All behavior notes that pertain to the preliminary product version contain specific references to it as an aid to the reader.~~

- Windows NT operating system
- Windows 2000 operating system
- Windows XP operating system
- Windows Server 2003 operating system
- Windows Vista operating system
- Windows Server 2008 operating system
- Windows 7 operating system
- Windows Server 2008 R2 operating system
- Windows 8 operating system
- Windows Server 2012 operating system
- Windows 8.1 operating system
- Windows Server 2012 R2 operating system
- Windows 10 operating system
- Windows Server 2016 ~~Technical Preview~~ operating system

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

<1> Section 2.1: All HRESULT values used by Microsoft have the **C** bit clear.

<2> Section 2.1: The following HRESULT codes have the X bit set to 1:

Value	Name
0x0DEAD100	TRK_S_OUT_OF_SYNC
0x0DEAD102	TRK_VOLUME_NOT_FOUND
0x0DEAD103	TRK_VOLUME_NOT_OWNED
0x0DEAD107	TRK_S_NOTIFICATION_QUOTA_EXCEEDED

Value	Name
0x8DEAD01B	TRK_E_NOT_FOUND
0x8DEAD01C	TRK_E_VOLUME_QUOTA_EXCEEDED
0x8DEAD01E	TRK_SERVER_TOO_BUSY

<3> Section 2.2: ~~Unless specified otherwise, Windows uses only the values in the following table3: All NTSTATUS values that are used by Microsoft have the C bit clear.~~

<4> ~~Section 2.3: All NTSTATUS values that are used by Microsoft have the C bit clear.~~

<5<4> Section 2.3: Windows defines the following NTSTATUS facility values when the C bit is clear.

Name	Value
FACILITY_DEBUGGER	0x001
FACILITY_RPC_RUNTIME	0x002
FACILITY_RPC_STUBS	0x003
FACILITY_IO_ERROR_CODE	0x004
FACILITY_NTWIN32	0x007
FACILITY_NTSSPI	0x009
FACILITY_TERMINAL_SERVER	0x00A
FACILITY_MUI_ERROR_CODE	0x00B
FACILITY_USB_ERROR_CODE	0x010
FACILITY_HID_ERROR_CODE	0x011
FACILITY_FIREWIRE_ERROR_CODE	0x012
FACILITY_CLUSTER_ERROR_CODE	0x013
FACILITY_ACPI_ERROR_CODE	0x014
FACILITY_SXS_ERROR_CODE	0x015
FACILITY_TRANSACTION	0x019
FACILITY_COMMONLOG	0x01A
FACILITY_VIDEO	0x01B
FACILITY_FILTER_MANAGER	0x01C
FACILITY_MONITOR	0x01D
FACILITY_GRAPHICS_KERNEL	0x01E
FACILITY_DRIVER_FRAMEWORK	0x020
FACILITY_FVE_ERROR_CODE	0x021
FACILITY_FWP_ERROR_CODE	0x022
FACILITY_NDIS_ERROR_CODE	0x023

<b>Name</b>	<b>Value</b>
FACILITY_HYPERVISOR	0x035
FACILITY_IPSEC	0x036
FACILITY_MAXIMUM_VALUE	0x037

## 6 Change Tracking

~~No table of This section identifies changes is available. The that were made to this document is either new or has had no changes since its the last release. Changes are classified as New, Major, Minor, Editorial, or No change.~~

~~The revision class **New** means that a new document is being released.~~

~~The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:~~

- ~~▪ A document revision that incorporates changes to interoperability requirements or functionality.~~
- ~~▪ The removal of a document from the documentation set.~~

~~The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.~~

~~The revision class **Editorial** means that the formatting in the technical content was changed. Editorial changes apply to grammatical, formatting, and style issues.~~

~~The revision class **No change** means that no new technical changes were introduced. Minor editorial and formatting changes may have been made, but the technical content of the document is identical to the last released version.~~

~~Major and minor changes can be described further using the following change types:~~

- ~~▪ New content added.~~
- ~~▪ Content updated.~~
- ~~▪ Content removed.~~
- ~~▪ New product behavior note added.~~
- ~~▪ Product behavior note updated.~~
- ~~▪ Product behavior note removed.~~
- ~~▪ New protocol syntax added.~~
- ~~▪ Protocol syntax updated.~~
- ~~▪ Protocol syntax removed.~~
- ~~▪ New content added due to protocol revision.~~
- ~~▪ Content updated due to protocol revision.~~
- ~~▪ Content removed due to protocol revision.~~
- ~~▪ New protocol syntax added due to protocol revision.~~
- ~~▪ Protocol syntax updated due to protocol revision.~~
- ~~▪ Protocol syntax removed due to protocol revision.~~
- ~~▪ Obsolete document removed.~~

~~Editorial changes are always classified with the change type **Editorially updated**.~~

Some important terms used in the change type descriptions are defined as follows:

- **Protocol syntax** refers to data elements (such as packets, structures, enumerations, and methods) as well as interfaces.
- **Protocol revision** refers to changes made to a protocol that affect the bits that are sent over the wire.

The changes made to this document are listed in the following table. For more information, please contact [dochelp@microsoft.com](mailto:dochelp@microsoft.com).

<b>Section</b>	<b>Tracking number (if applicable) and description</b>	<b>Major change (Y or N)</b>	<b>Change type</b>
<u><a href="#">2.1.1 HRESULT Values</a></u>	<u><a href="#">72891</a> : Added the error code <code>ERROR_DISK_FULL</code>.</u>	<u>Y</u>	<u>Content update.</u>
<u><a href="#">2.3.1 NTSTATUS Values</a></u>	<u><a href="#">73008</a> : Added entry for <code>STATUS_SHARE_UNAVAILABLE (0xC0000480)</code></u>	<u>Y</u>	<u>Content update.</u>

## **7 Index**

### **A**

Applicability 6

### **C**

Change tracking 496

### **E**

Examples 491

### **F**

Fields - vendor extensible 6

Fields - vendor-extensible 6

### **G**

Glossary 5

### **H**

HRESULTS packet 7

### **I**

Implementer - security considerations 492

Informative references 6

Introduction 5

### **L**

Localization 6

### **N**

Normative references 5

NTSTATUS packet 374

### **O**

Overview 6

Overview (synopsis) 6

### **P**

Product behavior 493

### **R**

References 5

informative 6

normative 5

Relationship to protocols and other structures 6

Relationships

other protocols 6

other structures 6

### **S**

Security - considerations 492  
Security - implementer considerations 492  
Structures 7

## **T**

Tracking changes 496

## **V**

Vendor extensible fields 6  
Vendor-extensible fields 6  
Versioning 6