

[MS-RDPEL]:

Remote Desktop Protocol: Location Virtual Channel Extension

Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation (“this documentation”) for protocols, file formats, data portability, computer languages, and standards support. Additionally, overview documents cover inter-protocol relationships and interactions.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you can make copies of it in order to develop implementations of the technologies that are described in this documentation and can distribute portions of it in your implementations that use these technologies or in your documentation as necessary to properly document the implementation. You can also distribute in your implementation, with or without modification, any schemas, IDLs, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications documentation.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that might cover your implementations of the technologies described in the Open Specifications documentation. Neither this notice nor Microsoft's delivery of this documentation grants any licenses under those patents or any other Microsoft patents. However, a given Open Specifications document might be covered by the Microsoft [Open Specifications Promise](#) or the [Microsoft Community Promise](#). If you would prefer a written license, or if the technologies described in this documentation are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting iplg@microsoft.com.
- **License Programs.** To see all of the protocols in scope under a specific license program and the associated patents, visit the [Patent Map](#).
- **Trademarks.** The names of companies and products contained in this documentation might be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights. For a list of Microsoft trademarks, visit www.microsoft.com/trademarks.
- **Fictitious Names.** The example companies, organizations, products, domain names, email addresses, logos, people, places, and events that are depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

Reservation of Rights. All other rights are reserved, and this notice does not grant any rights other than as specifically described above, whether by implication, estoppel, or otherwise.

Tools. The Open Specifications documentation does not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments, you are free to take advantage of them. Certain Open Specifications documents are intended for use in conjunction with publicly available standards specifications and network programming art and, as such, assume that the reader either is familiar with the aforementioned material or has immediate access to it.

Support. For questions and support, please contact dochelp@microsoft.com.

Revision Summary

Date	Revision History	Revision Class	Comments
9/20/2023	1.0	New	Released new document.

Table of Contents

1	Introduction	5
1.1	Glossary	5
1.2	References	5
1.2.1	Normative References	5
1.2.2	Informative References	5
1.3	Overview	6
1.4	Relationship to Other Protocols	6
1.5	Prerequisites/Preconditions	7
1.6	Applicability Statement	7
2	Messages.....	8
2.1	Transport.....	8
2.2	Message Syntax.....	8
2.2.1	Common Data Types.....	8
2.2.1.1	FOUR_BYTE_SIGNED_INTEGER	8
2.2.1.2	FOUR_BYTE_FLOAT	9
2.2.1.3	RDLOCATION_HEADER	10
2.2.2	Location Messages.....	11
2.2.2.1	RDLOCATION_SERVER_READY_PDU	11
2.2.2.2	RDLOCATION_CLIENT_READY_PDU	11
2.2.2.3	RDLOCATION_BASE_LOCATION3D_PDU.....	12
2.2.2.4	RDLOCATION_LOCATION2D_DELTA_PDU	13
2.2.2.5	RDLOCATION_LOCATION3D_DELTA_PDU	14
3	Protocol Details	16
3.1	Common Details	16
3.1.1	Abstract Data Model.....	16
3.1.1.1	Latitude	16
3.1.1.2	Longitude.....	16
3.1.1.3	Altitude.....	16
3.1.1.4	Speed.....	16
3.1.1.5	Heading	16
3.1.2	Timers	16
3.1.3	Initialization.....	17
3.1.4	Higher-Layer Triggered Events	17
3.1.5	Message Processing Events and Sequencing Rules	17
3.1.5.1	Processing a Location Message	17
3.1.6	Timer Events.....	17
3.1.7	Other Local Events.....	17
3.2	Server Details.....	17
3.2.1	Abstract Data Model.....	17
3.2.2	Timers	17
3.2.3	Initialization.....	17
3.2.4	Higher-Layer Triggered Events	17
3.2.5	Message Processing Events and Sequencing Rules	18
3.2.5.1	Sending an RDLOCATION_SERVER_READY_PDU Message	18
3.2.5.2	Processing an RDLOCATION_CLIENT_READY_PDU Message	18
3.2.5.3	Processing an RDLOCATION_BASE_LOCATION3D_PDU Message	18
3.2.5.4	Processing an RDLOCATION_LOCATION2D_DELTA_PDU Message	18
3.2.5.5	Processing an RDLOCATION_LOCATION3D_DELTA_PDU Message	18
3.2.6	Timer Events.....	19
3.2.7	Other Local Events.....	19
3.3	Client Details.....	19
3.3.1	Abstract Data Model.....	19
3.3.2	Timers	19

3.3.3	Initialization	19
3.3.4	Higher-Layer Triggered Events	19
3.3.5	Message Processing Events and Sequencing Rules	19
3.3.5.1	Processing an RDPLOCATION_SERVER_READY_PDU Message	19
3.3.5.2	Sending an RDPLOCATION_CLIENT_READY_PDU Message	19
3.3.5.3	Sending an RDPLOCATION_BASE_LOCATION3D_PDU Message	20
3.3.5.4	Sending an RDPLOCATION_LOCATION2D_DELTA_PDU Message	20
3.3.5.5	Sending an RDPLOCATION_LOCATION3D_DELTA_PDU Message	20
3.3.6	Timer Events.....	20
3.3.7	Other Local Events.....	20
4	Protocol Examples	21
5	Security	22
5.1	Security Considerations for Implementers	22
5.2	Index of Security Parameters	22
6	Appendix A: Product Behavior	23
7	Change Tracking.....	24
8	Index.....	25

1 Introduction

The Remote Desktop Protocol: Location Virtual Channel Extension (RDPEL) applies to the Remote Desktop Protocol: Basic Connectivity and Graphics Remoting, as defined in [\[MS-RDPBCGR\]](#). RDPEL is used to remote physical location parameters such as latitude, longitude, altitude, speed, and heading from a terminal server client to a terminal server. The current physical location of the client is encoded and then sent on the wire to the server. After this location data is received and decoded by the server, it is injected into the session associated with the remote user, effectively remoting the location parameters of the client.

Sections 1.5, 1.8, 1.9, 2, and 3 of this specification are normative. All other sections and examples in this specification are informative.

1.1 Glossary

This document uses the following terms:

ANSI character: An 8-bit Windows-1252 character set unit.

little-endian: Multiple-byte values that are byte-ordered with the least significant byte stored in the memory location with the lowest address.

protocol data unit (PDU): Information that is delivered as a unit among peer entities of a network and that may contain control information, address information, or data. For more information on remote procedure call (RPC)-specific PDUs, see [\[C706\]](#) section 12.

terminal server: The server to which a client initiates a remote desktop connection. The server hosts Remote Desktop sessions and enables interaction with each of these sessions on a connected client device.

MAY, SHOULD, MUST, SHOULD NOT, MUST NOT: These terms (in all caps) are used as defined in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

1.2 References

Links to a document in the Microsoft Open Specifications library point to the correct section in the most recently published version of the referenced document. However, because individual documents in the library are not updated at the same time, the section numbers in the documents may not match. You can confirm the correct section numbering by checking the [Errata](#).

1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact dochelp@microsoft.com. We will assist you in finding the relevant information.

[MS-RDPEDYC] Microsoft Corporation, "[Remote Desktop Protocol: Dynamic Channel Virtual Channel Extension](#)".

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <https://www.rfc-editor.org/info/rfc2119>

1.2.2 Informative References

[MS-RDPBCGR] Microsoft Corporation, "[Remote Desktop Protocol: Basic Connectivity and Graphics Remoting](#)".

1.3 Overview

The Remote Desktop Protocol: Location Virtual Channel Extension (RDPEL), defined in section 2.2, adds the ability to redirect the client's location (latitude, longitude and altitude) to a server so that location-based services running in a user session can provide a more contextualized experience where possible. It is used to remote physical location parameters such as latitude, longitude, altitude, speed, and heading from a terminal server client to a **terminal server**.

An example message flow that encapsulates the protocol phases and all the location protocol messages described in section 2.2.2 is presented in the following figure.

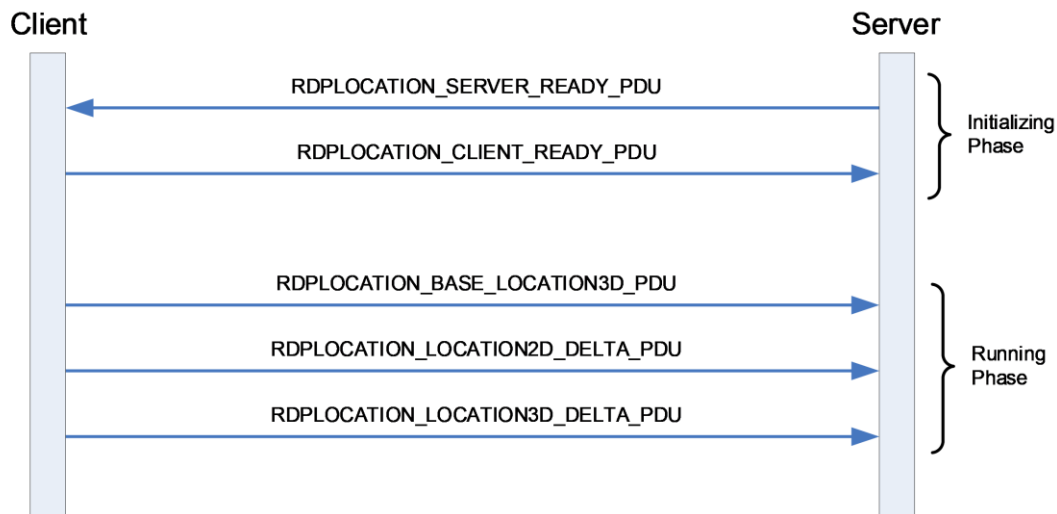


Figure 1: Messages exchanged by the location protocol endpoints

The location protocol is divided into two distinct phases:

- Initializing Phase
- Running Phase

The Initializing Phase occurs at the start of the connection. During this phase, the server and client exchange the RDPLOCATION_SERVER_READY_PDU (section 2.2.2.1) and RDPLOCATION_CLIENT_READY_PDU (section 2.2.2.2) messages. The server initiates this exchange when the dynamic virtual channel (sections 1.4 and 2.1) over which the location update messages will flow has been opened.

Once both endpoints are ready, the Running Phase is entered. During this phase, the client sends periodic location updates to the server encapsulated in the RDPLOCATION_BASE_LOCATION3D_PDU (section 2.2.2.3), RDPLOCATION_LOCATION2D_DELTA_PDU (section 2.2.2.4), and RDPLOCATION_LOCATION3D_DELTA_PDU (section 2.2.2.5) messages. The server decodes these updates and injects them into the user's session to ensure that any location-aware applications remain in-sync with the client's current position, altitude, speed, and heading.

1.4 Relationship to Other Protocols

The Remote Desktop Protocol: Location Virtual Channel Extension is embedded in a dynamic virtual channel transport, as specified in [MS-RDPEDYC] sections 1 to 3.

1.5 Prerequisites/Preconditions

The Remote Desktop Protocol: Location Virtual Channel Extension operates only after the dynamic virtual channel transport is fully established. If the dynamic virtual channel transport is terminated, the Remote Desktop Protocol: Location Virtual Channel Extension is also terminated. The protocol is terminated by closing the underlying virtual channel. For details about closing the dynamic virtual channel, see [\[MS-RDPEDYC\]](#) section 3.2.5.2.

1.6 Applicability Statement

The Remote Desktop Protocol: Location Virtual Channel Extension is applicable in scenarios where the location of the client device is required to provide a more relevant and contextually accurate user experience in the remote session hosted on a **terminal server**.

2 Messages

2.1 Transport

The Remote Desktop Protocol: Location Virtual Channel Extension is designed to operate over a dynamic virtual channel, as specified in [MS-RDPEDYC] sections 1 to 3. The dynamic virtual channel name is the null-terminated **ANSI character** string "Microsoft::Windows::RDS::Location". The usage of channel names in the context of opening a dynamic virtual channel is specified in [MS-RDPEDYC] section 2.2.2.1.

2.2 Message Syntax

The following sections specify the Remote Desktop Protocol: Location Virtual Channel Extension message syntax. All multiple-byte fields within a message **MUST** be marshaled in **little-endian** byte order, unless otherwise specified.

2.2.1 Common Data Types

2.2.1.1 FOUR_BYTE_SIGNED_INTEGER

The **FOUR_BYTE_SIGNED_INTEGER** structure is used to encode a value in the range -0x1FFFFFFF to 0x1FFFFFFF by using a variable number of bytes. The three most significant bits of the first byte encode the number of bytes in the structure and the sign.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
c		s	val1				val2 (optional)				val3 (optional)				val4 (optional)																

c (2 bits): A 2-bit unsigned integer field containing an encoded representation of the number of bytes in this structure.

Value	Meaning
ONE_BYTE_VAL 0	Implies that the optional val2 , val3 , and val4 fields are not present. Hence, the structure is 1 byte in size.
TWO_BYTE_VAL 1	Implies that the optional val2 field is present, while the optional val3 and val4 fields are not present. Hence, the structure is 2 bytes in size.
THREE_BYTE_VAL 2	Implies that the optional val2 and val3 fields are present, while the optional val4 field is not present. Hence, the structure is 3 bytes in size.
FOUR_BYTE_VAL 3	Implies that the optional val2 , val3 , and val4 fields are all present. Hence, the structure is 4 bytes in size.

S (1 bit): A 1-bit unsigned integer field containing an encoded representation of whether the value is positive or negative.

Value	Meaning
POSITIVE_VAL 0	Implies that the value represented by this structure is positive.

Value	Meaning
NEGATIVE_VAL 1	Implies that the value represented by this structure is negative.

Val1 (5 bits): A 5-bit unsigned integer field containing the most significant 5 bits of the value represented by this structure.

Val2 (1 byte, optional): An 8-bit unsigned integer containing the second most significant bits of the value represented by this structure.

Val3 (1 byte, optional): An 8-bit unsigned integer containing the third most significant bits of the value represented by this structure.

Val4 (1 byte, optional): An 8-bit unsigned integer containing the least significant bits of the value represented by this structure.

2.2.1.2 FOUR_BYTE_FLOAT

The **FOUR_BYTE_FLOAT** structure is used to encode a value in the range -0x3FFFFFF to 0x3FFFFFF to a precision of seven decimal places by using a variable number of bytes. The six most significant bits of the first byte encode the number of bytes in the structure, the sign and the exponent that MUST be used to reconstruct the value.

Depending on the value of the field **c**:

value = $(-1 \wedge s) * (val1 / (10 \wedge e))$ or

value = $(-1 \wedge s) * (((val1 \ll 8) + val2) / (10 \wedge e))$ or

value = $(-1 \wedge s) * (((val1 \ll 16) + (val2 \ll 8) + val3) / (10 \wedge e))$ or

value = $(-1 \wedge s) * (((val1 \ll 24) + (val2 \ll 16) + (val3 \ll 8) + val4) / (10 \wedge e))$

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31			
c		s	e			val1					val2 (optional)								val3 (optional)								val4 (optional)							

c (2 bits): A 2-bit unsigned integer field containing an encoded representation of the number of bytes in this structure.

Value	Meaning
ONE_BYTE_VAL 0	Implies that the optional val2 , val3 , and val4 fields are not present. Hence, the structure is 1 byte in size.
TWO_BYTE_VAL 1	Implies that the optional val2 field is present, while the optional val3 and val4 fields are not present. Hence, the structure is 2 bytes in size.
THREE_BYTE_VAL 2	Implies that the optional val2 and val3 fields are present, while the optional val4 field is not present. Hence, the structure is 3 bytes in size.
FOUR_BYTE_VAL 3	Implies that the optional val2 , val3 , and val4 fields are all present. Hence, the structure is 4 bytes in size.

s (1 bit): A 1-bit unsigned integer field containing an encoded representation of whether the value is positive or negative.

Value	Meaning
POSITIVE_VAL 0	Implies that the value represented by this structure is positive.
NEGATIVE_VAL 1	Implies that the value represented by this structure is negative.

e (3 bits): A 3-bit unsigned integer field containing the exponent of the value represented by this structure.

val1 (2 bits): A 2-bit unsigned integer field containing the most significant 2 bits of the value represented by this structure.

val2 (1 byte, optional): An 8-bit unsigned integer containing the second most significant bits of the value represented by this structure.

val3 (1 byte, optional): An 8-bit unsigned integer containing the third most significant bits of the value represented by this structure.

val4 (1 byte, optional): An 8-bit unsigned integer containing the least significant bits of the value represented by this structure.

2.2.1.3 RDPLOCATION_HEADER

The **RDPLOCATION_HEADER** structure is included in all location **protocol data units (PDUs)** and is used to identify the type and specify the length of the PDU.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
pduType																pduLength															
...																															

pduType (2 bytes): A 16-bit unsigned integer that identifies the type of the location PDU.


Value	Meaning
PDUTYPE_SERVER_READY 0x0001	RDPLOCATION_SERVER_READY_PDU (section 2.2.2.1)
PDUTYPE_CLIENT_READY 0x0002	RDPLOCATION_CLIENT_READY_PDU (section 2.2.2.2)
PDUTYPE_BASE_LOCATION3D 0x0003	RDPLOCATION_BASE_LOCATION3D_PDU (section 2.2.2.3)
PDUTYPE_LOCATION2D_DELTA 0x0004	RDPLOCATION_LOCATION2D_DELTA_PDU (section 2.2.2.4)
PDUTYPE_LOCATION3D_DELTA 0x0005	RDPLOCATION_LOCATION3D_DELTA_PDU (section 2.2.2.5)

pduLength (4 bytes): A 32-bit unsigned integer that specifies the length of the location PDU in bytes. This value MUST include the length of the **RDLOCATION_HEADER** (6 bytes).

2.2.2 Location Messages

2.2.2.1 RDLOCATION_SERVER_READY_PDU

The RDLOCATION_SERVER_READY_PDU message is sent by the server endpoint and is used to indicate readiness to commence with location remoting transactions.

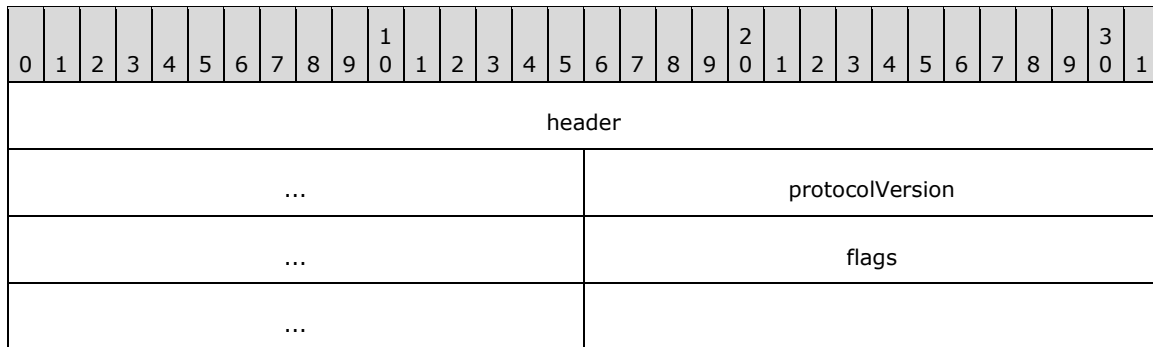

header (6 bytes): An RDLOCATION_HEADER (section [2.2.1.3](#)) structure. The **pduType** field MUST be set to PDUTYPE_SERVER_READY (0x0001).


protocolVersion (4 bytes): A 32-bit unsigned integer that specifies the location protocol version supported by the server.

Value	Meaning
RDLOCATION_PROTOCOL_VERSION_100 0x00010000	Version 1.0.0 of the RDP location remoting protocol. Servers advertising this version support the remoting of latitude, longitude, and altitude.
RDLOCATION_PROTOCOL_VERSION_200 0x00020000	Version 2.0.0 of the RDP location remoting protocol. Servers advertising this version support the remoting of latitude, longitude, altitude, speed, heading, horizontal accuracy, and source.

flags (4 bytes, optional): An optional 32-bit unsigned integer that contains protocol initialization flags. There are currently no flags to insert into this field.

2.2.2.2 RDLOCATION_CLIENT_READY_PDU

The RDLOCATION_CLIENT_READY_PDU message is sent by the client endpoint and is used to indicate readiness to commence with location remoting transactions.

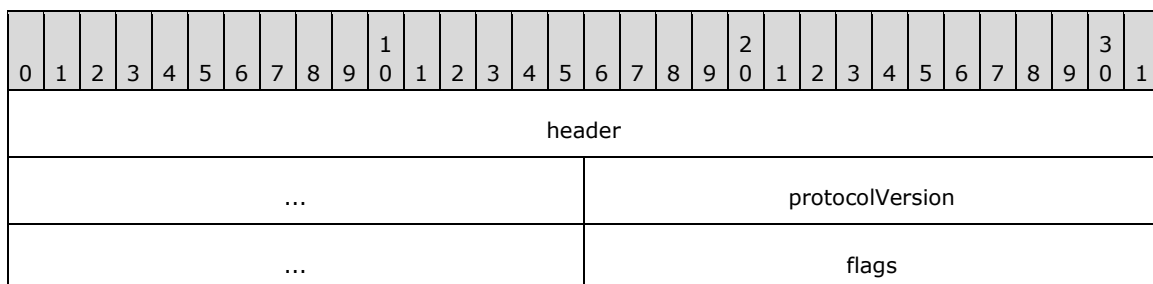

...

header (6 bytes): An RDPLOCATION_HEADER (section [2.2.1.3](#)) structure. The **pduType** field MUST be set to PDUTYPE_CLIENT_READY (0x0002).

protocolVersion (4 bytes): A 32-bit unsigned integer that specifies the location protocol version supported by the client.

Value	Meaning
RDPLOCATION_PROTOCOL_VERSION_100 0x00010000	Version 1.0.0 of the RDP location remoting protocol. Clients advertising this version support the remoting of latitude, longitude, and altitude.
RDPLOCATION_PROTOCOL_VERSION_200 0x00020000	Version 2.0.0 of the RDP location remoting protocol. Clients advertising this version support the remoting of latitude, longitude, altitude, speed, heading, horizontal accuracy and source.

flags (4 bytes, optional): An optional 32-bit unsigned integer that contains protocol initialization flags. Currently there are no flags to insert into this field.

2.2.2.3 RDPLOCATION_BASE_LOCATION3D_PDU

The RDPLOCATION_BASE_LOCATION3D_PDU message is sent by the client endpoint and is used to specify the physical location and attributes related to the client's position and movement.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
header																															
...																latitude (variable)															
...																															
longitude (variable)																															
...																															
altitude (variable)																															
...																															
speed (variable)																															
...																															
heading (variable)																															
...																															

horizontalAccuracy (variable)	
...	
source (optional)	

header (6 bytes): An RDPLOCATION_HEADER (section [2.2.1.3](#)) structure. The **pduType** field MUST be set to PDUTYPE_BASE_LOCATION3D (0x0003).

latitude (variable): A FOUR_BYTE_FLOAT (section [2.2.1.2](#)) structure that specifies the latitude in degrees.

longitude (variable): A FOUR_BYTE_FLOAT (section 2.2.2.2) structure that specifies the longitude in degrees.

altitude (variable): A FOUR_BYTE_SIGNED_INTEGER (section [2.2.1.1](#)) structure that specifies the altitude in meters.

speed (variable): An optional FOUR_BYTE_FLOAT (section 2.2.2.2) structure that specifies the speed in meters per second.

heading (variable): An optional FOUR_BYTE_FLOAT (section 2.2.2.2) structure that specifies the heading in degrees. This field MUST be present if the **speed** field is present.


horizontalAccuracy (variable): An optional FOUR_BYTE_FLOAT (section 2.2.2.2) structure that specifies the horizontal accuracy in meters. This field MUST be present if the **heading** field is present.

source (1 byte): An optional 8-bit unsigned integer that specifies the source of the location data. This field MUST be present if the **horizontalAccuracy** field is present.

Value	Meaning
LOCATIONSOURCE_IP 0x00	IP address
LOCATIONSOURCE_WIFI 0x01	WiFi
LOCATIONSOURCE_CELL 0x02	Cellular
LOCATIONSOURCE_GNSS 0x03	Global Navigation Satellite System

2.2.2.4 RDPLOCATION_LOCATION2D_DELTA_PDU

The RDPLOCATION_LOCATION2D_DELTA_PDU message is sent by the client endpoint and is used to specify a change in location that does not include altitude.

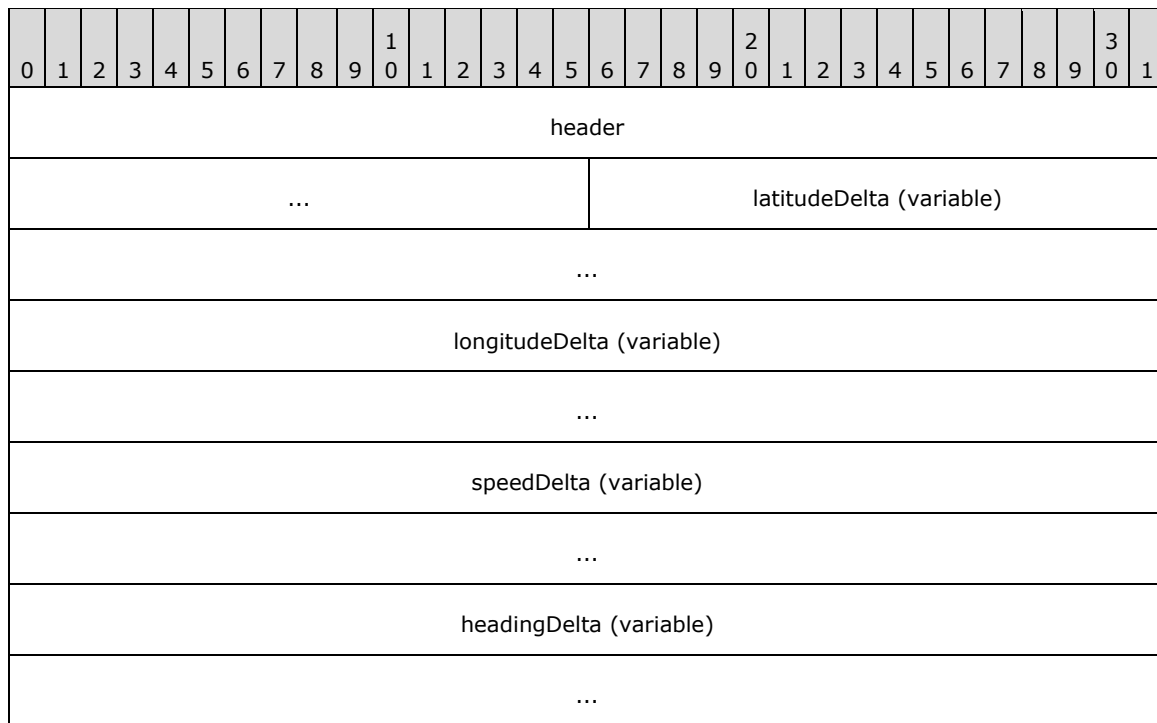

header (6 bytes): An RDPLOCATION_HEADER (section [2.2.1.3](#)) structure. The **pduType** field MUST be set to PDUTYPE_LOCATION2D_DELTA (0x0004).

latitudeDelta (variable): A FOUR_BYTE_FLOAT (section [2.2.1.2](#)) structure that specifies the change in latitude since the last location update.

$$\text{currentLatitude} = \text{previousLatitude} - \text{latitudeDelta}$$

longitudeDelta (variable): A FOUR_BYTE_FLOAT (section [2.2.2.2](#)) structure that specifies the change in longitude since the last location update.

$$\text{currentLongitude} = \text{previousLongitude} - \text{longitudeDelta}$$

speedDelta (variable): A FOUR_BYTE_FLOAT (section [2.2.2.2](#)) structure that specifies the change in speed since the last location update.

$$\text{currentSpeed} = \text{previousSpeed} - \text{speedDelta}$$

headingDelta (variable): A FOUR_BYTE_FLOAT (section [2.2.2.2](#)) structure that specifies the change in heading since the last location update.

$$\text{currentHeading} = \text{previousHeading} - \text{headingDelta}$$

This field MUST be present if the **speedDelta** field is present.

2.2.2.5 RDPLOCATION_LOCATION3D_DELTA_PDU

The RDPLOCATION_LOCATION3D_DELTA_PDU message is sent by the client endpoint and is used to specify a change in location.

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
header																															
...																latitudeDelta (variable)															
...																															
longitudeDelta (variable)																															
...																															
altitudeDelta (variable)																															
...																															
speedDelta (variable)																															
...																															
headingDelta (variable)																															
...																															

header (6 bytes): An RDPLOCATION_HEADER (section [2.2.1.3](#)) structure. The **pduType** field MUST be set to PDUTYPE_LOCATION3D_DELTA (0x0005).

latitudeDelta (variable): A FOUR_BYTE_FLOAT (section [2.2.1.2](#)) structure that that specifies the change in latitude since the last location update.

$$\text{currentLatitude} = \text{previousLatitude} - \text{latitudeDelta}$$

longitudeDelta (variable): A FOUR_BYTE_FLOAT (section [2.2.2.2](#)) structure that specifies the change in longitude since the last location update.

$$\text{currentLongitude} = \text{previousLongitude} - \text{longitudeDelta}$$

altitudeDelta (variable): A FOUR_BYTE_SIGNED_INTEGER (section [2.2.1.1](#)) structure that specifies the change in altitude since the last location update.

$$\text{currentAltitude} = \text{previousAltitude} - \text{altitudeDelta}$$

speedDelta (variable): A FOUR_BYTE_FLOAT (section [2.2.2.2](#)) structure that specifies the change in speed since the last location update.

$$\text{currentSpeed} = \text{previousSpeed} - \text{speedDelta}$$

headingDelta (variable): A FOUR_BYTE_FLOAT (section [2.2.2.2](#)) structure that specifies the change in heading since the last location update.

$$\text{currentHeading} = \text{previousHeading} - \text{headingDelta}$$

This field MUST be present if the **speedDelta** field is present.

3 Protocol Details

3.1 Common Details

3.1.1 Abstract Data Model

This section describes a conceptual model of possible data organization that an implementation maintains to participate in this protocol. The described organization is provided to facilitate the explanation of how the protocol behaves. This document does not mandate that implementations adhere to this model as long as their external behavior is consistent with that described in this document.

Note It is possible to implement the following conceptual data by using a variety of techniques as long as the implementation produces external behavior that is consistent with that described in this document.

3.1.1.1 Latitude

The Latitude store contains the most recently sent or received client latitude and is used as the basis for delta calculations. This store **MUST** be updated when sending or processing the RDPLOCATION_BASE_LOCATION3D_PDU (section [2.2.2.3](#)), RDPLOCATION_LOCATION2D_DELTA_PDU (section [2.2.2.4](#)), or RDPLOCATION_LOCATION3D_DELTA_PDU (section [2.2.2.5](#)) messages.

3.1.1.2 Longitude

The Longitude store contains the most recently sent or received client longitude and is used as the basis for delta calculations. This store **MUST** be updated when sending or processing the RDPLOCATION_BASE_LOCATION3D_PDU (section [2.2.2.3](#)), RDPLOCATION_LOCATION2D_DELTA_PDU (section [2.2.2.4](#)), or RDPLOCATION_LOCATION3D_DELTA_PDU (section [2.2.2.5](#)) messages.

3.1.1.3 Altitude

The Altitude store contains the most recently sent or received client altitude and is used as the basis for delta calculations. This store **MUST** be updated when sending or processing the RDPLOCATION_BASE_LOCATION3D_PDU (section [2.2.2.3](#)), RDPLOCATION_LOCATION2D_DELTA_PDU (section [2.2.2.4](#)) or RDPLOCATION_LOCATION3D_DELTA_PDU (section [2.2.2.5](#)) messages.

3.1.1.4 Speed

The Speed store contains the most recently sent or received client speed and is used as the basis for delta calculations. This store **MUST** be updated when sending or processing the RDPLOCATION_BASE_LOCATION3D_PDU (section [2.2.2.3](#)), RDPLOCATION_LOCATION2D_DELTA_PDU (section [2.2.2.4](#)) or RDPLOCATION_LOCATION3D_DELTA_PDU (section [2.2.2.5](#)) messages.

3.1.1.5 Heading

The Heading store contains the most recently sent or received client heading and is used as the basis for delta calculations. This store **MUST** be updated when sending or processing the RDPLOCATION_BASE_LOCATION3D_PDU (section [2.2.2.3](#)), RDPLOCATION_LOCATION2D_DELTA_PDU (section [2.2.2.4](#)) or RDPLOCATION_LOCATION3D_DELTA_PDU (section [2.2.2.5](#)) messages.

3.1.2 Timers

None.

3.1.3 Initialization

None.

3.1.4 Higher-Layer Triggered Events

None.

3.1.5 Message Processing Events and Sequencing Rules

3.1.5.1 Processing a Location Message

All location messages are prefaced by the RDPLOCATION_HEADER (section [2.2.1.3](#)) structure.

When a location message is processed, the **pduType** field in the header MUST first be examined to determine if the message is within the subset of expected messages as described in section [1.3](#). If the message is not expected, it SHOULD be ignored.

If the message is in the correct sequence, the **pduLength** field MUST be examined to make sure that it is consistent with the amount of data read from the "Microsoft::Windows::RDS::Location" dynamic virtual channel (section [2.1](#)). If this is not the case, the message SHOULD be ignored.

3.1.6 Timer Events

None.

3.1.7 Other Local Events

None.

3.2 Server Details

3.2.1 Abstract Data Model

None.

3.2.2 Timers

None.

3.2.3 Initialization

The server MUST send the RDPLOCATION_SERVER_READY_PDU (section [2.2.2.1](#)) message to the client, as specified in section [3.2.5.1](#), to initiate the process of remoting location data.

3.2.4 Higher-Layer Triggered Events

None.

3.2.5 Message Processing Events and Sequencing Rules

3.2.5.1 Sending an RDPLOCATION_SERVER_READY_PDU Message

The structure and fields of the RDPLOCATION_SERVER_READY_PDU message are specified in section [2.2.2.1](#).

If the server does not support location injection, then it MUST NOT send this **PDU** to the client. The protocolVersion field SHOULD be set to at least RDPLOCATION_PROTOCOL_V200 (0x00020000) if the server supports the injection of speed, heading, horizontal accuracy and source location data.

3.2.5.2 Processing an RDPLOCATION_CLIENT_READY_PDU Message

The structure and fields of the RDPLOCATION_CLIENT_READY_PDU message are specified in section [2.2.2.2](#).

The **header** field MUST be processed as specified in section [3.1.5.1](#). If the message is valid, the server SHOULD perform any necessary steps to initialize the location injection subsystem.

3.2.5.3 Processing an RDPLOCATION_BASE_LOCATION3D_PDU Message

The structure and fields of the RDPLOCATION_BASE_LOCATION3D_PDU message are specified in section [2.2.2.3](#).

The header field MUST be processed as specified in section [3.1.5.1](#). If the message is valid, the server MUST extract the location data and inject it into the user session. After injecting the location data, the server MUST store the latitude, longitude, altitude, speed and heading to ensure that subsequent RDPLOCATION_LOCATION2D_DELTA_PDU (section [2.2.2.4](#)) and RDPLOCATION_LOCATION3D_DELTA_PDU (section [2.2.2.5](#)) messages can be processed.

3.2.5.4 Processing an RDPLOCATION_LOCATION2D_DELTA_PDU Message

The structure and fields of the RDPLOCATION_LOCATION2D_DELTA_PDU message are specified in section [2.2.2.4](#).

The **header** field MUST be processed as specified in section [3.1.5.1](#). If the message is valid, the server MUST extract the location deltas, compute the current values (using the Abstract Data Model defined in section [3.1.1](#)), and inject the updated location data into the user session. After injecting the location data, the server MUST update the Abstract Data Model by storing the updated latitude, longitude, altitude, speed, and heading to ensure that subsequent RDPLOCATION_LOCATION2D_DELTA_PDU (section [2.2.2.4](#)) and RDPLOCATION_LOCATION3D_DELTA_PDU (section [2.2.2.5](#)) messages can be processed.

3.2.5.5 Processing an RDPLOCATION_LOCATION3D_DELTA_PDU Message

The structure and fields of the RDPLOCATION_LOCATION3D_DELTA_PDU message are specified in section [2.2.2.5](#).

The **header** field MUST be processed as specified in section [3.1.5.1](#). If the message is valid, the server MUST extract the location deltas, compute the current values (using the Abstract Data Model defined in section [3.1.1](#)), and inject the updated location data into the user session. After injecting the location data, the server MUST update the Abstract Data Model by storing the updated latitude, longitude, altitude, speed and heading to ensure that subsequent RDPLOCATION_LOCATION2D_DELTA_PDU (section [2.2.2.4](#)) and RDPLOCATION_LOCATION3D_DELTA_PDU (section [2.2.2.5](#)) messages can be processed.

3.2.6 Timer Events

None.

3.2.7 Other Local Events

None.

3.3 Client Details

3.3.1 Abstract Data Model

None.

3.3.2 Timers

None.

3.3.3 Initialization

The client SHOULD NOT open the "Microsoft::Windows::RDS::Location" virtual channel transport (section [2.1](#)) if it is unable to query the local subsystem for location data. The client MUST send the RDPLOCATION_CLIENT_READY_PDU (section [2.2.2.2](#)) message to the server, as specified in section [3.3.5.2](#), to initiate the process of remoting location data.

3.3.4 Higher-Layer Triggered Events

None.

3.3.5 Message Processing Events and Sequencing Rules

3.3.5.1 Processing an RDPLOCATION_SERVER_READY_PDU Message

The structure and fields of the RDPLOCATION_SERVER_READY_PDU message are specified in section [2.2.2.1](#).

The header field MUST be processed as specified in section [3.1.5.1](#). If the message is valid, the client SHOULD initialize the location acquisition subsystem and then send an RDPLOCATION_CLIENT_READY_PDU (section [2.2.2.2](#)) message to the server, as specified in section [3.3.5.2](#).

3.3.5.2 Sending an RDPLOCATION_CLIENT_READY_PDU Message

The structure and fields of the RDPLOCATION_CLIENT_READY_PDU message are specified in section [2.2.2.2](#).

If the client does not support location remoting, then it MUST NOT send this PDU to the server. The **protocolVersion** field SHOULD be set to at least RDPLOCATION_PROTOCOL_V200 (0x00020000) if the client supports the acquisition and sending of speed, heading, horizontal accuracy and location data source.

3.3.5.3 Sending an RDPLOCATION_BASE_LOCATION3D_PDU Message

The structure and fields of the RDPLOCATION_BASE_LOCATION3D_PDU message are specified in section [2.2.2.3](#).

After encoding and transmitting the location data, the client MUST store the latitude, longitude, altitude, speed, and heading in the Abstract Data Model (section [3.1.1](#)) to ensure that subsequent RDPLOCATION_LOCATION2D_DELTA_PDU (section [2.2.2.4](#)) and RDPLOCATION_LOCATION3D_DELTA_PDU (section [2.2.2.5](#)) messages can be constructed and transmitted.

3.3.5.4 Sending an RDPLOCATION_LOCATION2D_DELTA_PDU Message

The structure and fields of the RDPLOCATION_LOCATION2D_DELTA_PDU message are specified in section [2.2.2.4](#).

The latitude, longitude, speed, and heading stored in the Abstract Data Model (section [3.1.1](#)) MUST be used to calculate the value for each delta field.

latitudeDelta = previousLatitude – currentLatitude

longitudeDelta = previousLongitude – currentLongitude

speedDelta = previousSpeed – currentSpeed

headingDelta = previousHeading – currentHeading

After encoding and transmitting the location data, the client MUST update the Abstract Data Model with the current latitude, longitude, speed, and heading.

3.3.5.5 Sending an RDPLOCATION_LOCATION3D_DELTA_PDU Message

The structure and fields of the RDPLOCATION_LOCATION3D_DELTA_PDU message are specified in section [2.2.2.5](#).

The values stored in the Abstract Data Model (section [3.1.1](#)) MUST be used to calculate the value for each delta field.

latitudeDelta = previousLatitude – currentLatitude

longitudeDelta = previousLongitude – currentLongitude

altitudeDelta = previousAltitude – currentAltitude

speedDelta = previousSpeed – currentSpeed

headingDelta = previousHeading – currentHeading

After encoding and transmitting the location data, the client MUST update the Abstract Data Model with the current latitude, longitude, altitude, speed, and heading.

3.3.6 Timer Events

None.

3.3.7 Other Local Events

None.

4 Protocol Examples

None.

5 Security

5.1 Security Considerations for Implementers

None.

5.2 Index of Security Parameters

None.

6 Appendix A: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include updates to those products.

- Windows 11 operating system
- Windows Server 2022, 23H2 operating system

Exceptions, if any, are noted in this section. If an update version, service pack or Knowledge Base (KB) number appears with a product name, the behavior changed in that update. The new behavior also applies to subsequent updates unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms "SHOULD" or "SHOULD NOT" implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term "MAY" implies that the product does not follow the prescription.

7 Change Tracking

No table of changes is available. The document is either new or has had no changes since its last release.

8 Index

A

Abstract data model
[client](#) 19
[common details](#) 16
[server](#) 17
[Applicability](#) 7

C

[Change tracking](#) 24
Client
[abstract data model](#) 19
higher-layer triggered events ([section 3.1.4](#) 17, [section 3.3.4](#) 19)
initialization ([section 3.1.3](#) 17, [section 3.3.3](#) 19)
[local events](#) 17
[message processing](#) 17
[other local events](#) 20
[sequencing rules](#) 17
timer events ([section 3.1.6](#) 17, [section 3.3.6](#) 20)
timers ([section 3.1.2](#) 16, [section 3.3.2](#) 19)
Common details
[abstract data model](#) 16
[processing a location message](#) 17

D

Data model - abstract
[client](#) 19
[server](#) 17
Data model - abstract
[common](#) 16

F

[FOUR_BYTE_FLOAT message](#) 9
[FOUR_BYTE_SIGNED_INTEGER message](#) 8

G

[Glossary](#) 5

H

Higher-layer triggered events
client ([section 3.1.4](#) 17, [section 3.3.4](#) 19)
server ([section 3.1.4](#) 17, [section 3.2.4](#) 17)

I

[Implementer - security considerations](#) 22
[Index of security parameters](#) 22
[Informative references](#) 5
Initialization
client ([section 3.1.3](#) 17, [section 3.3.3](#) 19)
server ([section 3.1.3](#) 17, [section 3.2.3](#) 17)
[Introduction](#) 5

L

Local events

[client](#) 17
[server](#) 17

M

Message processing
[client](#) 17
[server](#) 17
Messages
[FOUR_BYTE_FLOAT](#) 9
[FOUR_BYTE_SIGNED_INTEGER](#) 8
[RDPLOCATION_BASE_LOCATION3D_PDU](#) 12
[RDPLOCATION_CLIENT_READY_PDU](#) 11
[RDPLOCATION_HEADER](#) 10
[RDPLOCATION_LOCATION2D_DELTA_PDU](#) 13
[RDPLOCATION_LOCATION3D_DELTA_PDU](#) 14
[RDPLOCATION_SERVER_READY_PDU](#) 11
[syntax](#) 8
[transport](#) 8
Messages - common
[processing a location](#) 17

N

[Normative references](#) 5

O

Other local events
[client](#) 20
[server](#) 19
[Overview \(synopsis\)](#) 6

P

[Parameters - security index](#) 22
[Preconditions](#) 7
[Prerequisites](#) 7
Processing a location message
[common details](#) 17
[Product behavior](#) 23

R

[RDPLOCATION_BASE_LOCATION3D_PDU message](#) 12
[RDPLOCATION_CLIENT_READY_PDU message](#) 11
[RDPLOCATION_HEADER message](#) 10
[RDPLOCATION_LOCATION2D_DELTA_PDU message](#) 13
[RDPLOCATION_LOCATION3D_DELTA_PDU message](#) 14
[RDPLOCATION_SERVER_READY_PDU message](#) 11
[References](#) 5
[informative](#) 5
[normative](#) 5
[Relationship to other protocols](#) 6

S

Security
[implementer considerations](#) 22

[parameter index](#) 22
Sequencing rules
 [client](#) 17
 [server](#) 17
Server
 [abstract data model](#) 17
 higher-layer triggered events ([section 3.1.4](#) 17, [section 3.2.4](#) 17)
 initialization ([section 3.1.3](#) 17, [section 3.2.3](#) 17)
 [local events](#) 17
 [message processing](#) 17
 [other local events](#) 19
 [sequencing rules](#) 17
 timer events ([section 3.1.6](#) 17, [section 3.2.6](#) 19)
 timers ([section 3.1.2](#) 16, [section 3.2.2](#) 17)
[Syntax](#) 8

T

Timer events
 client ([section 3.1.6](#) 17, [section 3.3.6](#) 20)
 server ([section 3.1.6](#) 17, [section 3.2.6](#) 19)
Timers
 client ([section 3.1.2](#) 16, [section 3.3.2](#) 19)
 server ([section 3.1.2](#) 16, [section 3.2.2](#) 17)
[Tracking changes](#) 24
[Transport](#) 8
Triggered events - higher-layer
 client ([section 3.1.4](#) 17, [section 3.3.4](#) 19)
 server ([section 3.1.4](#) 17, [section 3.2.4](#) 17)